

selos / fasis

DIN Rail Terminal Blocks with
Screw, Tension Spring and Push-In
Connection Technologies

Catalog 2017





▲ Plant II, Rodezstraße in Bamberg



▲ Company headquarters in Bamberg



▲ STOCKO main plant in Wuppertal



wieland group

AT HOME ALL OVER THE WORLD

Wieland Electric GmbH is a medium-sized family-run electrical and electronics company headquartered in Bamberg. Founded in 1910, Wieland is one of the pioneers of electrical connection technology.

This family business with its international outlook is a market leader in pluggable installation technology for functional buildings, with subsidiaries worldwide and production lines not only in Bamberg but also in the Czech Republic and China.

The Wieland Group, which has included STOCKO Contact GmbH & Co. KG since 1998, is therefore represented in over 70 countries and employs some 2,200 people.

Solutions for

Building technology

Wind power

Machine building

Lighting technology

Heating, ventilation, air conditioning



Product portfolio

- Electronic and electrical engineering for the control cabinet
- Safety technology
- Network and field bus systems
- Energy bus systems for industry and buildings
- Connectors up to protection type IP6X
- Building automation
- PCB terminals and plug connectors
- Sensor/actuator cabling



Industries

- Machine building
- Construction machines & cranes
- Buildings and lighting
- Logistics
- Power engineering
- Renewable energy sources
- Heating, ventilation and air conditioning systems



Business services

- Pre-assembly and wiring
- Product labeling service
- Integrated solutions inside distributors
- Customized solutions
- On-site project support
- Optimization of decentralized, pluggable installation solutions
- Certified machine safety tests



Safety training

- Software validation
- CSE certified safety engineers
- Basics and standards of functional safety
- Modification of old machines and major changes
- Design of safety functions and calculation with Sistema
- Machinery Directive, liability issues and CE conformity explanations



Software/configuration tools

- **wieplan** CLICK2BUY, configuration of terminal strips including online order
- **wieprint**, Marking systems for DIN rail terminal blocks, cables and control cabinet
- **revos** configurator for connectors
- **gesis**®PLAN for building installation
- **podis**®PLAN for configuring the **podis**® energy bus system
- **samos**®PLAN6, programming tool for **samos**®PRO COMPACT




Why Wieland?

- Standardized industrial solutions
- Customized solutions
- Support for your project
- Broad product portfolio
- Application worldwide due to international licenses
- Group-wide observance of human rights, including at suppliers
- Eco-friendly production



Wieland DIN Rail Terminal Blocks – Overview


DIN rail terminal blocks with screw connection




Feed-through blocks
starting at page 14




Ground blocks
starting at page 18



Duo feed-through blocks
starting at page 22




Knife edge
disconnect blocks
starting at page 22 + 33




Multi-tier blocks
starting at page 24




Initiator blocks
starting at page 28




Fuse blocks
starting at page 30




DIN rail terminal blocks
with plug-in connection
starting at page 36



Function blocks
starting at page 26 + 40



Instrument isolating
terminals
starting at page 42




DIN rail terminal blocks
with ring lug connection
starting at page 47




High current terminal blocks
starting at page 48



Mini blocks
starting at page 56



DIN rail terminal blocks
for installation distribution
boards starting at page 58



Triple-deck terminal blocks for
installation distribution boards
starting at page 62



selos CLASSIC
starting at page 64

Software page 8 / 9




DIN rail terminal blocks with tension spring connection



Feed-through blocks starting at page 74




Ground blocks starting at page 82



Multi-tier blocks starting at page 90



Knife edge disconnect blocks starting at page 100

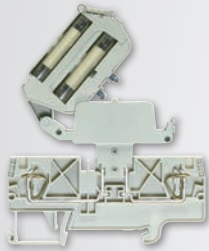


Fuse blocks starting at page 102




DIN rail terminal blocks with plug-in connection starting at page 106



Initiator blocks starting at page 112



Mini blocks starting at page 116




DIN rail terminal blocks for installation distribution boards starting at page 123




Triple-deck terminal blocks for installation distribution boards starting at page 126


DIN rail terminal blocks with push-in connection




Feed-through blocks starting at page 132



Ground blocks starting at page 134




Multi-tier blocks starting at page 136

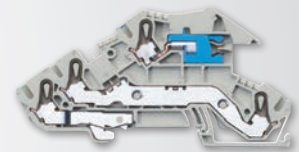

Triple-deck terminal blocks for installation distribution boards starting at page 138


Accessories starting at page 140




Service starting at page 168




DIN rail terminal blocks with screw connection – **selos**

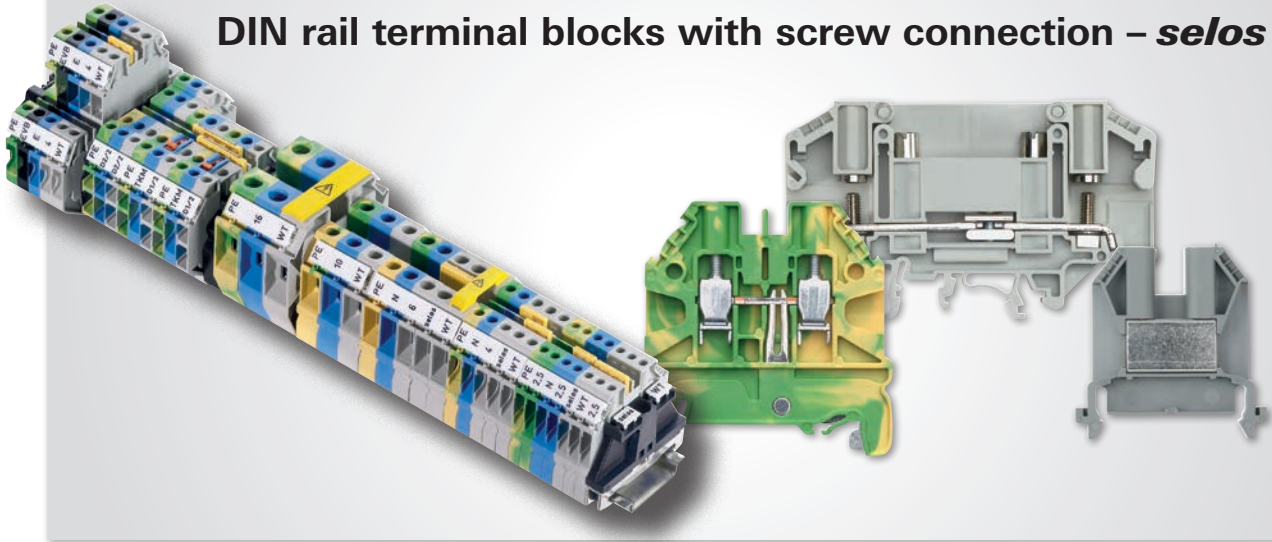

DIN rail terminal blocks with push-in connection – **fasis WTP**

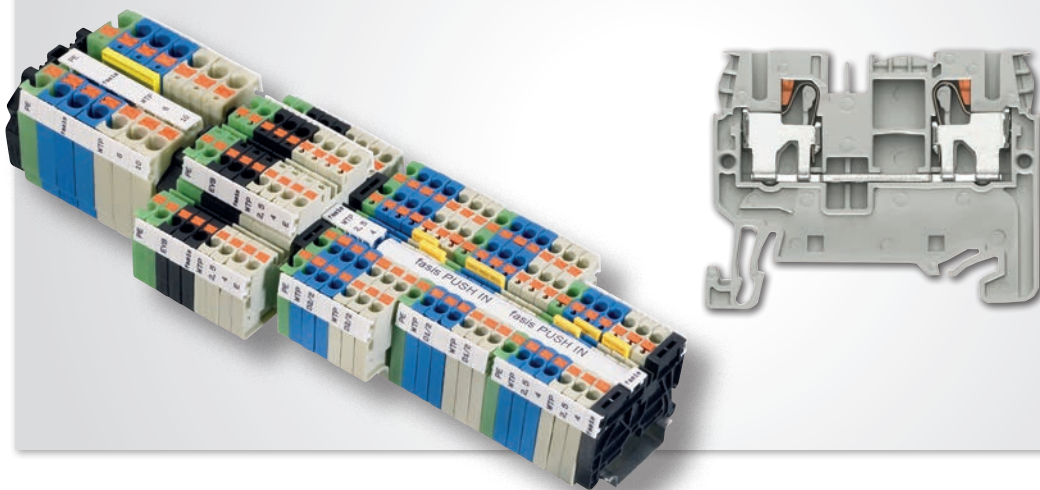

DIN rail terminal blocks with tension spring connection – **fasis WKFN**

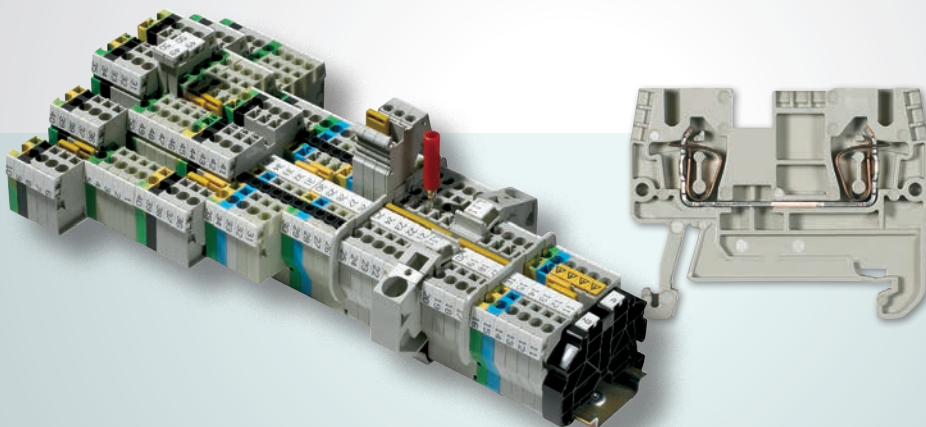

One System – Many Possibilities

Three product families, three connection technologies – our DIN rail terminal block program is the right choice for every installation, wherever the control cabinet is found – in machinery or plant engineering, energy technology or building installation, or with screw, tension spring or push-in connection.

The ultimately flexible DIN rail terminal block systems **selos** and **fasis** offer optimum handling and harmonized accessories. This guarantees not only fast wiring time, but also reduces cost of inventory at your facility and in the supply chain.

Customized assembly service, customer-specific solutions and a comprehensive service portfolio match our products individually with the requirements of our customers.

Accessories, software and service





www.wieplan.com



wieplan CLICK2BUY

The new online configurator with express service:
From idea to completed terminal block in 5 steps!

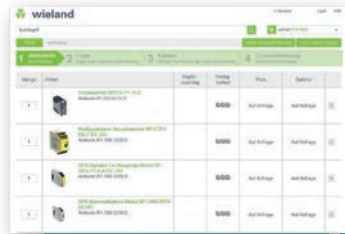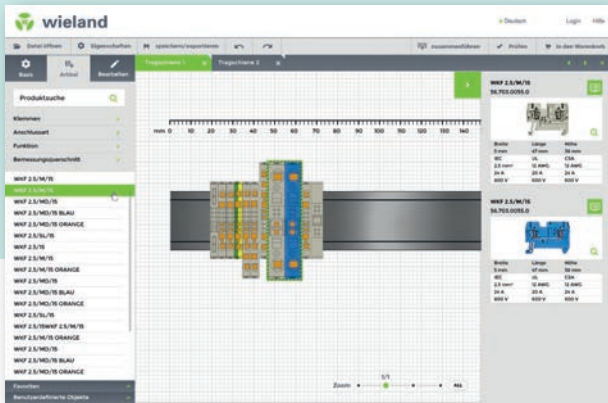


Express delivery service

→ in 5 workdays maximum


Immediate pricing

→ Online ordering service

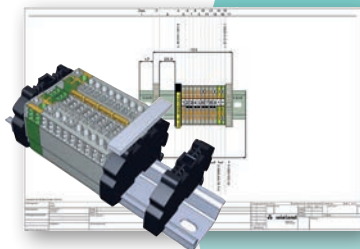

Documentation

→ Complete documentation, including 3-D data

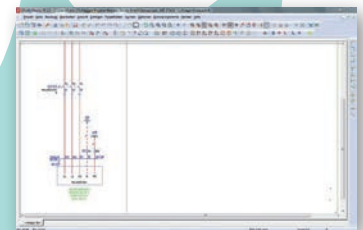

Design in CAE system

→ Interface to **wieplan**




Product selection in wieplan

→ Simple, intuitive operation

Plan, assemble and order DIN rail terminals

We offer a comprehensive service portfolio to supplement our products. Our new planning tool **wieplan** for planning and configuring DIN rail terminals and our express assembly service for complete modules make working with Wieland DIN rail terminals easier and create genuine added value.


Just 5 steps to a complete terminal block:

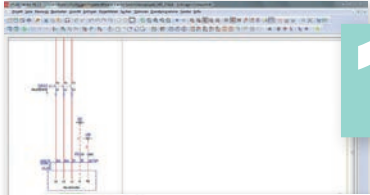

1

Design


- Interface / data exchange with all current CAE tools
- Bidirectional interface with EPLAN

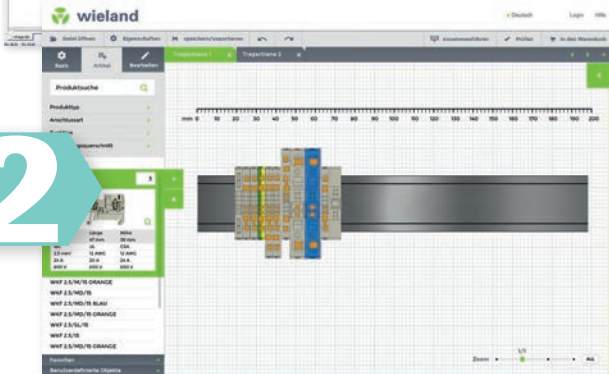

2

Product selection


- Automatic transfer of project data from circuit diagram
- Selection made easy

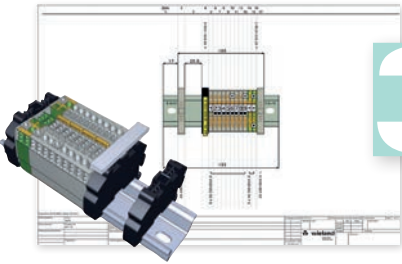

3

Documentation


- Parts lists as PDF or XLS
- Construction data in 2-D or 3-D
- Marking data for further processing in **wiemark** and **wieprint**



4

Pricing and ordering



- Online shopping cart function
- Easy pricing



5

Assembly and delivery

- Express delivery in 5 days

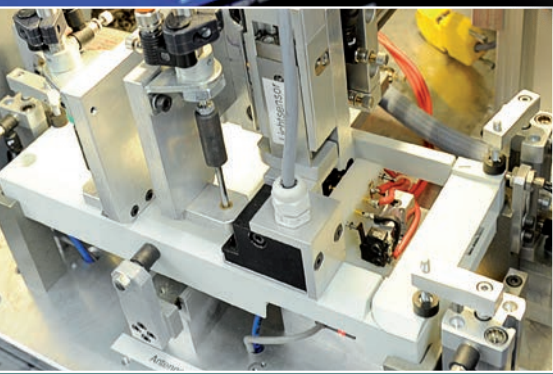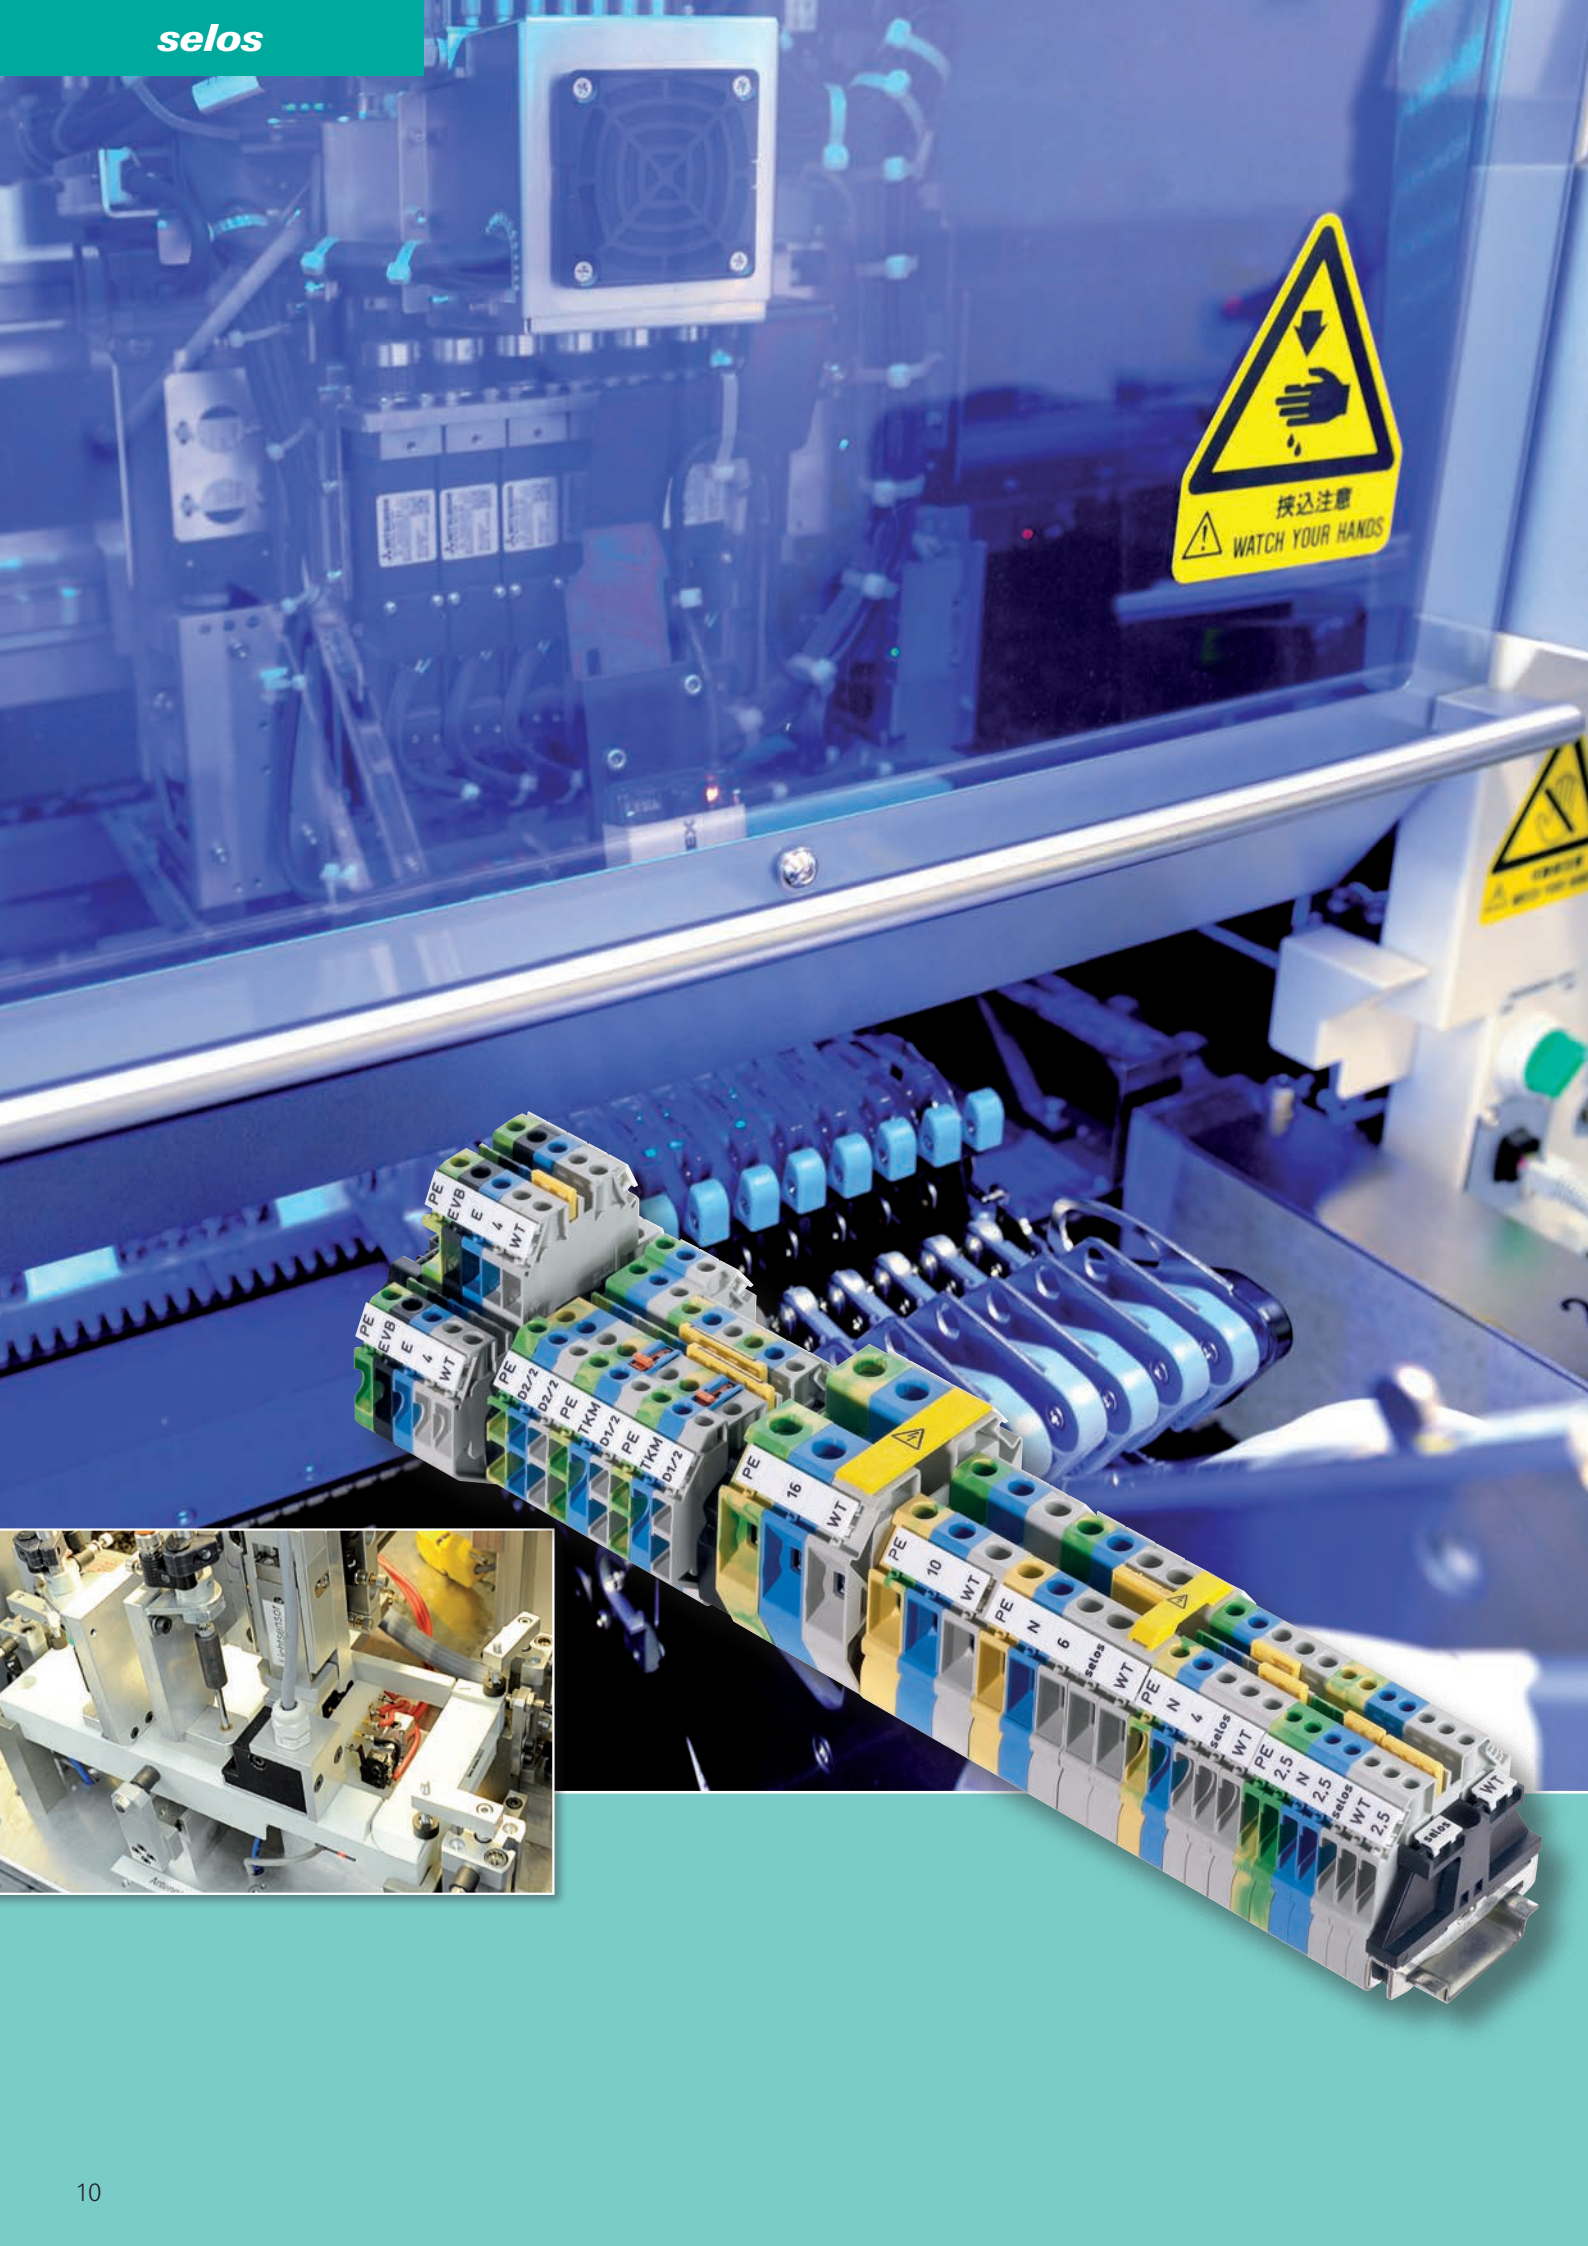

selos

DIN Rail Terminal Blocks with Screw Connection

Reliable connection, proven concept! **selos** is our DIN rail terminal block with screw connection, solid and functional, known worldwide, and in use millions of times over.



The **selos** series combines the classic screw connection with modern connection technology, with the focus on customer benefits and increased efficiency in wiring and the supply chain.

The **selos** CLASSIC series offers the highest-quality connecting technology. Thanks to its unique clamping body design, aluminum or copper wire connections are long-lasting and maintenance-free.

The **selos** product line includes feed-through and ground blocks with 2, 3 or 4 termination points, multi-tier blocks in two- and three-tier designs, knife-edge disconnect blocks and fuse blocks. In addition, specialty function blocks are available with a wide variety of diode circuits and diverse application-specific terminals, such as transformer disconnect terminals.



selos has been designed for use in machinery and plant construction as well as hazardous locations subject to explosion.

Connection cross-section up to 300 mm²
 Rated current up to 520 A
 Rated voltage up to 1000 V

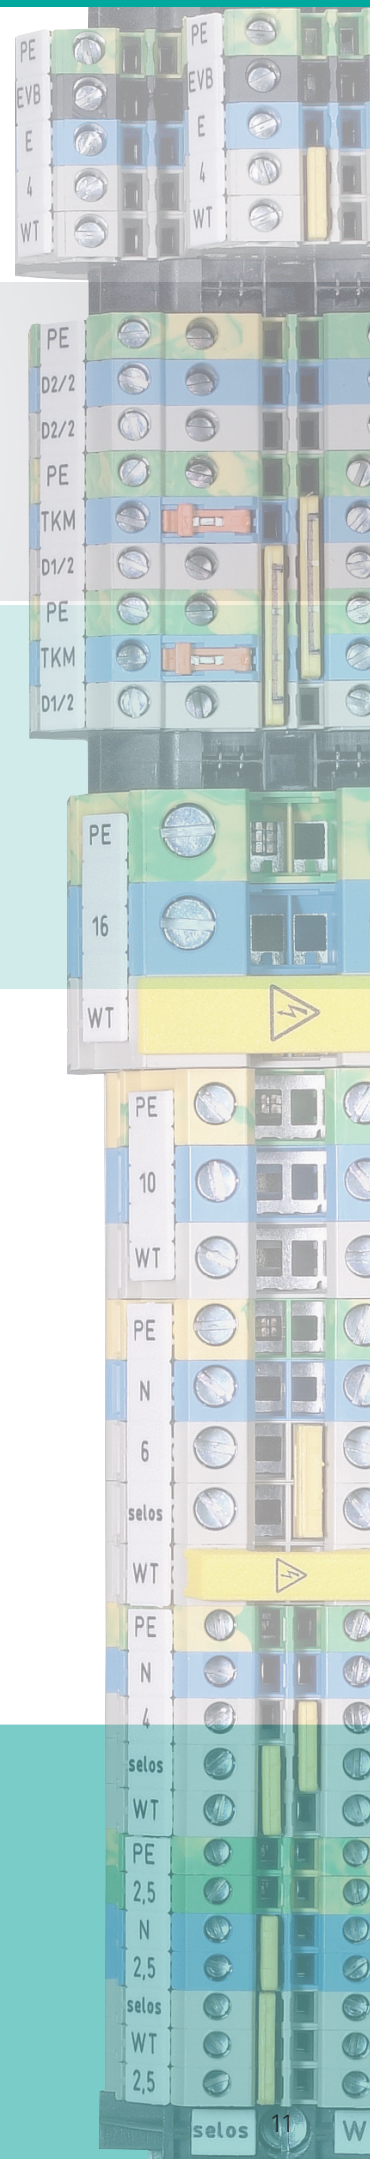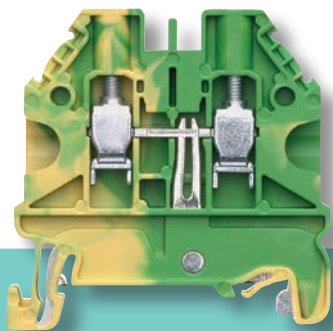


DIN Rail Terminal Blocks with Screw Connection

- Smaller size
- Uniform design
- Fewer accessories

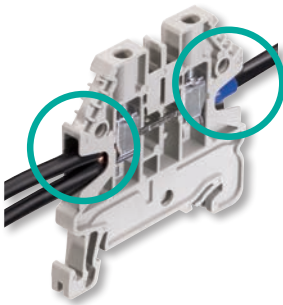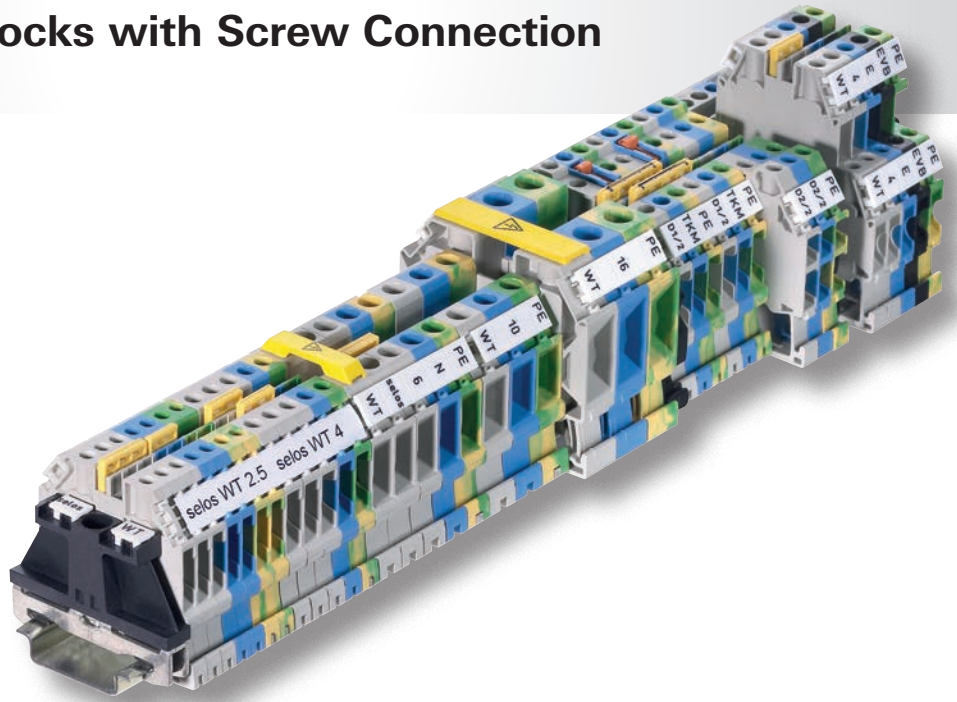


Simply connect

- Multi-wire connection
- Connect with or without ferrules

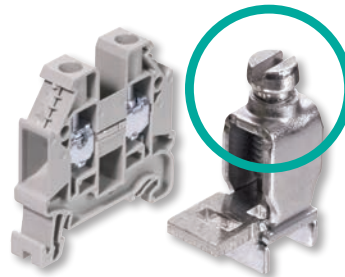


Reliable and maintenance-free

- Rugged clamping body design
- One-piece threaded collar
- Stress-free connecting and reconnecting

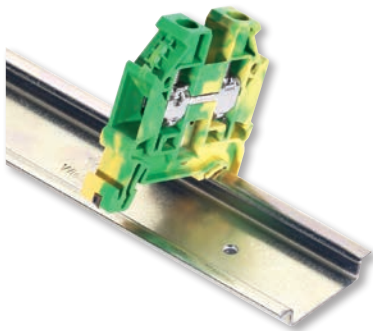

Time-saving assembly


- Snap-on screwless ground blocks

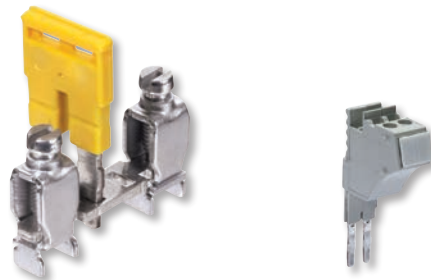

Plug & Play


- Dual jumpering channels
- Plug-in jumper bars
- Plug-in test adapter

Wieland jumpering system – Perfect technology

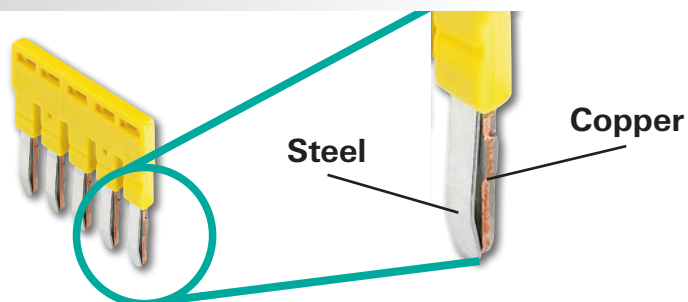


Perfect technology

- Copper current bar guarantees low contact resistance
- Steel spring guarantees strength, durability, and long-term stability

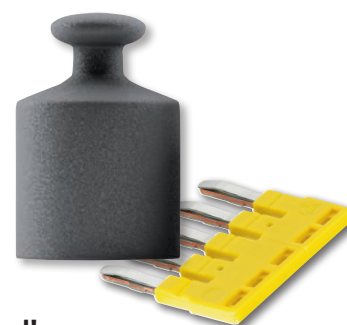

Extremely rugged!


- Indestructible steel spring
- Vibration-proof connection

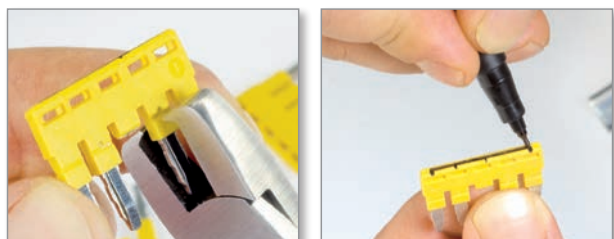

Simple customization

- Individual-poles easy to remove
- Circuits easy to identify

Wieland marking system – Reliable identification

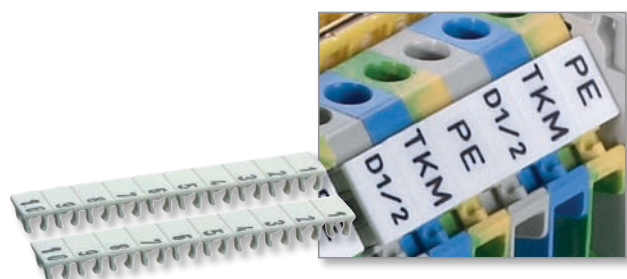


Marking strips – Dependable

- Maximum hold to the terminal
- Solidify integrity of rail assembly



Endless strip – Effective

- Mounting facility for endless strips permits single step marking of entire assembly
- Continuous labeling
- Uses commercially available labeling systems

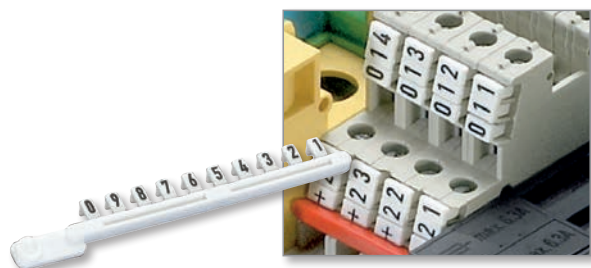


Marking tags – Individual

- Individual labeling with minimum effort
- Ideal for service and maintenance

Feed-through blocks with screw connection

WT 2,5


- Feed-through block with screw connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Max. electrical data: 32 A/4 mm²
- Connection capacity: 2 wires, equal size 0.14 – 1.5 mm²



Description	Type	Part No.	Std. Pack
Feed-through block	gray	WT 2,5	58.503.0055.0 100
Feed-through block	blue	WT 2,5 BL	58.503.0055.6 100
General data			
Width / length / height, incl. TS 7.5	5 mm / 48 mm / 48 mm		
Wire strip length	9 mm IECEx SEV 14.0004 U		
Approvals	ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14–4 mm ²		
Cross section solid/stranded	0.14–4 mm ²		
Cross section, AWG	26–12	26–12	
Rated current	24 A	20 A	24 A
Rated voltage	1000 V	600 V	690 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	Type	Part No.	Std. Pack
	AP WT 2,5-10	07.313.2555.0	10
Cross connector	2-pole	IVB WKF 2,5-2	27.280.6227.0 10
	3-pole	IVB WKF 2,5-3	27.280.6327.0 10
	4-pole	IVB WKF 2,5-4	27.280.6427.0 10
	5-pole	IVB WKF 2,5-5	27.280.6527.0 10
	10-pole	IVB WKF 2,5-10	27.280.7027.0 20
	20-pole	IVB WKF 2,5-20	27.280.8027.0 20

WT 4


- Feed-through block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Max. electrical data: 41 A/6 mm²
- Connection capacity: 2 wires, equal size 0.14 – 2.5 mm²



Description	Type	Part No.	Std. Pack
Feed-through block	gray	WT 4	58.504.0055.0 100
Feed-through block	blue	WT 4 BL	58.504.0055.6 100
General data			
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 48 mm		
Wire strip length	9 mm IECEx SEV 14.0004 U		
Approvals	ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14–6 mm ²		
Cross section solid/stranded	0.14–6 mm ²		
Cross section, AWG	26–10	26–10	
Rated current	32 A	30 A	32 A
Rated voltage	1000 V	600 V	690 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	Type	Part No.	Std. Pack
	AP WT 2,5-10	07.313.2555.0	10
Cross connector	2-pole	IVB WKF 4-2	27.261.1227.0 10
	3-pole	IVB WKF 4-3	27.261.1327.0 10
	4-pole	IVB WKF 4-4	27.261.1427.0 10
	5-pole	IVB WKF 4-5	27.261.1527.0 10
	10-pole	IVB WKF 4-10	27.261.2027.0 20

WT 6


- Feed-through block with screw connection for mounting on TS 35
- Nominal cross section 6 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Max. electrical data: 57 A/10 mm²
- Connection capacity: 2 wires, equal size 0.2 – 4 mm²



Description	Type	Part No.	Std. Pack
Feed-through block	gray	WT 6	58.506.0055.0 100
Feed-through block	blue	WT 6 BL	58.506.0055.6 100
General data			
Width / length / height, incl. TS 7.5	8 mm / 48 mm / 48 mm		
Wire strip length	11 mm IECEx SEV 14.0004 U		
Approvals	ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.2–10 mm ²		
Cross section solid/stranded	0.2–10 mm ²		
Cross section, AWG	24–8	24–8	
Rated current	41 A	50 A	41 A
Rated voltage	1000 V	600 V	550 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	Type	Part No.	Std. Pack
	AP WT 2,5-10	07.313.2555.0	10
Cross connector	2-pole	IVB WKFN 6-2	27.282.5227.0 10
	3-pole	IVB WKFN 6-3	27.282.5327.0 10
	4-pole	IVB WKFN 6-4	27.282.5427.0 10
	5-pole	IVB WKFN 6-5	27.282.5527.0 10

WT 10

- Feed-through block with screw connection for mounting on TS 35
- Nominal cross section 10 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Max. electrical data: 76 A/16 mm²
- Connection capacity: 2 wires, equal size
0.5 – 6 mm²




Description	Type	Part No.	Std. Pack
Feed-through block	gray	WT 10	58.510.0055.0
Feed-through block	blue	WT 10 BL	58.510.0055.6

General data				
Width / length / height, incl. TS 7.5	10 mm / 48 mm / 48 mm			
Wire strip length	13 mm			
Approvals	IEC Ex IECEx SEV 14 ATEX 0124 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.5 – 16 mm ²			
Cross section solid/stranded	0.5 – 16 mm ²			
Cross section, AWG	20–6			
Rated current	57 A	65 A	65 A	57 A
Rated voltage	1000 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories	Type	Part No.	Std. Pack
End plate	AP WT 2,5-10	07.313.2555.0	10
Cross connector	2-pole IVB WKF 10-2	Z7.283.8227.0	10

WT 16

- Feed-through block with screw connection for mounting on TS 35
- Nominal cross section 16 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Max. electrical data: 101 A/25 mm²
- Connection capacity: 2 wires, equal size
2.5 – 10 mm²

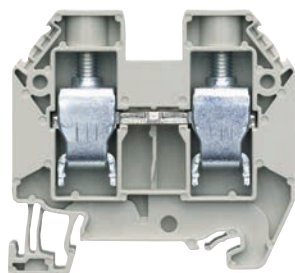


Description	Type	Part No.	Std. Pack
Feed-through block	gray	WT 16	58.516.0055.0
Feed-through block	blue	WT 16 BLAU	58.516.0055.6

General data				
Width / length / height, incl. TS 7.5	12 mm / 58 mm / 54mm			
Wire strip length	15 mm			
Approvals	IEC Ex IECEx SEV 14 ATEX 0124 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	4 – 25 mm ²			
Cross section solid/stranded	1.5 – 25 mm ²			
Cross section, AWG	16–4			
Rated current	76 A	85 A	85 A	76 A
Rated voltage	1000 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories	Type	Part No.	Std. Pack
End plate	AP WT 16	07.313.2755.0	10
Cross connector	2-pole IVB WKF 16-2	Z7.284.4227.0	10

Accessories for *selos* WT 2,5 – WT 16

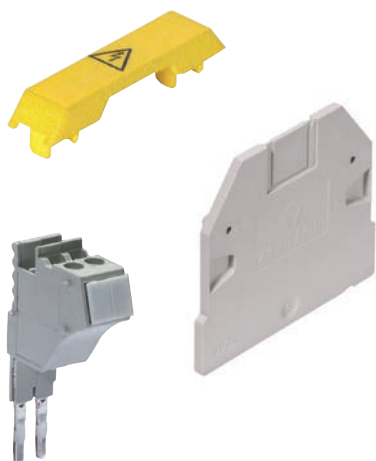


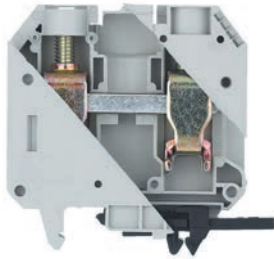
Accessories	Type	Part No.	Std. Pack
Cover with warning symbol	for WT 2,5	AD WT 2,5	04.344.1455.8
	for WT 4	AD WT 4	04.344.1655.8
	for WT 6	AD WT 6/10	04.344.1855.8
	for WT 10	AD WT 6/10	04.344.1855.8
	for WT 16	AD WT 16	04.344.2255.8
	Partition for WT 2,5 – WT 10	TW WT 2,5-10	07.313.2655.0
Partition for WT 16	TW WT 4E	07.313.2855.0	
Test adapter modular for WT 2,5 and 4	PS WKC/F	Z1.299.9753.0	
End plate for test adapter *	ZP/AP PS	07.312.6053.0	


* for WT4 an end cover plate must be snapped in after each test connector

Feed-through blocks with screw connection

WKN 35/U


- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 35 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170
- Enclosed design





Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKN 35/U	57.535.0155.0	20
Feed-through block Exi	blue	WKN 35/U BLAU	57.535.0155.6	20
General data				
Width / length / height, incl. TS 7.5	16 mm / 71 mm / 68 mm			
Wire strip length	18 mm			
Approvals	 IECEx SEV 15.0002 U SEV 15 ATEX 0108 U			
Technical data				
	IEC	UL	CSA	Ex
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	10–35 mm ²	10–1/0 AWG	10–1/0 AWG	10–35 mm ²
Cross section solid/stranded	10–50 mm ²			10–50 mm ²
Rated current	125 A	150 A	150 A	125 A
Rated voltage	800 V ^{*)}	600 V	600 V	690 V ¹⁾
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
Partition	gray	TWN 35	07.311.7855.0	10
Cross connector with screws, insulated	2-pole	IVB WKN 35 - 2	Z7.285.2227.0	5
	3-pole	IVB WKN 35 - 3	Z7.285.2327.0	5
	up to 6-pole	IVB WKN 35 - 6	Z7.285.2627.0	5
	up to 12-pole	IVB WKN 35 - 12	Z7.285.3227.0	5
Single cover with marking facility		AD VB 35 GELB	04.326.2553.8	10
Cover with warning symbol over 4 blocks		AD VB 16/4 GELB	04.343.5256.8	10

^{*)} higher voltage upon request

WKN 70/U


- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 70 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170
- Enclosed design

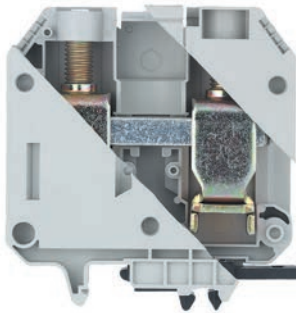



Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKN 70/U	57.570.0155.0	20
Feed-through block Exi	blue	WKN 70/U BLAU	57.570.0155.6	20
General data				
Width / length / height, incl. TS 7.5	24 mm / 77 mm / 81 mm			
Wire strip length	24 mm			
Approvals	 IECEx SEV 15.0002 U SEV 15 ATEX 0108 U			
Technical data				
	IEC	UL	CSA	Ex
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	10–70 mm ²	6–2/0 AWG	6–2/0 AWG	10–70 mm ²
Cross section solid/stranded	16–95 mm ²			16–95 mm ²
Rated current	192 A	175/175 A	170 A	192 A
Rated voltage	800 V ^{*)}	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
Partition	gray	TWN 70	07.311.7955.0	10
Cross connector with screws, insulated	2-pole	VB WKN 70 - 2	Z7.286.3227.0	10
	3-pole	VB WKN 70 - 3	Z7.286.3327.0	10
	up to 6-pole	VB WKN 70 - 6	Z7.286.3627.0	10
Single cover with marking facility		AD VB 70 GELB	04.326.2653.8	10
Cover with warning symbol over 4 blocks		AD VB 24/4 GELB	04.343.5356.8	10

^{*)} higher voltage upon request


WKN 150/U

- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 150 mm²
- Ex e I/II  II GD IM2
Follow the EX installation instructions on page 170
- Enclosed design

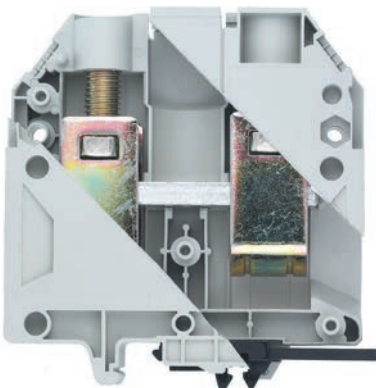

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKN 150/U	57.597.0155.0	10
Feed-through block Exi	blue	WKN 150/U BLAU	57.597.0155.6	10
General data				
Width / length / height, incl. TS 7.5	28 mm / 96 mm / 99 mm			
Wire strip length	30 mm			
Approvals	 IECEx SEV 15.0002 U SEV 15 ATEX 0108 U			
Technical data				
	IEC	UL	CSA	Ex
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	35–150 mm ²	2/0 AWG-350 kcmil	2/0 AWG-350 kcmil	35–150 mm ²
Cross section solid/stranded	35–185 mm ²			35–185 mm ²
Rated current	309 A	335/335 A	365 A	309 A
Rated voltage	1000 V	600 V	1000 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
Partition	gray	TWN 150	07.311.8155.0	10
Cross connector with screws, insulated	2-pole	VB WKN 150 - 2	Z7.287.1227.0	5
	3-pole	VB WKN 150 - 3	Z7.287.1327.0	5
	up to 6-pole	VB WKN 150 - 6	Z7.287.1627.0	5
Cover with warning symbol over 4 blocks		AD VB 28/4 GELB	04.343.5456.8	10

Supply set

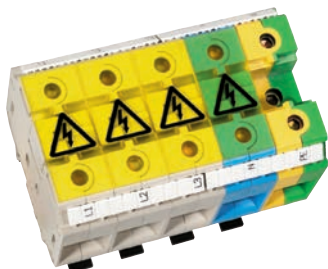



Description	Type	Part No.	Std. Pack
Supply set	WKN 70 3D/N/SL/U	57.570.9855.0	1
Supply set	WKN 70 3D/2N/SL/U	57.570.9955.0	1
Supply set	WKN 150/70 3D/N/SL/U	57.597.9855.0	1
Supply set	WKN 150/3D/N/U	57.597.9955.0	1



¹⁾ For maintaining the proper isolation distances, the open side of a feed-through terminal block as well as both sides of a jumper are to be enclosed by partitions

Ground blocks with screw connection


WT 2,5 PE


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 2.5 mm²
-  II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
0.14 – 1.5 mm²





Description	Type	Part No.	Std. Pack
Ground block green/yellow	WT 2,5 PE	58.503.9055.0	100
General data			
Width / length / height, incl. TS 7.5	5 mm / 48 mm / 48 mm		
Wire strip length	9 mm IECEx SEV 14.0004 U		
Approvals	 ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
			
	EN 60 947-7-2		
Cross section fine-stranded	0.14–4 mm ²		0.14–4 mm ²
Cross section solid/stranded	0.14–4 mm ²		0.14–4 mm ²
Cross section, AWG	26–12		26–12
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
	Type	Part No.	Std. Pack
End plate	AP WT 2,5 - 10	07.313.2555.0	10


WT 4 PE


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
-  II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
0.14 – 2.5 mm²





Description	Type	Part No.	Std. Pack
Ground block green/yellow	WT 4 PE	58.504.9055.0	100
General data			
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 48 mm		
Wire strip length	9 mm IECEx SEV 14.0004 U		
Approvals	 ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
			
	EN 60 947-7-2		
Cross section fine-stranded	0.14–6 mm ²		0.14–6 mm ²
Cross section solid/stranded	0.14–6 mm ²		0.14–6 mm ²
Cross section, AWG	26–10		26–10
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
	Type	Part No.	Std. Pack
End plate	AP WT 2,5 - 10	07.313.2555.0	10

WT 6 PE


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 6 mm²
-  II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
0.2 – 4 mm²



Description	Type	Part No.	Std. Pack
Ground block green/yellow	WT 6 PE	58.506.9055.0	100
General data			
Width / length / height, incl. TS 7.5	8 mm / 48 mm / 48 mm		
Wire strip length	11 mm IECEx SEV 14.0004 U		
Approvals	 ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
			
	EN 60 947-7-2		
Cross section fine-stranded	0.2–10 mm ²		0.2–10 mm ²
Cross section solid/stranded	0.2–10 mm ²		0.2–10 mm ²
Cross section, AWG	24–8		24–8
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
	Type	Part No.	Std. Pack
End plate	AP WT 2,5 - 10	07.313.2555.0	10

WT 10 PE


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 10 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
0.5 – 6 mm²



Description	Type	Part No.	Std. Pack
Ground block green/yellow	WT 10 PE	58.510.9055.0	50
General data			
Width / length / height, incl. TS 7.5	10 mm / 48 mm / 48 mm		
Wire strip length	13 mm IECEx SEV 14.0004 U		
Approvals	ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	0.5 – 16 mm ²		0.5 – 16 mm ²
Cross section solid/stranded	0.5 – 16 mm ²		0.5 – 16 mm ²
Cross section, AWG	20–6		20–6
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	AP WT 2,5 - 10	07.313.2555.0	10

WT 16 PE


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 16 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
2.5 – 10 mm²

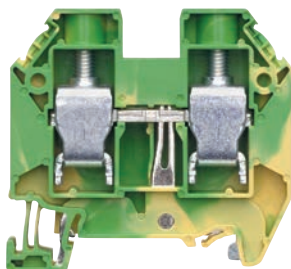



Description	Type	Part No.	Std. Pack
Ground block green/yellow	WT 16 PE	58.516.9055.0	100
General data			
Width / length / height, incl. TS 7.5	12 mm / 58 mm / 54 mm		
Wire strip length	15 mm IECEx SEV 14.0004 U		
Approvals	ATEX IECEx SEV 14 ATEX 0124 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	4 – 25 mm ²		4 – 25 mm ²
Cross section solid/stranded	1.5 – 25 mm ²		1.5 – 25 mm ²
Cross section, AWG	16–4		14–4
Rated current			
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	AP WT 16	07.313.2755.0	10

Ground blocks with screw connection


WKN 35 SL


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 35 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170
- Enclosed design

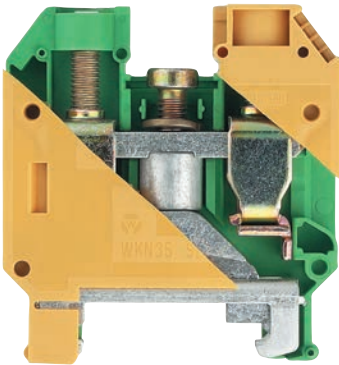


Description	Type	Part No.	Std. Pack
Ground block green/yellow	WKN 35 SL	57.535.9055.0	20
General data			
Width / length / height, incl. TS 7.5	16 mm / 63 mm / 68 mm		
Wire strip length	20 mm IEC Ex SEV 15.0002 U		
Approvals	 IEC Ex SEV 15 ATEX 0108 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	10–35 mm ²		
Cross section solid/stranded	10–50 mm ²		
Cross section, AWG		10–2	10–2
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

WKN 70 SL


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 70 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170
- Enclosed design

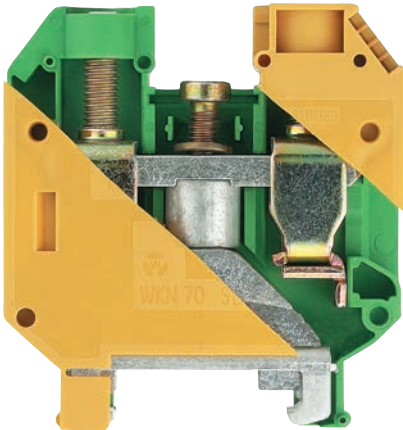


Description	Type	Part No.	Std. Pack
Ground block green/yellow	WKN 70 SL	57.570.9055.0	20
General data			
Width / length / height, incl. TS 7.5	24 mm / 75 mm / 81 mm		
Wire strip length	24 mm IEC Ex SEV 15.0002 U		
Approvals	 IEC Ex SEV 15 ATEX 0108 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	10–70 mm ²		
Cross section solid/stranded	16–95 mm ²		
Cross section, AWG		6–2/0	6–2/0
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

9700 A/35 E S 35


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 35 mm²




Description	Type	Part No.	Std. Pack
Ground block green/yellow	9700 A/35 E S 35	Z2.302.0621.0	25
General data			
Width / length / height, incl. TS 7.5	17 mm / 56 mm / 35 mm		
Wire strip length			
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	35 mm ²		
Cross section solid/stranded	50 mm ²		
Cross section, AWG	8-2		
Rated current			
Rated voltage	600 V		
Rated impulse voltage			
Pollution degree			

9700 A/70 E S 35


- Ground block with screw connection for mounting on TS 35
- Nominal cross section 70 mm²

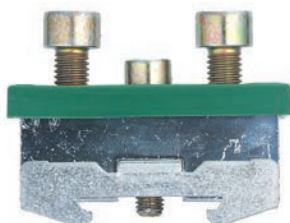


Description	Type	Part No.	Std. Pack
Ground block green/yellow	9700 A/70 E S 35	Z2.302.0421.0	10
General data			
Width / length / height, incl. TS 7.5	25 mm / 57 mm / 57 mm		
Wire strip length			
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	70 mm ²		
Cross section solid/stranded	120 mm ²		
Cross section, AWG	6-2/0		6-2/0
Rated current			
Rated voltage	600 V		
Rated impulse voltage			
Pollution degree			



Duo feed-through and duo-ground blocks with screw connection

WT 4 D1/2 | WT 4 D1/2 PE

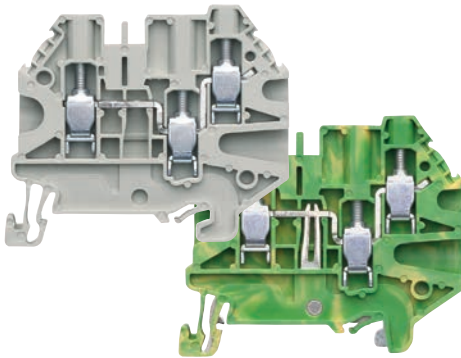- Duo feed-through block / duo-ground block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
-  II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Max. electrical data: 41 A/6 mm²
- Connection capacity: 2 wires, equal size
0.14 – 2.5 mm²




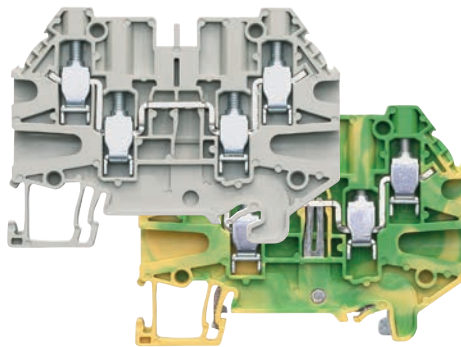
Description	Type	Part No.	Std. Pack
Duo feed-through block	gray	WT 4 D1/2	58.504.5055.0 100
Duo feed-through block	blue	WT 4 D1/2 BL	58.504.5055.6 100
Duo-ground block	green/yellow	WT 4 D1/2 PE	58.504.9355.0 100

General data				
Width / length / height, incl. TS 7.5	6 mm / 56 mm / 50 mm			
Wire strip length	9 mm IEC Ex SEV 14.0004 U			
Approvals	 ATEX IECEx SEV 14 ATEX 0124 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.14 – 6 mm ²			0.14 – 6 mm ²
Cross section solid/stranded	0.14 – 6 mm ²			0.14 – 6 mm ²
Cross section, AWG		26 – 10	26 – 10	
Rated current	32 A	30 A	30 A	32 A
Rated voltage	500 V	300 V	300 V	550 V
Rated impulse voltage	6 kV			
Pollution degree	3			



Accessories				
Accessories	Type	Part No.	Std. Pack	
End plate	AP WT 4 D1/2	07.313.2955.0	10	
Partition	TW WT 4 E	07.313.2855.0	10	
Cross connector	2-pole	IVB WKF 4-2	Z7.261.1227.0	10
	3-pole	IVB WKF 4-3	Z7.261.1327.0	10
	4-pole	IVB WKF 4-4	Z7.261.1427.0	10
	5-pole	IVB WKF 4-5	Z7.261.1527.0	10
	10-pole	IVB WKF 4-10	Z7.261.2027.0	10

WT 4 D2/2 | WT 4 D2/2 PE

- Duo feed-through block / duo-ground block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
-  II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Max. electrical data: 41 A/6 mm²
- Connection capacity: 2 wires, equal size
0.14 – 2.5 mm²



Description	Type	Part No.	Std. Pack
Duo feed-through block	gray	WT 4 D2/2	58.504.5155.0 100
Duo feed-through block	blue	WT 4 D2/2 BLAU	58.504.5155.6 100
Duo-ground block	green/yellow	WT 4 D2/2 PE	58.504.9155.0 100


General data				
Width / length / height, incl. TS 7.5	6 mm / 68 mm / 50 mm			
Wire strip length	9 mm IEC Ex SEV 14.0004 U			
Approvals	 ATEX IECEx SEV 14 ATEX 0124 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.14 – 6 mm ²			0.14 – 6 mm ²
Cross section solid/stranded	0.14 – 6 mm ²			0.14 – 6 mm ²
Cross section, AWG		26 – 10	26 – 10	
Rated current	32 A	30 A	30 A	32 A
Rated voltage	500 V	300 V	300 V	440 V
Rated impulse voltage	6 kV			
Pollution degree	3			

Accessories				
Accessories	Type	Part No.	Std. Pack	
End plate	AP WT 4 D2/2	07.313.3155.0	10	
Partition	TW WT 4 E	07.313.2855.0	10	
Cross connector	2-pole	IVB WKF 4-2	Z7.261.1227.0	10
	3-pole	IVB WKF 4-3	Z7.261.1327.0	10
	4-pole	IVB WKF 4-4	Z7.261.1427.0	10
	5-pole	IVB WKF 4-5	Z7.261.1527.0	10
	10-pole	IVB WKF 4-10	Z7.261.2027.0	10

Knife edge disconnect and fuse blocks with screw connection

WT 2,5 TKM...


- Knife edge disconnect block for mounting on TS 35
- Nominal cross section 2,5 mm²
- Connection capacity: 2 wires, equal size 0,14 – 1,5 mm²

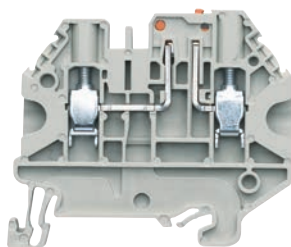

Description	Type	Part No.	Std. Pack	
Knife edge disconnect block	gray	WT 2,5 TKM	58.503.2055.0	100
Knife edge disconnect block with 2 test bolts	blue	WT 2,5 TKM BL	58.503.2055.6	100
Feed-through block, identically-shaped	gray	WT 2,5 TKM P	58.503.2355.0	100
Feed-through block, identically-shaped	blue	WT 2,5 TKM D BL	58.503.2155.0	100
Feed-through block, identically-shaped	blue	WT 2,5 TKM D BL	58.503.2155.6	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 56 mm / 50 mm			
Wire strip length	9 mm			
Approvals				
Technical data				
	IEC	UL	CSA	
Cross section fine-stranded	0.14–4 mm ²	pending	pending	
Cross section solid/stranded	0.14–4 mm ²			
Cross section, AWG				
Rated current	20 A			
Rated voltage	500 V			
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
	Type	Part No.	Std. Pack	
End plate	AP WT 4 D1/2	07.313.2955.0	10	
Partition	TW WT 4 E	07.313.2855.0	10	
Cross connector	2-pole	IVB WKF 2,5-2	Z7.280.6227.0	10
	5-pole	IVB WKF 2,5-5	Z7.280.6527.0	10
	10-pole	IVB WKF 2,5-10	Z7.280.7027.0	10
	20-pole	IVB WKF 2,5-20	Z7.280.8027.0	10

WT 4 TKM...

- Knife edge disconnect block for mounting on TS 35
- Nominal cross section 4 mm²
- Connection capacity: 2 wires, equal size 0,14 – 2,5 mm²

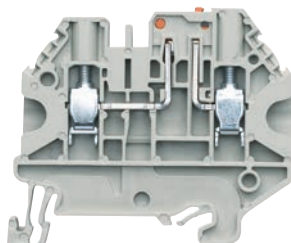


Description	Type	Part No.	Std. Pack	
Knife edge disconnect block	gray	WT 4 TKM	58.504.2055.0	100
Knife edge disconnect block with 2 test bolts	blue	WT 4 TKM BL	58.504.2055.6	100
	gray	WT 4 TKM P	58.504.2355.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 56 mm / 50 mm			
Wire strip length	9 mm			
Approvals				
Technical data				
	IEC	UL	CSA	
Cross section fine-stranded	0.14–6 mm ²			
Cross section solid/stranded	0.14–6 mm ²			
Cross section, AWG		26–10	26–10	
Rated current	24 A	16 A	16 A	
Rated voltage	500 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
	Type	Part No.	Std. Pack	
End plate	AP WT 4 D1/2	07.313.2955.0	10	
Partition	TW WT 4 E	07.313.2855.0	10	
Cross connector	2-pole	IVB WKF 4-2	Z7.261.1227.0	10
	5-pole	IVB WKF 4-5	Z7.261.1527.0	10
	10-pole	IVB WKF 4-10	Z7.261.2027.0	10

WT 4 FSI

- Fuse block for automobile fuses (mini) for mounting on TS 35
- Nominal cross section 4 mm²
- Connection capacity: 2 wires, equal size 0,14 – 2,5 mm²

¹⁾ Observe the derating curve, available in our e-catalog at <https://eshop.wieland-electric.com>


²⁾ determined by the fuse inserted

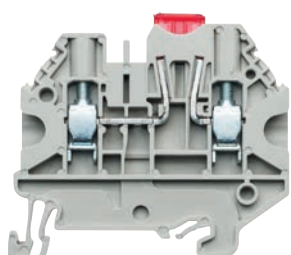




Description	Type	Part No.	Std. Pack	
Fuse block	gray	WT 4 FSI	58.504.4155.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 56 mm / 50 mm			
Wire strip length	9 mm			
Approvals				
Technical data				
	IEC	UL	CSA	
Cross section fine-stranded	0.14–6 mm ²	pending	pending	
Cross section solid/stranded	0.14–6 mm ²			
Cross section, AWG				
Rated current	max. 20 A ¹⁾			
Rated voltage	²⁾			
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
	Type	Part No.	Std. Pack	
End plate	AP WT 4 D1/2	07.313.2955.0	10	
Partition	TW WT 4 E	07.313.2855.0	10	
Cross connector	2-pole	IVB WKF 4-2	Z7.261.1227.0	10
	5-pole	IVB WKF 4-5	Z7.261.1527.0	10
	10-pole	IVB WKF 4-10	Z7.261.2027.0	10

Multi-tier blocks with screw connection


WKN 2,5 E/U

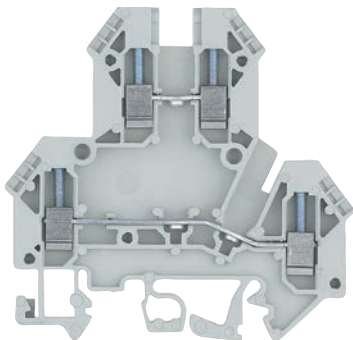
- Multi-tier block for mounting on TS 35 and TS 32
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170
- Class I, Zone 1, AEx, e, II, T6





Description	Type	Part No.	Std. Pack
Multi-tier block	gray WKN 2,5 E/U	57.403.7055.0	100
General data			
Width / length / height, incl. TS 7.5	5 mm / 66 mm / 64 mm		
Wire strip length	8 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14–2.5 mm ²		
Cross section solid/stranded	0.2–4 mm ²		
Cross section, AWG		22–12	24–12
Rated current	24 A	20 A	25 A
Rated voltage	500 V	600 V	600 V
Rated impulse voltage	6 A		
Pollution degree	3		


WKN 2,5 E/U/VB

- Multi-tier block, vertically jumpered, with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170
- Class I, Zone 1, AEx, e, II, T6

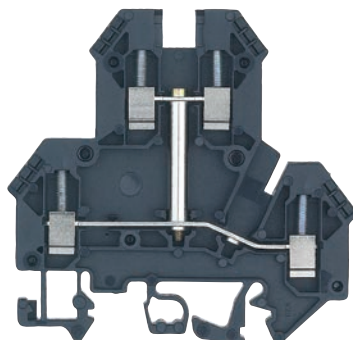

Description	Type	Part No.	Std. Pack
Multi-tier block	black WKN 2,5 E/U/VB	57.403.6955.1	100
General data			
Width / length / height, incl. TS 7.5	5 mm / 66 mm / 64 mm		
Wire strip length	8 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14–2.5 mm ²		
Cross section solid/stranded	0.2–4 mm ²		
Cross section, AWG		22–12	24–12
Rated current	24 A	20 A	25 A
Rated voltage	500 V	600 V	600 V
Rated impulse voltage	6 A		
Pollution degree	3		


Accessories for *selos* WKN 2,5 E/U...

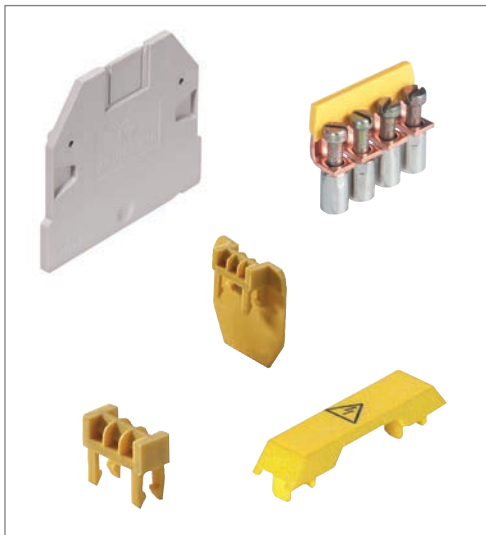

Accessories	Type	Part No.	Std. Pack
End plate	gray APN 2,5 E	07.312.1755.0	10
Partition	gray TWN 2,5 E	07.312.1855.0	10
Cross connector with screws, insulated	2-pole IVB WK 2,5 - 2	Z7.280.2227.0	10
	3-pole IVB WK 2,5 - 3	Z7.280.2327.0	10
	up to 12-pole IVB WK 2,5 - 12	Z7.280.3227.0	10
Partition plate with marking facility	yellow TS 2,5 GELB	07.311.2053.8	10
Single cover with marking facility	yellow AD VB 2,5 GELB	04.326.2053.8	10
Cover with warning symbol over 4 blocks		04.343.4756.8	10

WT 4 E

- Multi-tier block for mounting on TS 35
- Nominal cross section 4 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
0.14 – 2.5 mm²

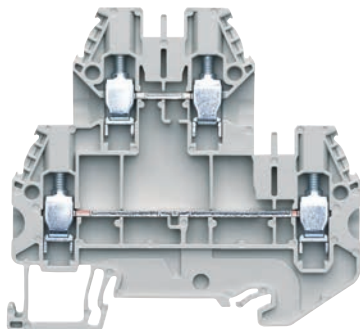


Description	Type	Part No.	Std. Pack
Multi-tier block	gray	WT 4 E	58.504.7055.0
Multi-tier block	blue	WT 4 E BL	58.504.7055.6

General data				
Width / length / height, incl. TS 7.5	6 mm / 72 mm / 67 mm			
Wire strip length	9 mm			
Approvals	IECEx SEV 14.0004 U SEV 14 ATEX 0124 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.14 – 6 mm ²			
Cross section solid/stranded	0.14 – 6 mm ²			
Cross section, AWG	26 – 10		26 – 10	
Rated current	32 A	30 A	30 A	32 A
Rated voltage	800 V	300 V	300 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories				
Accessories	Type	Part No.	Std. Pack	
End plate	AP WT 4 E	07.313.3355.0	10	
Partition	TW WT 4 E	07.313.2855.0	10	
Cross connector	2-pole	IVB WKF 4-2	Z7.261.1227.0	
	3-pole	IVB WKF 4-3	Z7.261.1327.0	
	4-pole	IVB WKF 4-4	Z7.261.1427.0	
	5-pole	IVB WKF 4-5	Z7.261.1527.0	
	10-pole	IVB WKF 4-10	Z7.261.2027.0	

WT 4 E VB

- Multi-tier block, vertically jumpered, with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
0.14 – 2.5 mm²

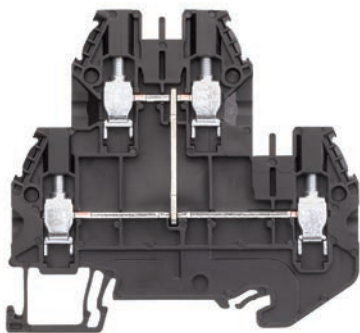


Description	Type	Part No.	Std. Pack
Multi-tier block	black	WT 4 E VB	58.504.6955.1

General data				
Width / length / height, incl. TS 7.5	6 mm / 72 mm / 67 mm			
Wire strip length	9 mm			
Approvals	IECEx SEV 14.0004 U SEV 14 ATEX 0124 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.14 – 6 mm ²			
Cross section solid/stranded	0.14 – 6 mm ²			
Cross section, AWG	26 – 10		26 – 10	
Rated current	32 A	30 A	30 A	32 A
Rated voltage	800 V	300 V	300 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories				
Accessories	Type	Part No.	Std. Pack	
End plate	AP WT 4 E	07.313.3355.0	10	
Partition	TW WT 4 E	07.313.2855.0	10	
Cross connector	2-pole	IVB WKF 4-2	Z7.261.1227.0	
	3-pole	IVB WKF 4-3	Z7.261.1327.0	
	4-pole	IVB WKF 4-4	Z7.261.1427.0	
	5-pole	IVB WKF 4-5	Z7.261.1527.0	
	10-pole	IVB WKF 4-10	Z7.261.2027.0	

WT 4 E PE

- Multi-tier ground block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- II 2G 2D Ex eb IIC
EN 60079-0:12+A11:13 / IEC 60079-0:2011 Ed:6.0
EN 60079-7:07 / IEC 60079-7:2006-07 Ed:4
Follow the EX installation instructions on page 170
- Connection capacity: 2 wires, equal size
0.14 – 2.5 mm²

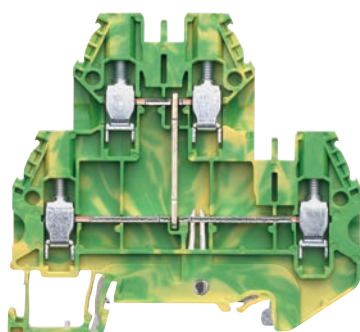

Description	Type	Part No.	Std. Pack
Multi-tier ground block	green/yellow	WT 4 E PE	58.504.9255.0


General data				
Width / length / height, incl. TS 7.5	6 mm / 72 mm / 67 mm			
Wire strip length	9 mm			
Approvals	IECEx SEV 14.0004 U SEV 14 ATEX 0124 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			
Cross section fine-stranded	0.14 – 6 mm ²			
Cross section solid/stranded	0.14 – 6 mm ²			
Cross section, AWG	26 – 10			
Rated current				
Rated voltage	800 V		300 V	
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories				
Accessories	Type	Part No.	Std. Pack	
End plate	AP WT 4 E	07.313.3355.0	10	

Specialty function blocks with screw connection

WT 4 E...

- Function block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- Connection capacity: 2 wires, equal size 0.14 – 2.5 mm²

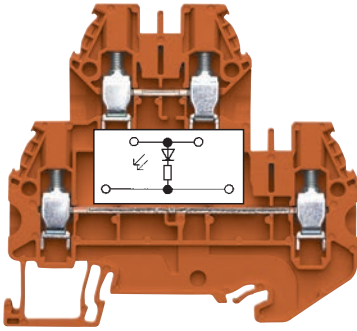


Description	Type	Part No.	Std. Pack
Function block	orange	WT 4 E...	58.504.XX55.9
General data			
Width / length / height, incl. TS 7.5	6 mm / 72 mm / 67 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1/-2		
Cross section fine-stranded	0.14–6 mm ²		
Cross section solid/stranded	0.14–6 mm ²		
Cross section, AWG	26–10		
Rated current	26–10		
Rated voltage			
Rated impulse voltage			
Pollution degree			
Accessories			
End plate	gray	AP WT 4 E	07.313.3355.0
			10

Examples of functions

The multi-tier block is available on request as a function block for a wide variety of switching tasks.


58.504.8355.9



58.504.8055.9
with inverted diode


400 V
1 A/1000 V

58.504.7455.9 LED red



24 V DC
R = 4,7 K
0,4 W


58.504.8255.9



58.504.8155.9
with inverted diode

400 V
1 A/1000 V


58.504.7955.9



58.504.8855.9
with inverted diodes

1 A/400 V


58.504.7255.9 LED red



24 V DC
R = 4,7 K
0,4 W

58.504.8755.9 LED green

58.504.7355.9




U = 100-500 V

Three-tier-/Initiator blocks with screw connection



WK 2,5-3 D/U

- Multi-tier block for mounting on TS 35 and TS 32
- Nominal cross section 2.5 mm²

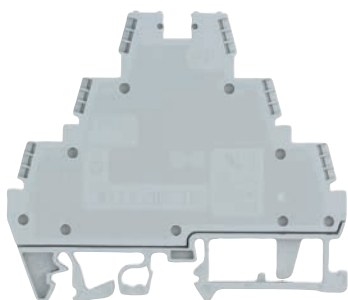

WK 2,5 - 3 D/U-NGN


WK 2,5 - 3 D/U-PGN



Description	Type	Part No.	Std. Pack	
Multi-tier block	gray	WK 2,5 - 3 D/U	57.503.8855.0	50
Multi-tier bl., LED (green) betw. signal and +		WK 2,5 - 3 D/U-NGN	57.503.8955.0	50
Multi-tier bl., LED (green) betw. signal and -		WK 2,5 - 3 D/U-PGN	57.503.9055.0	50
General data				
Width / length / height, incl. TS 7.5	6 mm / 79 mm / 69 mm			
Wire strip length	7 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.5–2.5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG		22–12	22–12	
Rated current	24 A	25 A	25 A	
Rated voltage	400 V*	300 V*	300 V*	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
Partition	gray	TW 2,5 - 3 D/U	07.312.1255.0	50



WK 2,5-3 D/SL

- Multi-tier block for mounting on TS 35
- Nominal cross section 2,5 mm²

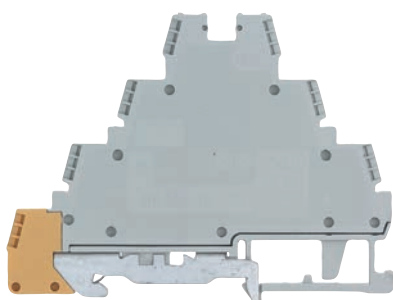

WK 2,5 - 3 D SL-NGN

WK 2,5 - 3 D SL-PGN




Description	Type	Part No.	Std. Pack	
Multi-tier block	gray	WK 2,5 - 3 D SL	56.503.8355.0	50
Multi-tier bl., LED (green) betw. signal and +		WK 2,5 - 3 D SL-NGN	56.503.8455.0	50
Multi-tier bl., LED (green) betw. signal and -		WK 2,5 - 3 D SL-PGN	56.503.8555.0	50
General data				
Width / length / height, incl. TS 7.5	6 mm / 79 mm / 69 mm			
Wire strip length	7 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.5–2.5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG		22–12	22–12	
Rated current	24 A	25 A	25 A	
Rated voltage	400 V*	300 V*	300 V*	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
Partition	gray	TW 2,5 - 3 D/U	07.312.1255.0	50

Accessories for selos WK 2,5-3 D/...

- The use of cross connectors (jumper combs), requires partitions in order to maintain the air and creepage distances.

* 24 V- with LED

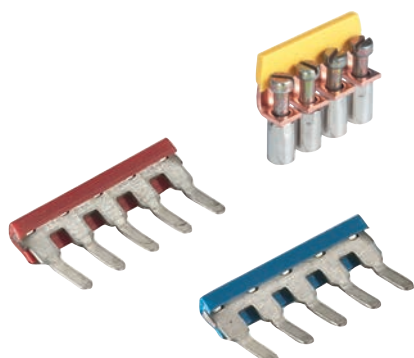


Accessories	Type	Part No.	Std. Pack	
Cross connector with screws, insulated, for upper level	2-pole	IVB WK/3D-02	Z7.270.0227.0	10
	3-pole	IVB WK/3D-03	Z7.270.0327.0	10
	up to 12-pole	IVB WK/3D-12	Z7.270.1227.0	10
Jumper comb, angled, insulated (red), for lower level	2-pole	IVB WK 2,5-K-2 ROT	Z7.267.0227.5	10
	3-pole	IVB WK 2,5-K-3 ROT	Z7.267.0327.5	10
	up to 12-pole	IVB WK 2,5-K-12 ROT	Z7.267.1227.5	10
Jumper comb, angled, insulated (blue), for lower level	2-pole	IVB WK 2,5-K-2 BLAU	Z7.267.0227.6	10
	3-pole	IVB WK 2,5-K-3 BLAU	Z7.267.0327.6	10
	up to 12-pole	IVB WK 2,5-K-12 BLAU	Z7.267.1227.6	10


Initiator blocks with screw connection

WK 2,5-4 KI/U


- Initiator block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2.5 mm²

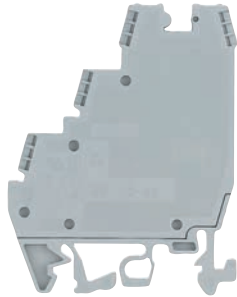

WK 2,5 - 4 KI/U-NGN




WK 2,5 - 4 KI/U-PGN




Description	Type	Part No.	Std. Pack	
Initiator block	gray	WK 2,5 - 4 KI/U	57.503.7855.0	100
Multi-tier bl., LED (green) betw. signal and +		WK 2,5 - 4 KI/U-NGN	57.503.7955.0	100
Multi-tier bl., LED (green) betw. signal and -		WK 2,5 - 4 KI/U-PGN	57.503.8055.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 53 mm / 69 mm			
Wire strip length	7 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
	DIN VDE 0611 T1			
Cross section fine-stranded	0.5–2.5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG				
Rated current	24 A	22–12	22–12	
Rated voltage	250 V*	25 A	25 A	
Rated impulse voltage	4 kV	300 V*	300 V*	
Pollution degree	3			
Accessories				
Partition	gray	TW 2,5 - 4 K/U	07.312.0555.0	10

WK 2,5-4 KI/SL


- Initiator block with screw connection for mounting on TS 35
- Nominal cross section 2.5 mm²

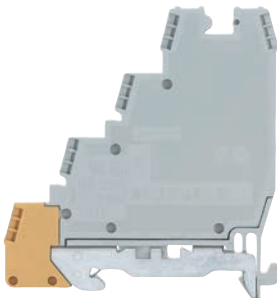

WK 2,5 - 4 KI SL-NGN



WK 2,5 - 4 KI SL-PGN
WK 2,5 - 4 KI SL-PRT




Description	Type	Part No.	Std. Pack	
Initiator block	gray	WK 2,5 - 4 KI SL	56.503.7355.0	100
Multi-tier bl., LED (green) betw. signal and +		WK 2,5 - 4 KI SL-NGN	56.503.7455.0	100
Multi-tier bl., LED (green) betw. signal and -		WK 2,5 - 4 KI SL-PGN	56.503.7555.0	100
Multi-tier bl., LED (red) betw. signal and -		WK 2,5 - 4 KI SL-PRT	56.503.7655.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 64 mm / 69 mm			
Wire strip length	7 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
	DIN VDE 0611 T1			
Cross section fine-stranded	0.5–2.5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG				
Rated current	24 A	22–12	22–12	
Rated voltage	250 V*	25 A	25 A	
Rated impulse voltage	4 kV	300 V*	300 V*	
Pollution degree	3			
Accessories				
Partition	gray	TW 2,5 - 4 K/U	07.312.0555.0	10

Accessories for selos WK 2,5-4 KI/...

- The use of cross connectors (jumper combs), requires partitions in order to maintain the air and creepage distances.


* 24 V- with LED

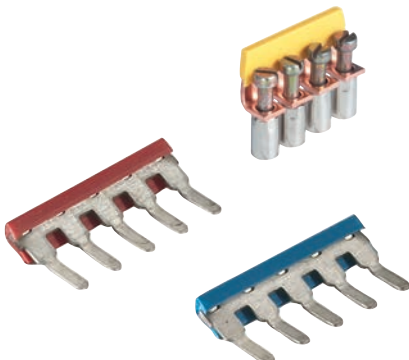

Accessories	Type	Part No.	Std. Pack	
Cross connector with screws, insulated, for upper level	2-pole	IVB WK/3D-02	Z7.270.0227.0	10
	3-pole	IVB WK/3D-03	Z7.270.0327.0	10
	up to 12-pole	IVB WK/3D-12	Z7.270.1227.0	10
Jumper comb, angled, insulated (red), for lower level	2-pole	IVB WK 2,5-K-2 ROT	Z7.267.0227.5	10
	3-pole	IVB WK 2,5-K-3 ROT	Z7.267.0327.5	10
	up to 12-pole	IVB WK 2,5-K-12 ROT	Z7.267.1227.5	10
Jumper comb, angled, insulated (blue), for lower level	2-pole	IVB WK 2,5-K-2 BLAU	Z7.267.0227.6	10
	3-pole	IVB WK 2,5-K-3 BLAU	Z7.267.0327.6	10
	up to 12-pole	IVB WK 2,5-K-12 BLAU	Z7.267.1227.6	10

WK 2,5-4 KOI/U


- Initiator block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2.5 mm²

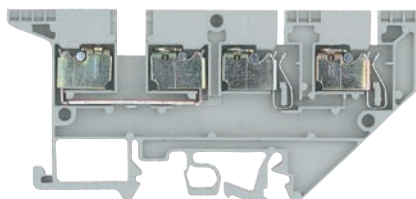

Description	Type	Part No.	Std. Pack	
Initiator block	gray	WK 2,5-4 KOI/U	57.503.7055.0	50
General data				
Width / length / height, incl. TS 7.5	5 mm / 92 mm / 45 mm			
Wire strip length	10 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.5–2.5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG		22–12	22–12	
Rated current, feed-through	16 A	20/30 A	25 A	
Rated voltage	400 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
Cross connector with screws, 2-pole	VB WK 2,5-2	27.280.0227.0	10	
for signal feed through 3-pole	VB WK 2,5-3	27.280.0327.0	10	
up to 6-pole	VB WK 2,5-6	27.280.0627.0	10	

WK 2,5-4 KOI/U-NGN WK 2,5-4 KOI/U-PGN

- Initiator block with screw connection for mounting on TS 35 and TS 32
- **NGN:** With LED (green) between signal and plus
- **PGN:** With LED (green) between signal and minus
- Nominal cross section 2.5 mm²

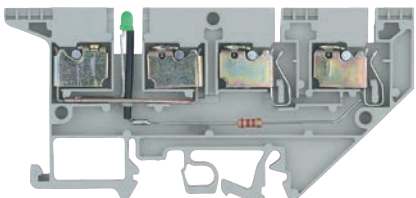

Description	Type	Part No.	Std. Pack	
Initiator block	gray	WK 2,5-4 KOI/U-NGN	57.503.7155.0	50
Initiator block	gray	WK 2,5-4 KOI/U-PGN	57.503.7255.0	50
General data				
Width / length / height, incl. TS 7.5	5 mm / 92 mm / 45 mm			
Wire strip length	10 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.5–2.5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG		22–12	22–12	
Rated current, feed-through	16 A	20/30 A	25 A	
Rated voltage	24 DC	24 V	24 V	
Rated impulse voltage				
Pollution degree				

NGN: Indicator: R = 2.2 K 0,35W
Lamp color: green

PGN: Indicator: R = 2.2 K 0,35W
Lamp color: green

Accessories for **selos** WK 2,5-4 KOI/U...




Accessories	Type	Part No.	Std. Pack	
End plate	gray	AP 2,5-4 K0	07.310.9355.0	50
Partition	gray	TW 2,5-4 K0	07.310.9455.0	50
Cross connector for voltage supply	2-pole	VB WK 2,5 K0-2	07.257.0227.0	100
	3-pole	VB WK 2,5 K0-3	07.257.0327.0	100
	up to 20-pole	VB WK 2,5 K0-20	07.257.2027.0	50
Partition plate with marking facility	yellow	TS 2,5 GELB	07.311.2053.8	10
Single cover with marking facility	yellow	AD VB 2,5 GELB	04.326.2053.8	10
Cover strip for cross connectors over 10 blocks		AD VB 5/10	04.342.0556.0	10
Tear-off marking strip, red, marked "+"	red	9705 A/5/10 B + ROT	04.855.0253.5	25
Tear-off marking strip, blue, marked "-"	blue	9705 A/5/10 B - BLAU	04.855.0353.6	25


Fuse blocks with screw connection

WK 4 TKG... with THSi 5x20

- Disconnect base block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²

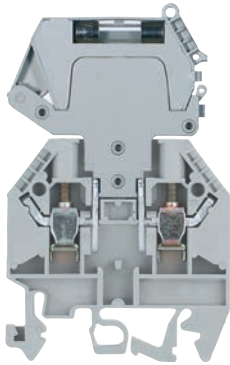


Description	Type	Part No.	Std. Pack
Disconnect base block	gray WK 4 TKG/U	57.504.4055.0	100
Fuse disconnect lever	gray THSi 5x20	Z1.298.1053.0	10
Fuse disconnect lever with LED 12-24V ²⁾	THSi 5x20 LED24	Z1.298.1153.0	10
Fuse disconnect lever with LED 24-60V ²⁾	THSi 5x20 LED60	Z1.298.1253.0	10
Fuse disconnect lever with GL 110-250V ²⁾	THSi 5x20 GL250	Z1.298.1353.0	10


General data				
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 81 mm			
Wire strip length	9 mm			
Approvals				
Technical data		IEC	UL	CSA
	EN 60947-7-1, EN 60 127-6			
Cross section fine-stranded	0.5-4 mm ²			
Cross section solid/stranded	0.5-6 mm ²			
Cross section, AWG		22-10	20-10	
Rated current	1 ¹⁾	10 A ¹⁾	6.3 A ¹⁾	
Rated voltage	690 V ²⁾	300 V ²⁾	250 V ²⁾	
Rated impulse voltage	6 kV			
Pollution degree	3			

WK 4 TKG... with THSi 6,3x32

- Disconnect base block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²

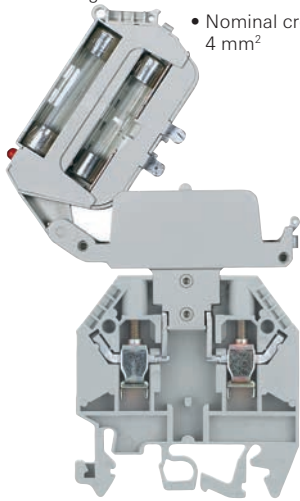

Description	Type	Part No.	Std. Pack
Disconnect base block	gray WK 4 TKG/U	57.504.4055.0	100
Fuse disconnect lever	gray THSi 6,3x32	Z1.298.1653.0	10
Fuse disconnect lever with LED 12-24V ²⁾	THSi 6,3x32 LED24	Z1.298.1753.0	10
Fuse disconnect lever with LED 24-60V ²⁾	THSi 6,3x32 LED60	Z1.298.1853.0	10
Fuse disconnect lever with GL 110-250V ²⁾	THSi 6,3x32 GL250	Z1.298.1953.0	10

General data				
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 81 mm			
Width disconnect lever THSi 6.3x32	8 mm	use end plate 07.311.6155.0 to maintain pitch		
Wire strip length	9 mm			
Approvals				
Technical data		IEC	UL	CSA
	EN 60947-7-1, EN 60 127-6			
Cross section fine-stranded	0.5-4 mm ²			
Cross section solid/stranded	0.5-6 mm ²			
Cross section, AWG		22-10	20-10	
Rated current	1 ¹⁾	10 A ¹⁾	6.3 A ¹⁾	
Rated voltage	690 V ²⁾	300 V ²⁾	250 V ²⁾	
Rated impulse voltage	6 kV			
Pollution degree	3			

Technical information:

¹⁾ When selecting G fuse inserts, make sure that the specified maximum power loss is not exceeded. The current is determined by the inserted fuse.

²⁾ The voltage range is determined by the built-in LED display.

Maximum power loss at 23°C ambient temperature (according to DIN EN 60947-3)

Type	Rated Voltage	Overload protection		Exclusive short-circuit protection	
		Single arrangement	Group arrangement	Single arrangement	Group arrangement
THSi 5x20	250 V	2.5 W	1.6 W	4.0 W	2.5 W
THSi 6,3x32	500 V	2.5 W	1.6 W	4.0 W	4.0 W
SIST	250 V	2.5 W	1.6 W	2.5 W	2.5 W

Depending on the application and the installation method, the possibility of increased temperature must be checked in the closed fuse holders.


Higher ambient temperatures mean additional stress for the fuse inserts. Therefore, the reduction of the rated current must be considered accordingly in these applications.

Indicator (24 V): Lamp color: red
Power consumption: 10.3 mA

Indicator (220 V): Lamp color: red
Power consumption: 0.3 mA

WK 4 TKG... SIST

- Disconnect base block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²

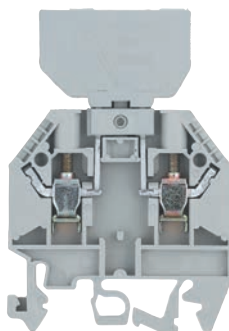


Description	Type	Part No.	Std. Pack
Disconnect base block	gray WK 4 TKG/U	57.504.4055.0	100
Fuse holder for 5x20 fuse	Si ST	Z1.299.4055.0	10
Fuse holder with LED 24-60V	Si ST LED	Z1.299.4155.0	10
Fuse holder with GL 220V	Si ST GL	Z1.299.4255.0	10

General data

Width / length / height, incl. TS 7.5	6 mm / 48 mm / 68 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	0.5–4 mm ²		
Cross section solid/stranded	0.5–6 mm ²		
Cross section, AWG	22–10		
Rated current	1)	10 A	6.3 A ¹⁾
Rated voltage	690 V ²⁾	300 V	250 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WK 4 TKG... DIST

- Disconnect base block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²

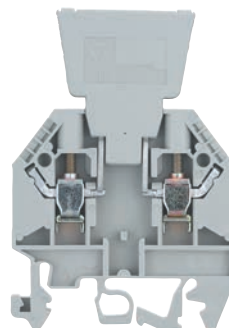

Description	Type	Part No.	Std. Pack
Disconnect base block	gray WK 4 TKG/U	57.504.4055.0	100
Diode plug - without contacts	DIST ...	Z1.299.3055.0	10
Diode plug - diode	I _{max} = 1 A DIST-1 N 4007-1 ³⁾	Z1.299.3155.0	10
Diode plug - diode	I _{max} = 1 A DIST-1 N 4007-2 ⁴⁾	Z1.299.3355.0	10
Diode plug with jumper	I _{max} = 10 A DIST-D	Z1.299.3255.0	10


General data

Width / length / height, incl. TS 7.5	6 mm / 48 mm / 68 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	0.5–4 mm ²		
Cross section solid/stranded	0.5–6 mm ²		
Cross section, AWG	22–10		
Rated current		10 A	6.3 A ¹⁾
Rated voltage	690 V ²⁾	300 V	250 V
Rated impulse voltage	6 kV		
Pollution degree	3		

The current carrying load depends on the component used.

Temporary peak voltage 1000 V.

Pole assignment Anode Cathode³⁾
of the diode: Cathode Anode⁴⁾

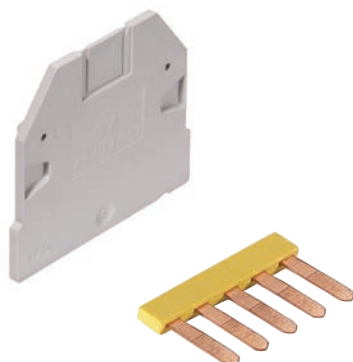Accessories for selos WK 4 TKG... with THSi5..., SIST... and DIST...

Accessories	Type	Part No.	Std. Pack
End plate	gray AP 4 TK	07.311.6155.0	10
Partition	gray TW 4 TK	07.311.8155.0	10
Jumper comb, insulated	2-pole	IVB 1 WK 4..-2	Z7.255.4227.0
	3-pole	IVB 1 WK 4..-3	Z7.255.4327.0
	up to 6-pole	IVB 1 WK 4..-6	Z7.255.4627.0

Fuse- and knife edge disconnect blocks with screw connection

WK 4/Si-D/U 5x25


- Fuse block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²



Description	Type	Part No.	Std. Pack
Fuse block	gray		
w. G-screw cap B DIN 41674, 5x25mm	WK 4/Si-D/U 5 x 25	57.504.1655.0	50
w. G-SG-screw cap A DIN 41674, 5x20mm	WK 4/Si-D/U 5 x 20	57.504.1755.0	50
General data			
Width / length / height, incl. TS 7.5	12 mm / 48 mm / 49 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	0.5–4 mm ²		
Cross section solid/stranded	0.5–6 mm ²		
Cross section, AWG			20–10
Rated current	6.3 A		10 A
Rated voltage	690 V		250 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WK 4/TKM


- Knife edge disconnect block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²
- * **Version with test bolt:** CSA: 300V
EN 60 947-7-1 – 400V/4kV/3
Test bolt can be loaded with 1A

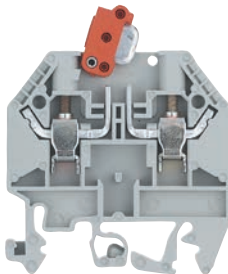

Description	Type	Part No.	Std. Pack
Knife edge disconnect block	gray	WK 4/TKM/U	57.504.2055.0
Knife edge disconnect block	blue	WK 4/TKM/U BLAU	57.504.2055.6
with 2 test bolts	gray	WK 4/TKM/P3/U	57.504.2355.0
General data			
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 49 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	0.5–4 mm ²		
Cross section solid/stranded	0.5–6 mm ²		
Cross section, AWG		22–10	22–10
Rated current	20 A	20 A	20 A
Rated voltage	690 V	600 V	600 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WK 4 TKG-TRST/U

- Invertible plug disconnect block with screw connection for mounting on TS 35 and 42
- Nominal cross section 4 mm²
- * **Version with test bolt:** CSA: 300V
EN 60 947-7-1 – 400V/4 kV/3
Test bolt can be loaded with 1 A

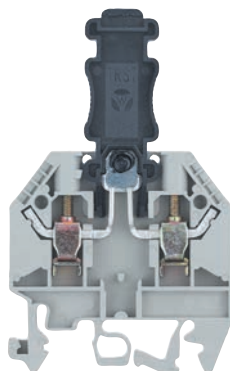


Description	Type	Part No.	Std. Pack
Invertible plug disconnect block	gray	WK 4 TKG-TRST/U	57.504.4555.0
with 2 test bolts, gray		WK 4 TKG-TRST P3/U	57.504.4855.0

General data			
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 78 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60 127-6		
Cross section fine-stranded	0.5–4 mm ²		
Cross section solid/stranded	0.5–6 mm ²		
Cross section, AWG		22–10	22–10
Rated current	20 A	10 A	20 A
Rated voltage	690 V	300 V	600 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WK 4 TKS D/U


- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²
- Same dimensions as types WK 4 TKG/U and types WK 4/TKM/U



Description	Type	Part No.	Std. Pack
Feed-through block	gray	WK 4 TKS D/U	57.504.4455.0

General data			
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 49 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60 127-6		
Cross section fine-stranded	0.5–4 mm ²		
Cross section solid/stranded	0.5–6 mm ²		
Cross section, AWG		22–10	20–10
Rated current	32 A	25 A	20 A
Rated voltage	690 V	300 V	600 V
Rated impulse voltage	6 kV		
Pollution degree	3		

Accessories for *selos* WK 4...

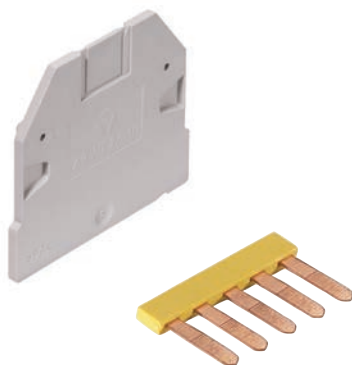


Accessories	Type	Part No.	Std. Pack
End plate	gray	AP 4 TK	07.311.6155.0
Partition	gray	TW 4 TK	07.311.8155.0
Jumper comb, insulated	2-pole	IVB 1 WK 4..-2	Z7.255.4227.0
	3-pole	IVB 1 WK 4..-3	Z7.255.4327.0
	up to 6-pole	IVB 1 WK 4..-6	Z7.255.4627.0

Fuse blocks with screw connection

WK 4 THSi 5.../U

- Integrated lever-action fuse block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 4 mm²
- For 5mm miniature fuses
- The standard block has a storage location for a replacement fuse.

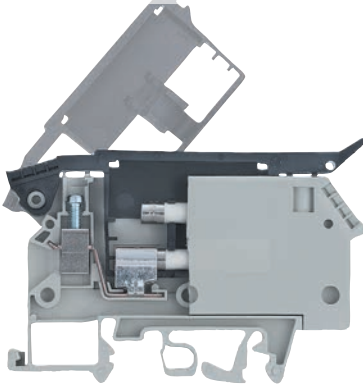


Description	Type	Part No.	Std. Pack	
Fuse block	gray	WK 4/THSi 5 ... U	57.904.5355.0	50
- with LED 5-12V~/=	current consumed. 2.3-7 mA	WK 4/THSi 5 LED 12 U	57.904.5455.0	50
- with LED 12-24V~/=	current con. 2.8-6.2 mA	WK 4/THSi 5 LED 24 U	57.904.5555.0	50
- with LED 24-60V~/=	current con. 1.5-4 mA	WK 4/THSi 5 LED 60 U	57.904.5655.0	50
- with GL110-250V~/=	current con.0.13-0.55 mA	WK 4/THSi 5 GL 250 U	57.904.5755.0	50
- with GL380-500V~/=	current con. 0.2-0.3 mA	WK 4/THSi 5 GL 500 U	57.904.5855.0	50

General data			
Width / length / height, incl. TS 7.5	8 mm / 77 mm / 54 mm		
Wire strip length	8 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	0,5-4 mm ²		
Cross section solid/stranded	0,5-6 mm ²		
Cross section, AWG		22-10	22-10
Rated current	6.3 A ¹⁾	15 A	6.3 A
Rated voltage	800 V ²⁾	600 V ²⁾	600 V ²⁾
Rated impulse voltage	8 kV		
Pollution degree	3		

WK 4 THSi 6,3.../U

- Integrated lever-action fuse block with screw connection for mounting on TS 35 and TS32
- Nominal cross section 4 mm²
- For 6.3mm miniature fuses
- The standard block has a storage location for a replacement fuse.

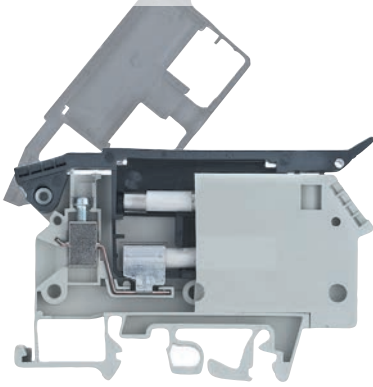

Description	Type	Part No.	Std. Pack	
Fuse block	gray	WK 4/THSi 6,3 ... U	57.904.6355.0	50
- with LED 5-12V~/=	current consumed. 2.3-7 mA	WK 4/THSi 6,3 LED 12 U	57.904.6455.0	50
- with LED 12-24V~/=	current con. 2.8-6.2 mA	WK 4/THSi 6,3 LED 24 U	57.904.6555.0	50
- with LED 24-60V~/=	current con. 1.5-4 mA	WK 4/THSi 6,3 LED 60 U	57.904.6655.0	50
- with GL110-250V~/=	current con.0.13-0.55 mA	WK 4/THSi 6,3 GL 250 U	57.904.6755.0	50
- with GL380-500V~/=	current con. 0.2-0.3 mA	WK 4/THSi 6,3 GL 500 U	57.904.6855.0	50

General data			
Width / length / height, incl. TS 7.5	10 mm / 77 mm / 54 mm		
Wire strip length	8 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	0,5-4 mm ²		
Cross section solid/stranded	0,5-6 mm ²		
Cross section, AWG		22-10	22-10
Rated current	10 A ¹⁾	15 A	10 A
Rated voltage	800 V ²⁾	600 V ²⁾	600 V ²⁾
Rated impulse voltage	8 kV		
Pollution degree	3		

Technical information for selos WK 4 THSi...

The fuse blocks of this type have a flip top disconnect lever. It accepts miniature fuses of 5x20, 5x25 and 5x30mm (terminal width: 8mm) or 6.3x32mm (terminal width: 10mm). The hinged lever has latch points both in the open and in the closed position, and can be sealed.

All terminal blocks are available in two different versions, i.e. with or without red LEDs functioning as indicators.

¹⁾ When selecting G fuse inserts, make sure that the specified maximum power loss is not exceeded. The current is determined by the inserted fuse.

²⁾ The voltage range is determined by the built-in LED display. Depending on the application and the installation method, the circumstances for increased temperature must be checked in the closed fuse holders. Higher ambient temperatures are an additional load for the fuse inserts. Therefore, the reduction of the rated current must be considered accordingly in these applications.

¹⁾ Maximum power loss at 23°C ambient temperature (according to DIN EN 60947-7-3)

Type	Rated voltage	Overload protection		Exclusive short-circuit protection	
		Single arrangement	Group arrangement	Single arrangement	Group arrangement
THSi 5x20/25	250V	1.6W	1.6W	4.0W	2.5W
THSi 6,3x32	500V	2.5W	2.5W	4.0W	2.5W
THSi 5x30	500V	1.6W	1.6W	4.0W	2.5W

Accessories and info for selos WK 10/SI...

Accessories	Type	Part No.	Std. Pack	
End plate	gray	AP 10/Si	07.311.4155.0	10
Cross connector with screws	2-pole	VB WK 10/Si-2	Z7.287.0227.0	10
	3-pole	VB WK 10/Si-3	Z7.287.0327.0	10
	up to 6-pole	VB WK 10/Si-6	Z7.287.0627.0	10
Transparent block cover (for 1 block)			04.312.2056.0	100


¹⁾ Maximum power loss at 23°C ambient temperature (according to DIN EN 60947-7-3)

Type	Overload protection		Exclusive short-circuit protection	
	Single arrangement	Group arrangement	Single arrangement	Group arrangement
WK 10 Si U 5x20	4.0W/10A	2.5W/6.3A	4.0W/10A	4.0W/6.3A
WK 10 Si U 6.3x32	4.0W/10A	2.5W/2.5A	4.0W/10A	2.5W/2.5A
WK 10 Si U 5x25	4.0W/10A	2.5W/6.3A	4.0W/10A	4.0W/6.3A
WK 10 Si U 5x30	4.0W/10A	2.5W/6.3A	4.0W/10A	4.0W/6.3A

WK 10/SI .../U

- Fuse block with screw cap for mounting on TS 35
- Nominal cross section 10 mm²

* Voltage and current are determined by the built-in LED and the inserted G-fuse.

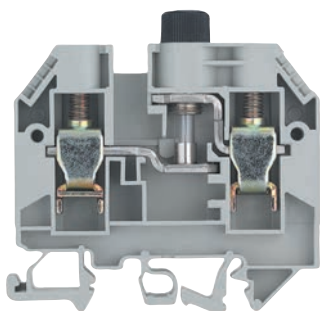


Description	Type	Part No.	Std. Pack
Fuse block, with screw cap	gray		
- A DIN 41674 for G-fuses DIN 41571	WK 10/Si U 5 x 20	57.910.5055.0	50
- B DIN 41674 for G-fuses DIN 41576	WK 10/Si U 5 x 25	57.910.5155.0	50
- A DIN 41674 for G-fuses	WK 10/Si U 5 x 30	57.910.5255.0	50
- with screw cap for G-fuses	WK 10/Si U 6,3 x 32	57.910.5355.0	50

General data			
Width / length / height, incl. TS 7.5	12 mm / 65 mm / 58 mm		
Wire strip length	13 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	1.0–10 mm ²		
Cross section solid/stranded	1.0–16 mm ²		
Cross section, AWG		22–6	16–6
Rated current	max. 10 A ¹⁾	15 A	max. 15 A
Rated voltage	500 V*	600 V*	600 V*
	* 57.910.5055.0	250V~	600V
	* 57.910.5155.0	250V~	600V
	* 57.910.5255.0	500V~	600V
	* 57.910.5355.0	500V~	600V
Rated impulse voltage	6 kV		
Pollution degree	3		

WK 10/SI .../U with indicator

- Fuse block with screw cap for mounting on TS 35 and TS 32
- Nominal cross section 10 mm²
- With indicator

* Voltage and current are determined by the built-in indicator and the inserted G-fuse.

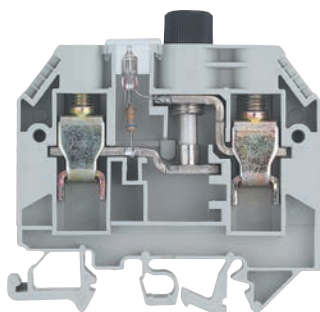


Description	Type	Part No.	Std. Pack
Fuse block, with screw cap	gray		
- A DIN 41674 for G-fuses DIN 41571	WK 10/Si U 5 x 20M, NGL	57.910.5455.0	50
- B DIN 41674 for G-fuses DIN 41576	WK 10/Si U 5 x 20M, GLB	57.910.5855.0	50
- A DIN 41674 for G-fuses	WK 10/Si U 6,3 x 32M, NGL	57.910.5755.0	50
- with screw cap for G-fuses	WK 10/Si U 6,3 x 32M, GLB	57.910.6155.0	50

General data			
Width / length / height, incl. TS 7.5	12 mm / 65 mm / 58 mm		
Wire strip length	13 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1, EN 60127-6		
Cross section fine-stranded	1.0–10 mm ²		
Cross section solid/stranded	1.0–16 mm ²		
Cross section, AWG		22–6	16–6
Rated current	max. 10 A ¹⁾	15 A	max. 15 A
Rated voltage	500 V*	600 V*	600 V*
Indicator – Current consumed			
red – 0.16–0.8 mA	* 57.910.5455.0	110–250V~	150V
yellow – 24 mA	* 57.910.5855.0	28V~	28V
red – 0.16–0.8 mA	* 57.910.5755.0	110–500V~	150V
yellow – 24 mA	* 57.910.6155.0	28V~	28V
Rated impulse voltage	6 kV		
Pollution degree	3		

WK 10/SI U D

- Feed-through block with screw connection for mounting on TS 35
- Nominal cross section 10 mm²
- Same dimensions as fuse block

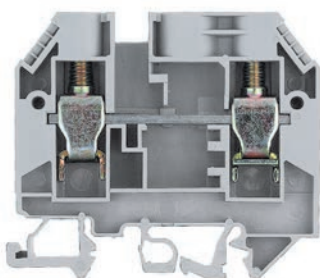

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WK 10/Si U D	57.910.4955.0


General data			
Width / length / height, incl. TS 7.5	12 mm / 65 mm / 58 mm		
Wire strip length	13 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.5–4 mm ²		
Cross section solid/stranded	0.5–6 mm ²		
Cross section, AWG		22–6	16–6
Rated current	57 A	50 A	65 A
Rated voltage	500 V	600 V	600 V
Rated impulse voltage	6 kV		
Pollution degree	3		

Feed-through blocks with *wiecon* pluggable connection

for PC board terminal type 8113 B, type 8313 B, type 8113 B/VL, type 8113 B/VR, type 8113 B/Top

WK 2,5 U/D/8113 S/V

- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2,5 mm²

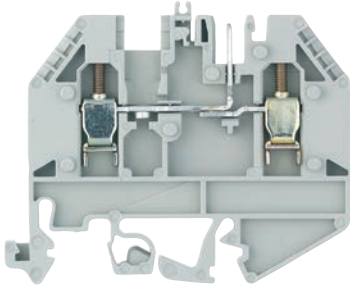


Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK 2,5 U/D/8113 S/V...	57.503.2155.0	50
Power block	blue	WK 2,5 U/D/8113 S/V/VK	57.503.2555.6	50
Feed-through block, with LED 25 V	gray	WK 2,5 U/D/8113 S/V/LED 25	57.503.2255.0	50
Feed-through block, with LED 50 V	gray	WK 2,5 U/D/8113 S/V/LED 50	57.503.2355.0	50
General data				
Width / length / height, incl. TS 7.5	5 mm / 61 mm / 51 mm			
Wire strip length	9 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.5–2,5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG		22–12	24–12	
Rated current	12 A	15 A	15 A	
Rated voltage	250 V	300 V	300 V	
Rated impulse voltage	4 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP 2,5 U/D/8113 S/V	07.311.9055.0	10
Spacer*	2.5 mm thick	ZP 2,5 U/D/8113 S/V	07.311.9155.0	10
Cover strip for LED, transparent	10-pole	AD VB 5/10 P	04.342.3556.8	10
Coding strip			05.561.0053.0	100

* for *wiecon* PC board connector with 7.5 mm pitch

WK 2,5 U/8113 S/V

- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2,5 mm²

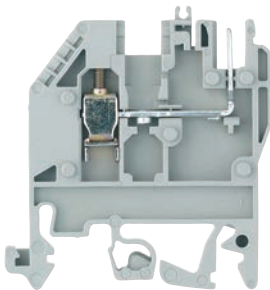


Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK 2,5 U/8113 S/V...	57.503.2655.0	50
Power block	blue	WK 2,5 U/8113 S/V/VK	57.503.3055.6	50
Feed-through block, with LED 25 V	gray	WK 2,5 U/8113 S/V/LED 25	57.503.2755.0	50
Feed-through block, with LED 50 V	gray	WK 2,5 U/8113 S/V/LED 50	57.503.2855.0	50
General data				
Width / length / height, incl. TS 7.5	5 mm / 44 mm / 51 mm			
Wire strip length	9 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.5–2,5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG		22–12	24–12	
Rated current	12 A	15 A	15 A	
Rated voltage	250 V	300 V	300 V	
Rated impulse voltage	4 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP 2,5 U/8113 S/V	07.312.1555.0	10
Spacer*	2.5 mm thick	ZP 2,5 U/8113 S/V	07.312.1655.0	10
Coding strip			05.561.0053.0	100

* for *wiecon* PC board connector with 7.5 mm pitch

WK 2,5 U/D/8113 S/H

- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2,5 mm²

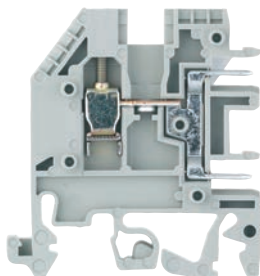

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK 2,5 U/8113 S/H	57.503.2055.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 44 mm / 48 mm			
Wire strip length	9 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.5–2,5 mm ²			
Cross section solid/stranded	0.5–4 mm ²			
Cross section, AWG		22–12	24–12	
Rated current	12 A	20 A	15 A	
Rated voltage	250 V	300 V	300 V	
Rated impulse voltage	4 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP 2,5 U/8113 S/H	07.311.9855.0	10
Coding strip			05.584.0053.0	100
Locking piece	10-pole		05.576.5853.0	25

Type 8113 B/..., 8313 B/...

- Mating orientation parallel to wire entry
- For additional pluggable blocks, see **wiecon** product family



Description	Type	Part No.	Std. Pack
Spacing 5.00 mm, Rated voltage 250V			
unmarked, starting at 2	8113 B/2 0B	25.320.3253.0	100
up to 16	8113 B/16 0B	25.320.4653.0	50
marked with 1- x, starting at 2	8113 B/2	25.320.0253.0	100
up to 16	8113 B/16	25.320.1653.0	50
Spacing 7.50 mm, Rated voltage 400V			
unmarked, starting at 2	8313 B/2 0B	25.360.3253.0	100
up to 12	8313 B/12 0B	25.360.4253.0	50
marked with 1- x, starting at 2	8313 B/2	25.360.0253.0	100
up to 12	8313 B/12	25.360.1253.0	50
General data			
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.5–2.5 mm ²		
Cross section solid/stranded	0.5–4 mm ²		
Cross section, AWG		22–12	24–12
Rated current	12 A	15 A	15 A
Rated voltage	250 V	300 V	300 V
Rated impulse voltage	400 V		
Pollution degree			
Accessories			
Coding strip	Type	Part No.	Std. Pack
		05.561.9153.0	100

Type 8113 B/... VR

- Mating orientation 90° towards the wire
- For additional pluggable blocks, see **wiecon** product family



Description	Type	Part No.	Std. Pack
Spacing 5.00 mm, Rated voltage 250V			
unmarked, starting at 2	8113 B/2 VR 0B	25.325.3253.0	100
up to 16	8113 B/16 VR 0B	25.325.4653.0	50
marked with 1- x, starting at 2	8113 B/2	25.325.0253.0	100
up to 16	8113 B/16	25.325.1653.0	50
General data			
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.5–2.5 mm ²		
Cross section solid/stranded	0.5–4 mm ²		
Cross section, AWG		22–12	24–12
Rated current	12 A	15 A	15 A
Rated voltage	250 V	300 V	300 V
Rated impulse voltage	400 V		
Pollution degree			
Accessories			
Coding strip	Type	Part No.	Std. Pack
		05.561.9153.0	100

Accessories for **selos** WK 2,5 U/...




Accessories	Type	Part No.	Std. Pack
Cross connector with screws, insulated	2-pole	VB WK 2,5-2	10
	3-pole	IVB WK 2,5-3	10
	12-pole	IVB WK 2,5-12	10
Partition plate with marking facility	yellow	TS 2,5 GELB	10
Single cover with marking facility	yellow	AD VB 2,5 GELB	10
Cover strip for PCB terminal	24-pole	04.343.9056.8	10
with warning symbol	24-pole	04.343.9156.8	10
Connection rail	L = 0,4m	05.561.4125.0	1
for connection to power block (blue) and indicator			

Distribution blocks with screw/push-on connection

WK/4-8 S/IW/U


- Feed-through block with push-on connection for mounting on TS 35
- Push-on connectors 2.8 x 0.8 acc. to DIN 46247
Push-on connectors 6.3 x 0.8 acc. to DIN 46247
- Current carrying capability according to DIN 46249
Tab connector 2.8 10A
 6.3 20A

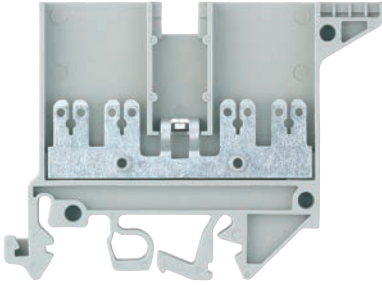

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK/4-8 S/IW/U	57.504.6355.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 67 mm / 50 mm			
Wire strip length				
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1, EN 61210			
Cross section fine-stranded				
Cross section solid/stranded				
Cross section, AWG	22-12			
Rated current	20 A	10 A	10 A	
Rated voltage	800 V ⁽¹⁾	600 V ⁽¹⁾	300 V ⁽¹⁾	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP 3 S/IW	07.311.4355.0	50
Cross connector with screws	2-pole	VB WK/...S/IW/U-2	Z7.281.3327.0	10
	3-pole	VB WK/...S/IW/U-3	Z7.281.3327.0	10
	up to 6-pole	VB WK/...S/IW/U-6	Z7.281.3627.0	10

WK/4-8 S/U


- Feed-through block with push-on connection for mounting on TS 35
- Push-on connectors 2.8 x 0.8 acc. to DIN 46247
Push-on connectors 6.3 x 0.8 acc. to DIN 46247
- Current carrying capability according to DIN 46249
Tab connector 2.8 10A
 6.3 20A

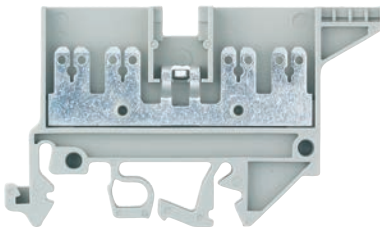

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK/4-8 S/U	57.504.6255.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 67 mm / 40 mm			
Wire strip length				
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1, EN 61210			
Cross section fine-stranded				
Cross section solid/stranded				
Cross section, AWG	22-12			
Rated current	20 A	10 A	10 A	
Rated voltage	800 V ⁽¹⁾	300 V ⁽¹⁾	300 V ⁽¹⁾	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP 4 S	07.311.4255.0	10
Cross connector with screws	2-pole	9703/6-2	Z7.211.0227.0	50
	3-pole	9703/6-3	Z7.211.0327.0	50
	up to 6-pole	9703/6-6	Z7.211.0627.0	50

WK/3-6 S KO/U


- Feed-through block with push-on connection for mounting on TS 35
- Nominal cross section 4,0 mm²
- Push-on connectors 2.8 x 0.8 acc. to DIN 46247
Push-on connectors 6.3 x 0.8 acc. to DIN 46247
- Current carrying capability according to DIN 46249
Tab connector 2.8 10A
 6.3 20A

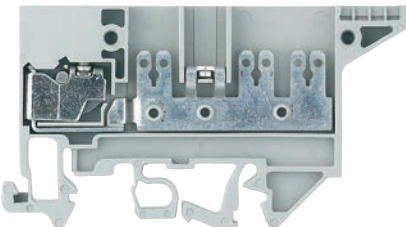

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK/3-6 S KO/U	57.504.7355.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 72 mm / 40 mm			
Wire strip length	9 mm			
Approvals				
Technical data	IEC	UL	CSA	
For use with insulating sleeves	EN 60947-7-1, EN 61210			
Cross section fine-stranded	0.5-4 mm ²			
Cross section solid/stranded	0.5-4 mm ²			
Cross section, AWG	22-12			
Rated current	20 A	10 A	10 A	
Rated voltage	690 V ⁽¹⁾	300 V ⁽¹⁾	300 V ⁽¹⁾	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	9701 A/6 1 S KO TP 2	07.310.5855.0	10
Cross connector with screws	2-pole	2072/2	Z7.220.0227.0	50
	3-pole	2072/2	Z7.220.0227.0	50
	up to 6-pole	2072/6	Z7.220.0627.0	50

WK 4 3-6 S 1 K/U


- Feed-through block with push-on connection for mounting on TS 35
- Nominal cross section 4 mm²
- Push-on connectors 2.8 x 0.8 acc. to DIN 46247
Push-on connectors 6.3 x 0.8 acc. to DIN 46247
- Current carrying capability according to DIN 46249
Tab connector 2.8 10 A
 6.3 20 A

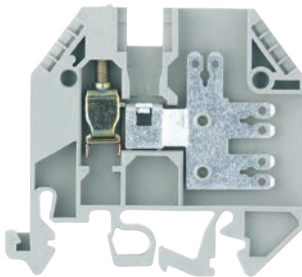

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK 4 3-6 S 1 K/U	57.504.3755.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 52 mm / 48 mm			
Wire strip length	9 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1, EN 61 210			
Cross section fine-stranded	0.5–4 mm ²			
Cross section solid/stranded	0.5–6 mm ²			
Cross section, AWG		22–12	22–12	
Rated current	20 A	10 A	10 A	
Rated voltage	800 V ¹⁾	300 V ¹⁾	300 V ¹⁾	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP4 3 S 1 K	07.311.3855.0	10
Cross connector with screws	2-pole	IVB WK 4-2	Z7.281.1227.0	10
	3-pole	IVB WK 4-3	Z7.281.1327.0	10
	up to 12-pole	IVB WK 4-12	Z7.281.2227.0	10


WK/5-10 S/U

- Feed-through block with push-on connection for mounting on TS 35
- Push-on connectors 2.8 x 0.8 acc. to DIN 46247
Push-on connectors 6.3 x 0.8 acc. to DIN 46247
- Current carrying capability according to DIN 46249
Tab connector 2.8 10 A
 6.3 20 A

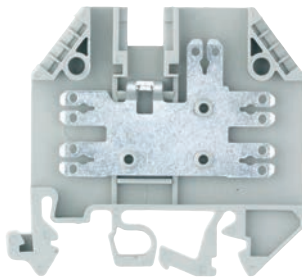

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WK/5-10 S/U	57.504.3655.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 52 mm / 48 mm			
Wire strip length				
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1, EN 61 210			
Cross section fine-stranded				
Cross section solid/stranded				
Cross section, AWG			22–12	
Rated current	20 A	10 A	10 A	
Rated voltage	800 V ¹⁾	300 V ¹⁾	300 V ¹⁾	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP 5 S	07.311.4655.0	10
Cross connector with screws	2-pole	IVB WKI 4-2	Z7.271.4227.0	10
	3-pole	IVB WKI 4-3	Z7.271.4327.0	10
	up to 12-pole	IVB WKI 4-12	Z7.271.5227.0	10

Accessories for *selos* WK/...

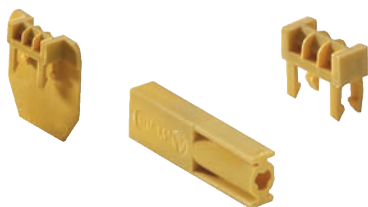


Accessories	Type	Part No.	Std. Pack	
Partition plate with marking facility	yellow	TS 4 GELB	07.311.2153.8	10
Single cover with marking facility	yellow	AD VB 4 GELB	04.326.2153.8	10
Insulating sleeve for tab connector for H0. V-K 1.5 mm ²	yellow		05.592.7553.0	2000
for H0. V-K 2.5 mm ²	yellow		05.592.7653.0	2000

¹⁾ Rating for use with insulating sleeves

Function blocks with screw connection

9786 U/12

- Function block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2.5 mm²

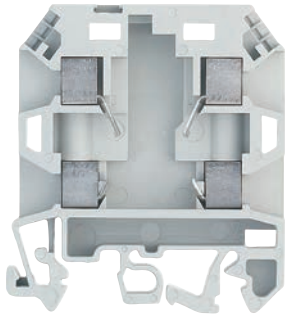

Description	Type	Part No.	Std. Pack
Function block empty	9786 U/12	57.904.2055.0	50
with bridge rectifier B380 C1500	9786 U/12 G4	57.904.2555.0	50
with optocoupler CNY 17/3	9786 U/12 OPK	57.904.2855.0	50

General data

Width / length / height, incl. TS 7.5	12 mm / 52 mm / 58 mm
Wire strip length	9 mm

Approvals

Technical data


	IEC	UL	CSA
Approvals	EN 60947-7-1		
Cross section fine-stranded	0.5–2.5 mm ²		
Cross section solid/stranded	0.5–2.5 mm ²		
Cross section, AWG		22–14	22–14
Rated current	24 A	6 A	6 A
Rated voltage	800 V	300 V	300 V
Rated impulse voltage	8 kV		
Pollution degree	3		



9785 U/... - SPT

- Compensating terminal with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2.5 mm²

Resistor range: 0.25Ω up to 100Ω
 Resistor tolerance: ± 10%
 Resistor range: 100Ω up to 50kΩ
 Resistor tolerance: ± 20%
 Limite continuous resistance value:
 0.75V up to 70°C
 Max. load: 100mA
 Temperature coefficient: 0 up to +500 ppm/°C
 Max. operating voltage: 300V

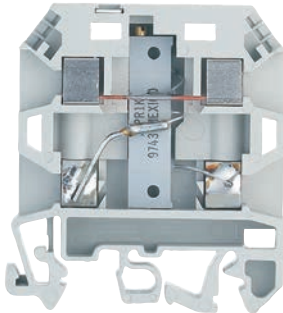


Description	Type	Part No.	Std. Pack	
Compensating terminal with potentiometer	gray 10 Ω	9785 U/10 Ω	57.904.0055.0	50
	20 Ω	9785 U/20 Ω	57.904.0155.0	50
	50 Ω	9785 U/50 Ω	57.904.0255.0	50
	100 Ω	9785 U/100 Ω	57.904.0355.0	50
	200 Ω	9785 U/200 Ω	57.904.0455.0	50
	510 Ω	9785 U/500 Ω	57.904.0555.0	50
	1 kΩ	9785 U/1 kΩ	57.904.0655.0	50
	2 kΩ	9785 U/2 kΩ	57.904.0755.0	50
	5 kΩ	9785 U/5 kΩ	57.904.0855.0	50
	10 kΩ	9785 U/10 kΩ	57.904.0955.0	50
	20 kΩ	9785 U/20 kΩ	57.904.1055.0	50
	50 kΩ	9785 U/50 kΩ	57.904.1155.0	50
Compensating terminal with potentiometer as voltage divider	gray 10 Ω	9785 U/10 Ω-SPT	57.904.3955.0	50
	20 Ω	9785 U/20 Ω-SPT	57.904.4155.0	50
	50 Ω	9785 U/50 Ω-SPT	57.904.4255.0	50
	100 Ω	9785 U/100 Ω-SPT	57.904.4355.0	50
	200 Ω	9785 U/200 Ω-SPT	57.904.4455.0	50
	510 Ω	9785 U/500 Ω-SPT	57.904.4555.0	50
	1 kΩ	9785 U/1 kΩ-SPT	57.904.4655.0	50
	2 kΩ	9785 U/2 kΩ-SPT	57.904.4755.0	50
	5 kΩ	9785 U/5 kΩ-SPT	57.904.4855.0	50
	10 kΩ	9785 U/10 kΩ-SPT	57.904.4955.0	50
	20 kΩ	9785 U/20 kΩ-SPT	57.904.5055.0	50
	50 kΩ	9785 U/50 kΩ-SPT	57.904.5155.0	50

General/Technical data

Width / length / height, incl. TS 7.5	12 mm / 49 mm / 58 mm
Wire strip length	9 mm
Approvals	EN 60947-7-1
Cross section fine-stranded	0.5–2.5 mm ²
Cross section solid/stranded	0.5–2.5 mm ²

9786 U/TSK...

- Thermocouple terminal with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 2,5 mm²

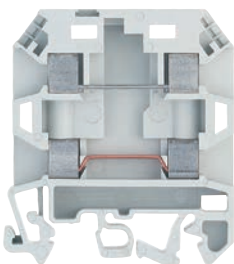

Description	Type	Part No.	Std. Pack
Thermocouple terminal type T-Cu/CuNi 44	9786 U/TSK Cu-CuNi	57.904.7355.0	50
Thermocouple terminal type E-NiCr/CuNi 44	9786 U/TSK NiCr-CuNi	57.904.7055.0	50
Thermocouple terminal type J-Fe/CuNi 44	9786 U/TSK Fe-CuNi	57.904.7155.0	50
Thermocouple terminal type K-NiCr/Ni	9786 U/TSK NiCr-Ni	57.904.7255.0	50
Thermocouple terminal type R-PtRh 13/Pt	9786 U/TSK E-Cu-A-Cu	57.904.7455.0	50

General data

Width / length / height, incl. TS 7.5	12 mm / 52 mm / 58 mm
Wire strip length	9 mm


Approvals

Technical data

	IEC	UL	CSA
Approvals	EN 60947-7-1		
Cross section fine-stranded	0.5–2.5 mm ²		
Cross section solid/stranded	0.5–2.5 mm ²		
Rated voltage	800 V		
Rated impulse voltage	8 kV		
Pollution degree	3		

Example:

Fe/constantan Fe/CuNi 44
 fully enclosed design



9786 U/12

- Ground disconnect with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 6 mm²



Description	Type	Part No.	Std. Pack
Ground disconnect 24-48V≅ with LED	9760 U/8 TKE 48	57.110.1655.0	25
110-220V≅ with indicator lamp	9760 U/8 TKE 220	57.110.1555.0	25

General data			
Width / length / height, incl. TS 7.5	17,5 mm / 71 mm / 52 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	1.0 – 10 mm ²		
Cross section solid/stranded	1.0 – 10 mm ²		
Cross section, AWG		18–8	18–8
Rated current	30 A	25 A	25 A
Rated voltage	24–48 V / 110–220 V	48 V / 220 V	48 V / 220 V
Rated impulse voltage			
Pollution degree			

EN60204 part 1/DIN VDE0113 part 1 "Fitting industrial machines with electrical equipment"

9.4.3.1. Ground faults.

Ground faults in any control circuits must not result in unintentional startup, potentially hazardous motions or shutdown of the machine.

During normal operation the auxiliary circuit is connected to the functional ground and the green (24-48V) or yellow (110-220V) status display is illuminated.

If a low resistance ground fault occurs, the line fuse will blow.


Once the contact separator is open, you can replace the fuse.

The illumination of the red lamp alone indicates an ground fault.


After the fault had been rectified, the green (24-48V) or yellow (110-220V) display will also light up. The contacts should now be moved to the "on" position as a result of which the red lamp will go out.

The illumination of the yellow or green lamp and external display indicates that the auxiliary circuit has been reconnected to the functional ground.

Ground Disconnect terminal with LED 24-48V≅

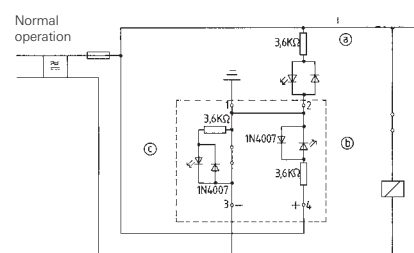


- Ⓐ external status display lights up
- Ⓑ green status display lights up
- Ⓒ red ground-fault indicator lights up

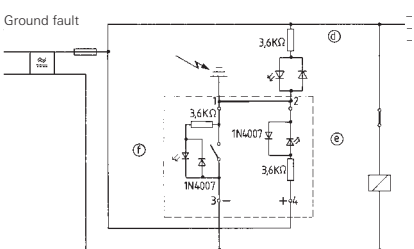


- Ⓓ external status display lights up
- Ⓔ green status display lights up
- Ⓕ red ground-fault indicator lights up

Ground Disconnect terminal with Neon Lamp 110-220 V≅

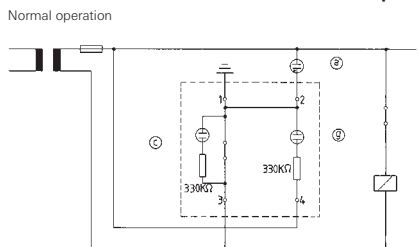


- Ⓖ yellow status display lights up

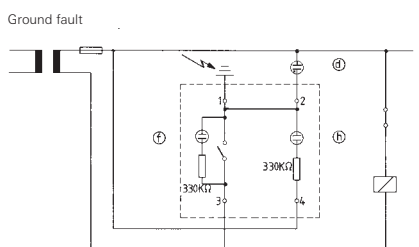

- Ⓗ yellow indicator light not flashing

Measuring disconnect blocks with screw connection

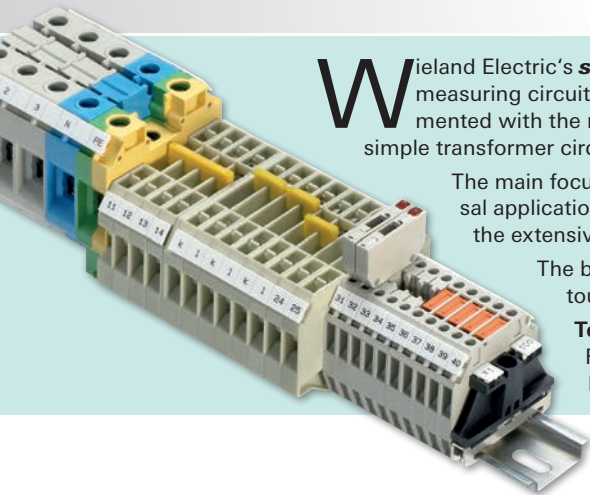


Wieland Electric's **selos** WKN 6 TK block offers a simple and effective DIN rail block solution for use in measuring circuits for current, voltage or energy. All circuits in everyday practice can be neatly implemented with the measuring disconnect block and a few accessory parts. Only two blocks are needed for simple transformer circuits.

The main focus during the development of this block was clear and simple handling as well as universal application. All switching states of the block and the converter circuit are clearly recognizable and the extensive accessory program is easy to use.

The block and the accessories meet the requirements of protection against accidental finger touch as per BGV A2.


Technical data as per EN 60947-7:

Rated cross section:	6mm ²	Rated current:	57A
Rated voltage:	400V	Connection capacity:	0.5-10mm ²

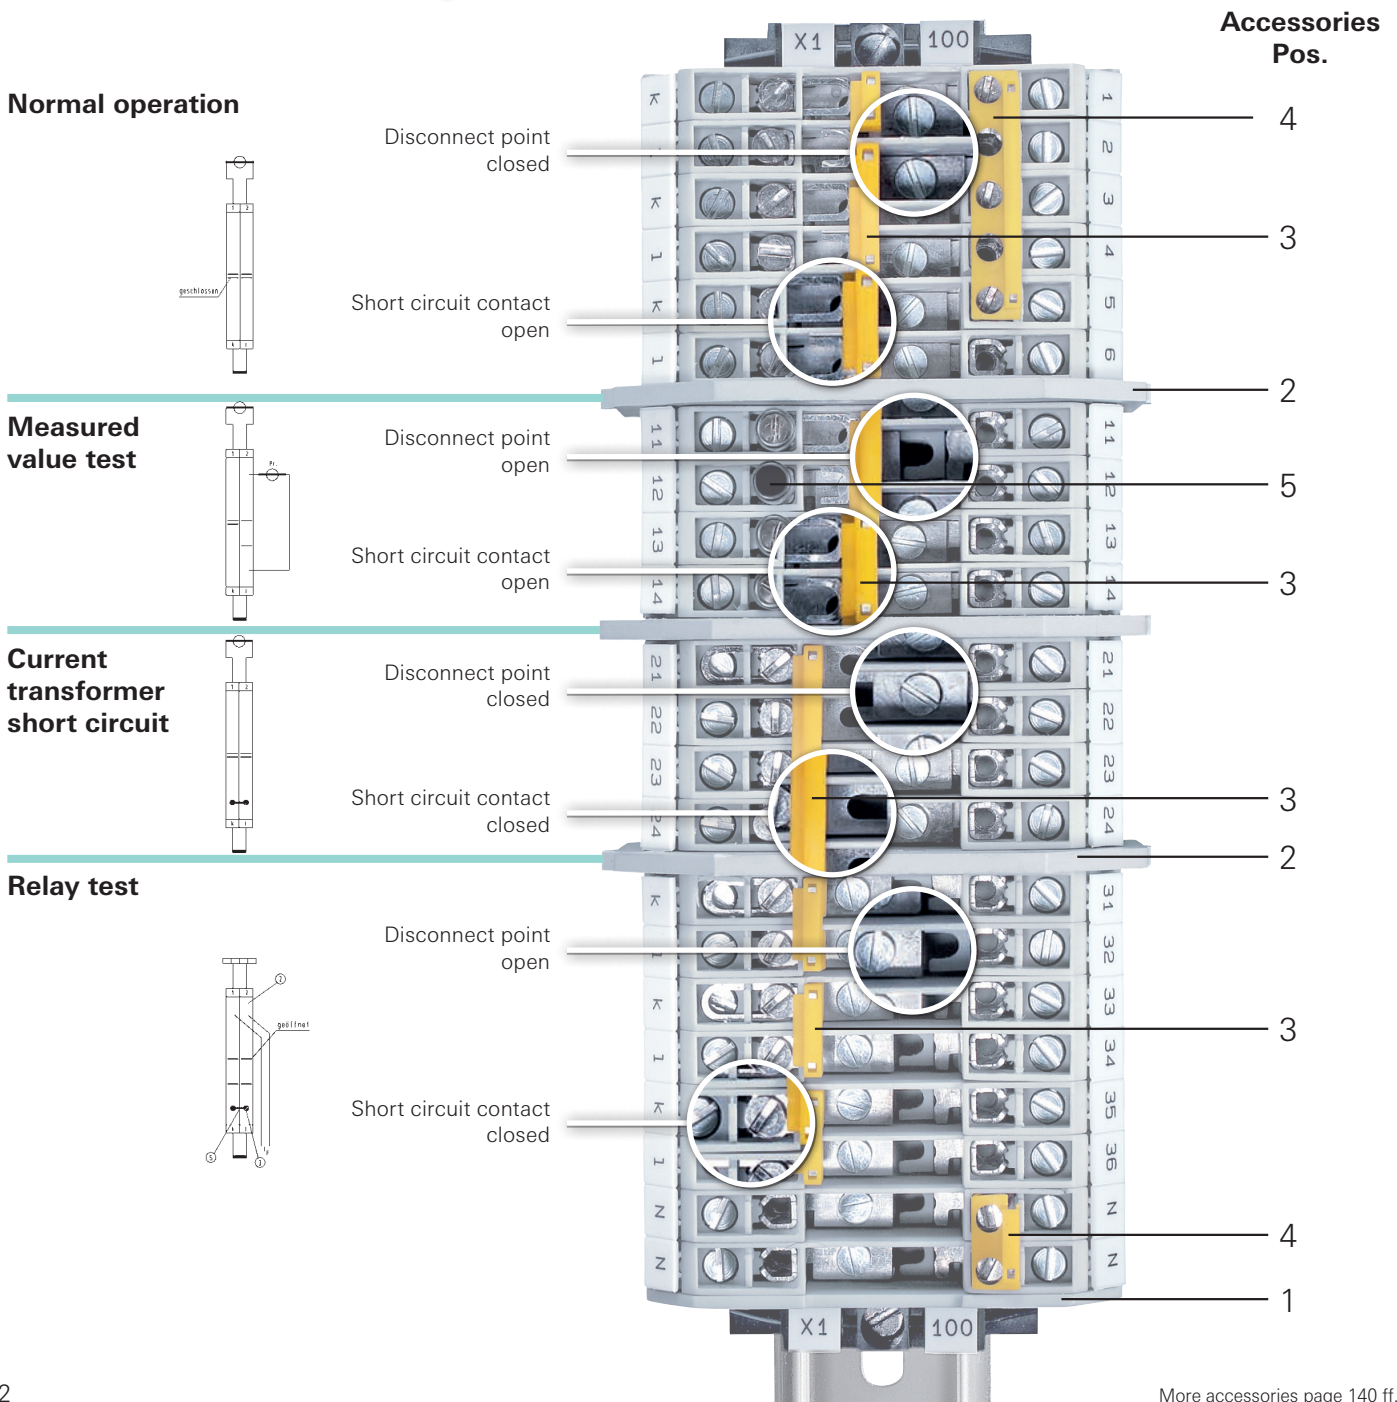

WKN 6 TK


- Measuring disconnect block for mounting on TS 35
- Nominal cross section 6 mm²

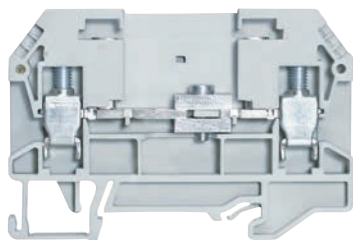

Description	Type	Part No.	Std. Pack
Measuring disconnect block	WKN6 TK	56.106.0055.0	50
Feed-through block	WKN6 TK D	56.106.0155.0	50
General data			
Width / length / height, incl. TS 7.5	8 mm / 73 mm / 58 mm		
Wire strip length	12 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.5–6 mm ²		
Cross section solid/stranded	0.5–10 mm ²		
Cross section, AWG			
Rated current	57 A		
Rated voltage	500 V		
Rated impulse voltage	6 kV		
Pollution degree	3		

WKN 6 TK SF

- Measuring disconnect block with spring support for mounting on TS 35
- Nominal cross section 6 mm²

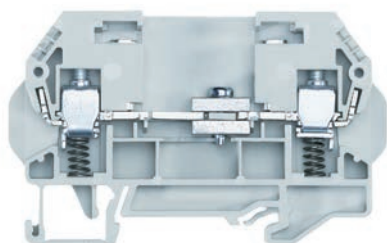


Description	Type	Part No.	Std. Pack
Measuring disconnect block	WKN6 TK SF	56.106.0755.0	50
Feed-through block	WKN6 TK SFD	56.106.0855.0	50
General data			
Width / length / height, incl. TS 7.5	8 mm / 73 mm / 58 mm		
Wire strip length	12 mm		
Approvals			
Technical data	IEC	EA TS 50-18	
	EN 60947-7-1		
Cross section fine-stranded	0.5–6 mm ²		
Cross section solid/stranded	0.5–10 mm ²		
Cross section, AWG			
Rated current	57 A	25 A	
Rated voltage	500 V	500 V	
Rated impulse voltage	6 kV		
Pollution degree	3		

Accessories for *selos* WKN 6 TK...

Accessories	Type	Part No.	Std. Pack
1. End plate 2 mm	APN 6 TK	07.313.1755.0	10
2. Partition	TW 6 TK	07.312.0453.0	10
3. Sliding short-circuit slide, insulated	2-pole	IVS WKN6 TK-2	Z7.282.7229.0
	3-pole	IVS WKN6 TK-3	Z7.282.7329.0
	4-pole	IVS WKN6 TK-4	Z7.282.7429.0
4. Cross connector with screws, insulated	2-pole	IVB WKN6 TK-2	Z7.282.6229.0
	3-pole	IVB WKN6 TK-3	Z7.282.6329.0
	4-pole	IVB WKN6 TK-4	Z7.282.6429.0
	5-pole	IVB WKN6 TK-5	Z7.282.6529.0
	6-pole	IVB WKN6 TK-6	Z7.282.6629.0
5. Test socket	gray	SBN 4 GRAU	Z5.511.3553.0
	violet	SBN 4 VIOLETT	Z5.511.3553.9
	green	SBN 4 GRÜN	Z5.511.3553.7
	yellow	SBN 4 GELB	Z5.511.3553.8
	blue	SBN 4 BLAU	Z5.511.3553.6
6. Disconnect locking device	SP WKN 6 TK	05.566.6855.9	50
Jumper comb for WKN 6 TK	2-pole	IVK WKN 6TK-2	Z7.255.8227.0
	3-pole	IVK WKN 6TK-3	Z7.255.8327.0
	4-pole	IVK WKN 6TK-4	Z7.255.8427.0
	5-pole	IVK WKN 6TK-5	Z7.255.8527.0
	6-pole	IVK WKN 6TK-6	Z7.255.8627.0

Measuring disconnect blocks with screw connection WK6 TK

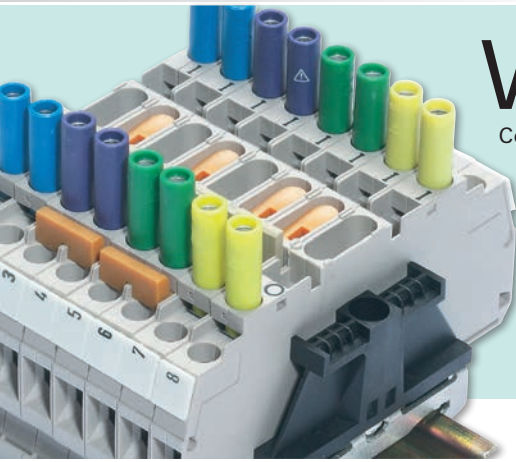


Wieland Electric's **selos** WK 6 TK block offers an optimal DIN rail block solution for all types of measuring circuits of current, voltage or energy. All circuits occurring during everyday practice can be implemented with the measuring disconnect block and a few accessories.

Complete insulated selectable connecting links are available as standard, as are insulated test sockets in all conventional signal colors. Two additional jumpering facilities permit the installation of fixed cross connections (e.g., for internal distribution of the k point of converter circuits). Standard cross connectors in a wide variety of numbers of pins are available for this purpose. The jumpers are easy to disconnect so that you can skip over blocks.

Technical data as per EN 60947-7:


Rated cross section:	6 mm ²	Rated current:	32 A
Rated voltage:	400 V	Connection capacity:	0.5-10 mm ²

Normal operation



Disconnect point closed
Short circuit contact open

Measured value test




Disconnect point open
Short circuit contact open

Current transformer short circuit




Disconnect point closed
Short circuit contact closed

Relay test




Disconnect point open
Short circuit contact closed

Accessories Pos.

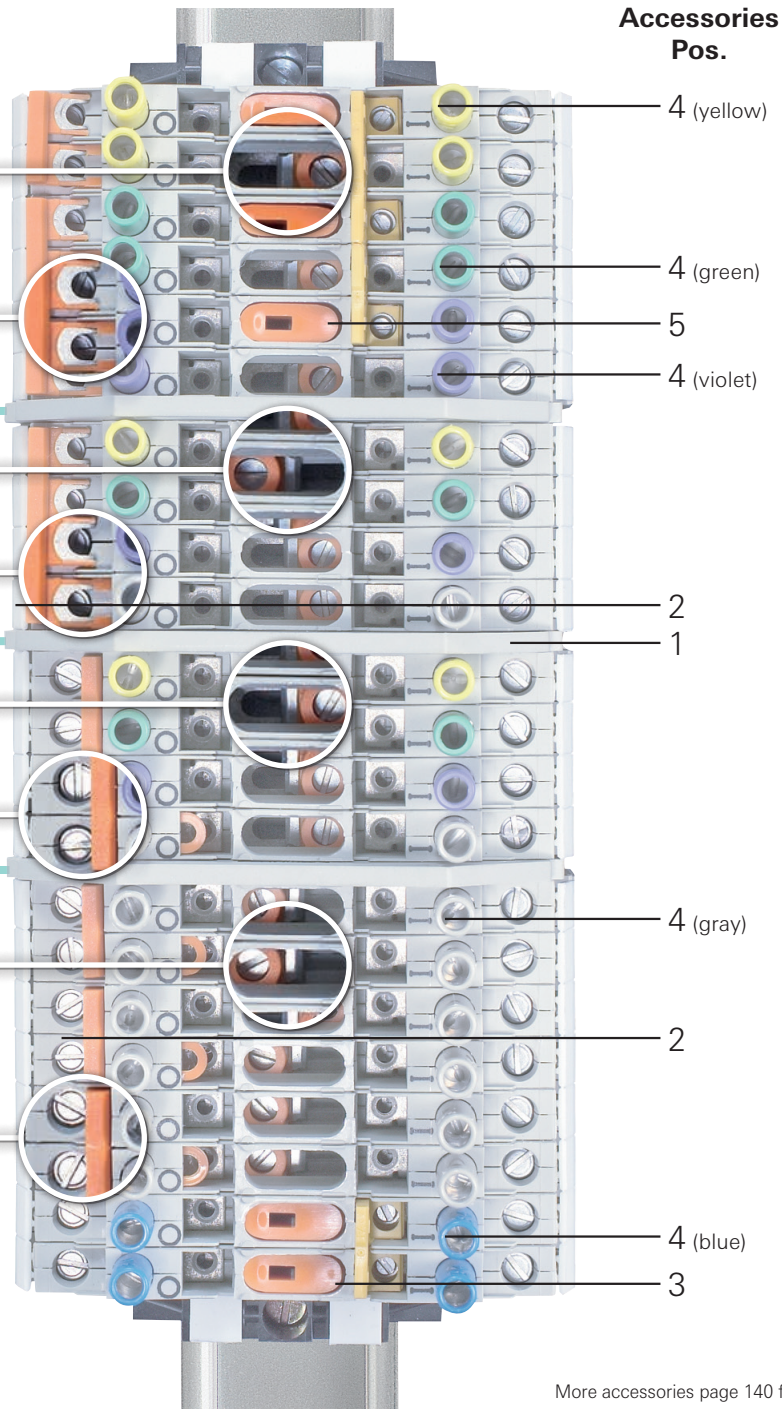

WK6 TK/35


- Measuring disconnect block for mounting on TS 35
- Nominal cross section 6 mm²

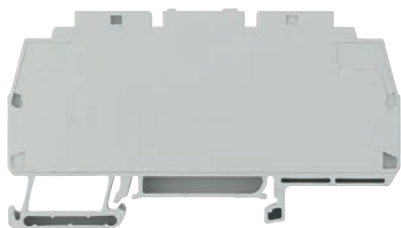

Description	Type	Part No.	Std. Pack
Measuring disconnect block	WK6 TK/35	56.106.0553.0	50
General data			
Width / length / height, incl. TS 7.5	8 mm / 87 mm / 49 mm		
Wire strip length	12 mm		
Approvals			
Technical data	IEC	UL	CSA
For use with insulating sleeves	EN 60947-7-1		
Cross section fine-stranded	0.5–6 mm ²		
Cross section solid/stranded	0.5–10 mm ²		
Cross section, AWG		20–8	20–8
Rated current	32 A	45 A	45 A
Rated voltage	400 V	600 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WK6 TK P3/35

- Measuring disconnect block with mounted test sockets for mounting on TS 35
- Nominal cross section 6 mm²

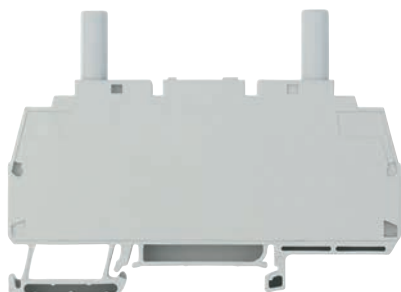

Description	Type	Part No.	Std. Pack
Measuring disconnect block	WK6 TK P3/35	56.106.0653.0	50
General data			
Width / length / height, incl. TS 7.5	8 mm / 87 mm / 62 mm		
Wire strip length	12 mm		
Approvals			
Technical data	IEC	UL	CSA
For use with insulating sleeves	EN 60947-7-1		
Cross section fine-stranded	0.5–6 mm ²		
Cross section solid/stranded	0.5–10 mm ²		
Cross section, AWG		20–8	20–8
Rated current	32 A	45 A	45 A
Rated voltage	400 V	600 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		


Accessories for selos WK6 TK.../35

Accessories	Type	Part No.	Std. Pack
1. Partition	TW 6 TK	07.312.0453.0	10
2. Sliding short-circuit slide, insulated	2-pole	IVS WK6 TK-2	27.212.2227.0
	3-pole	IVS WK6 TK-3	27.212.2327.0
	4-pole	IVS WK6 TK-4	27.212.2427.0
3. Cross connector with screws, insulated	2-pole	IVB WK6 TK-2	27.212.1227.0
	3-pole	IVB WK6 TK-3	27.212.1327.0
	4-pole	IVB WK6 TK-4	27.212.1427.0
	5-pole	IVB WK6 TK-5	27.212.1527.0
	10-pole	IVB WK6 TK-10	27.212.2027.0
4. Test socket	gray	SB 4 GRAU	05.511.2953.0
	violet	SB 4 VIOLETT	05.511.2953.9
	green	SB 4 GRÜN	05.511.2953.7
	yellow	SB 4 GELB	05.511.2953.8
5. Disconnect locking device	blue	SB 4 BLAU	05.511.2953.6
	SP WK6 TK	05.563.5453.0	50

Screw type terminal blocks with spring support

WKN 6 SF


- Feed-through block with spring support for mounting on TS 35 and TS 32
- Nominal cross section 6 mm²

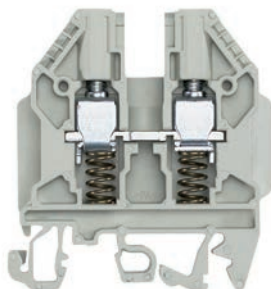

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKN 6 SF	57.506.0555.0	100
General data				
Width / length / height, incl. TS 7.5	8 mm / 54 mm / 57 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	EA TS 50-18		
	EN 60947-7-1			
Cross section fine-stranded	0.5–6 mm ²			
Cross section solid/stranded	0.5–10 mm ²			
Cross section, AWG				
Rated current	41 A	30 A		
Rated voltage	800 V	500 V		
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APN 6 SF	07.313.2355.0	10
Partition	gray	TW 6 TK	07.312.0453.0	10
Cross connector with screws	2-pole	IVB WK 6 - 2	Z7.282.2227.0	10
insulated	3-pole	IVB WK 6 - 3	Z7.282.2327.0	10
	up to 12-pole	IVB WK 6 - 12	Z7.282.3227.0	10
Single cover f. cross conn. with marking facility		AD VB 6 GELB	04.326.2253.8	10
Cover with warning symbol	yellow	AD VB 8/4 GELB	04.343.4956.8	10

WKN 10 SF

- Feed-through block with spring support for mounting on TS 35 and TS 32
- Nominal cross section 10 mm²

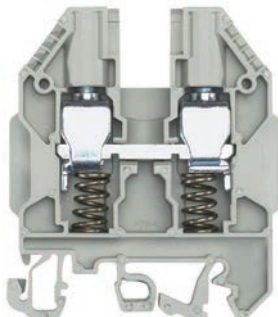


Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKN 10 SF	57.510.0555.0	100
General data				
Width / length / height, incl. TS 7.5	10 mm / 55 mm / 64 mm			
Wire strip length	13 mm			
Approvals				
Technical data	IEC	EA TS 50-18		
	EN 60947-7-1			
Cross section fine-stranded	2.5–10 mm ²			
Cross section solid/stranded	1.5–16 mm ²			
Cross section, AWG				
Rated current	57 A	30 A		
Rated voltage	800 V	500 V		
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APN 10 SF	07.313.2455.0	10
Partition	gray	TW 6 TK	07.312.0453.0	10
Cross connector with screws	2-pole	IVB WK 10 - 2	Z7.283.2227.0	10
insulated	3-pole	IVB WK 10 - 3	Z7.283.2327.0	10
	up to 12-pole	IVB WK 10 - 12	Z7.283.3227.0	10
Single cover f. cross conn. with marking facility		AD VB 10 GELB	04.326.2353.8	10
Cover with warning symbol	yellow	AD VB 10/4 GELB	04.343.5056.8	10

DIN rail terminal blocks with ring lug connection

WRT 6


- Feed-through block with ring lug connection for mounting on TS 35
- Nominal cross section 6 mm²

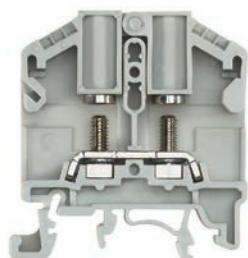

Description	Type	Part No.	Std. Pack
Feed-through block	gray WRT 6	57.106.1155.0	100
General data			
Width / length / height, incl. TS 7.5	11 mm / 49 mm / 51 mm		
Wire strip length	10 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	1.5–6 mm ²		
Cross section solid/stranded	1.5–6 mm ²		
Cross section, AWG	22–8		
Rated current	41 A	50 A	50 A
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray APRT 6	07.300.6955.0	10
Partition	gray TW 6 TK	07.312.0453.0	10
Cross connector, insulated	2-pole	IVB WRT 6 TK - 2	10
	3-pole	IVB WRT 6 TK - 3	10
	4-pole	IVB WRT 6 TK - 4	10

WRT 6 TK

- Measuring disconnect block with ring lug connection for mounting on TS 35
- Nominal cross section 6 mm²

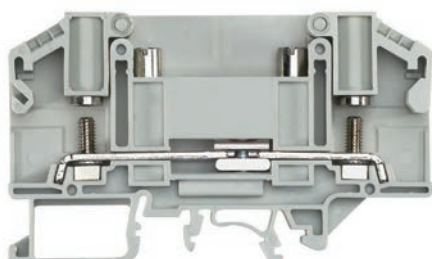

Description	Type	Part No.	Std. Pack
Measuring disconnect block	gray WRT 6 TK	57.106.1055.0	100
General data			
Width / length / height, incl. TS 7.5	11 mm / 86 mm / 51 mm		
Wire strip length	10 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	1.5–6 mm ²		
Cross section solid/stranded	1.5–6 mm ²		
Cross section, AWG	22–8		
Rated current	41 A	35 A	35 A
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray APRT 6 TK	07.300.7055.0	10
Partition	gray TW 6 TK	07.312.0453.0	10
Cross connector, insulated	2-pole	IVB WRT 6 TK - 2	10
	3-pole	IVB WRT 6 TK - 3	10
	4-pole	IVB WRT 6 TK - 4	10

DIN rail terminal block with double clamping screw

WKN 16 DS

- Feed-through block with double screw connection for mounting on TS 32 and 35
- Nominal cross section 16 mm²



Description	Type	Part No.	Std. Pack
Feed-through block	gray WKN 16 DS	57.016.5055.0	50
General data			
Width / length / height, incl. TS 7.5	10 mm / 68 mm / 54 mm		
Wire strip length	18 mm		
Approvals			
Technical data	IEC	CSA	
	EN 60947-7-1		
Cross section fine-stranded	1,5–16 mm ²		
Cross section solid/stranded	1,5–25 mm ²		
Cross section, AWG	16–6		
Rated current	76 A	65 A	
Rated voltage	800 V	600 V	
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray APN 16 DS	07.313.2255.0	10
Cross connector, insulated	2-pole	IVB WKN 10 - 2	10
	3-pole	IVB WKN 10 - 3	10
	12-pole	IVB WKN 10 - 12	10



selos WRT

The new generation of high current terminals

The **selos** WRT high current terminals are the new generation of ring lug terminals for safe and maintenance-free energy transmission.

A broad range and a clear focus on customer benefits makes **selos** WRT a robust solution for connecting conductors to 300 mm² and 520 A.

Features

- Rugged design
- Safe and maintenance-free
- Flexible potential distribution
- Reliable touch protection

Simple mounting

- On TS 35 or on the mounting plate
- Few parts – nut with integrated spring washer

Safe and maintenance-free


- High performance
- Up to 300 mm² / 520 A / 1000 V
- Maintenance-free screw connection
- Vibration-proof

Touch-proof application

- Cover easy to open and close
- Test opening – completely touch-proof voltage measurement
- Cover can be individually adapted

Flexible potential distribution

- Cross connectors for simple potential distribution up to nominal currents
- Multi-conductor connection possible, 2 cable lugs per connection point

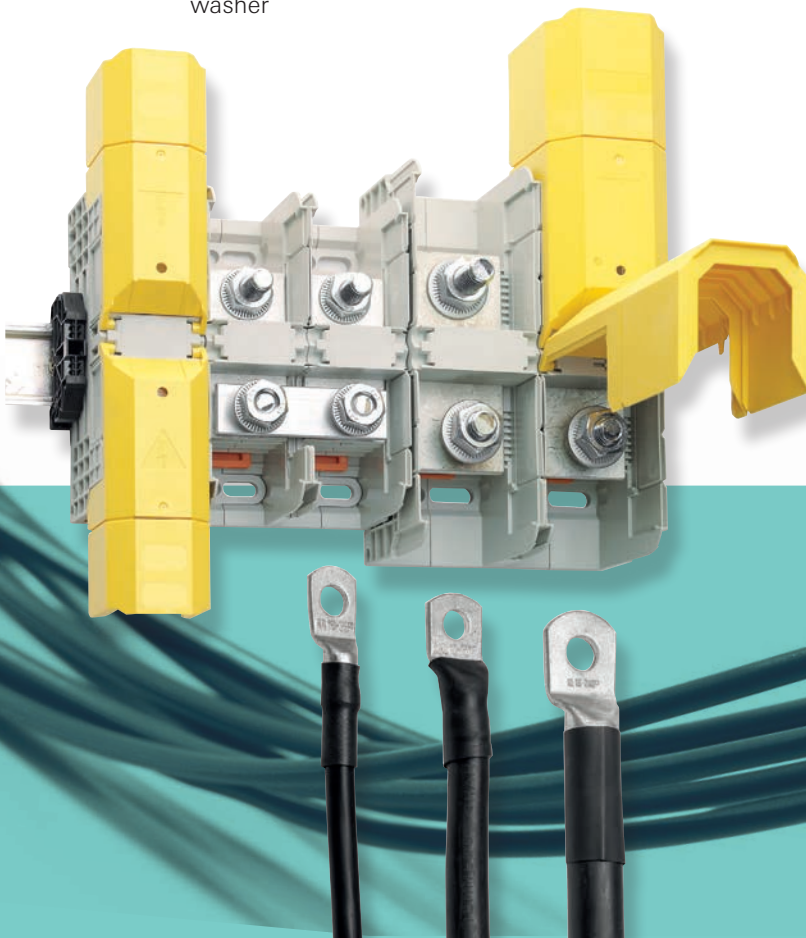

High current terminals with screw connection

WRT 35

- High current terminal block for mounting on TS 35
- Nominal cross-section 35 mm²
- Bolt connection M6



Description	Type	Part No.	Std. Pack
High current terminal block	WRT 35 / M6	56.135.1055.0	10
General data			
Width / length / height (incl. TS 7.5)	27 mm / 107 mm / 51 mm		
Width / length / height (incl. TS 7.5 & cover)	27 mm / 131 mm / 60 mm		
Screw size	M6		
Approvals			
Technical data			
Cross section fine-stranded	IEC	UL	CSA
	2.5 - 50 mm ²		
Cross section solid/stranded	2.5 - 50 mm ²		
Cross-section, AWG		14 - 1/0	14 - 1/0
Rated current	125 A	130 A	130 A
Rated voltage	1000 V	1000 V	1000 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Torque	3 - 6 Nm		
Description	Type	Part No.	Std. Pack
Accessories			
Cover (2 piece/terminal required)	AD WRT 35	07.431.7053.8	20
Cross connector, for 2 terminals	VB WRT 35-2	07.201.1227.6	5
Cross connector, for 3 terminals	VB WRT 35-3	07.201.1327.6	5

WRT 70

- High current terminal block for mounting on TS 35
- Nominal cross-section 70 mm²
- Bolt connection M8



Description	Type	Part No.	Std. Pack
High current terminal block	WRT 70	56.170.1055.0	10
General data			
Width / length / height (incl. TS 7.5)	32 mm / 132 mm / 61 mm		
Width / length / height (incl. TS 7.5 & cover)	32 mm / 180 mm / 70 mm		
Screw size	M8		
Approvals			
Technical data			
Cross section fine-stranded	IEC	UL	CSA
	2.5 - 95 mm ²		
Cross section solid/stranded	2.5 - 95 mm ²		
Cross-section, AWG		14 - 3/0	14 - 3/0
Rated current	192 A	175 A	175 A
Rated voltage	1000 V	1000 V	1000 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Torque	6 - 12 Nm		
Description	Type	Part No.	Std. Pack
Accessories			
Cover (2 piece/terminal required)	AD WRT 70	07.431.7153.8	20
Cross connector, for 2 terminals	VB WRT 70-2	07.201.3227.6	5
Cross connector, for 3 terminals	VB WRT 70-3	07.201.3327.6	5

WRT 120

- High current terminal block for mounting on TS 35
- Nominal cross-section 120 mm²
- Bolt connection M10



Description	Type	Part No.	Std. Pack
High current terminal block	WRT 120	56.197.1055.0	5
General data			
Width / length / height (incl. TS 7.5)	42 mm / 133 mm / 72 mm		
Width / length / height (incl. TS 7.5 & cover)	42 mm / 226 mm / 80 mm		
Screw size	M10		
Approvals			
Technical data			
Cross section fine-stranded	IEC	UL	CSA
	to 120 mm ²		
Cross section solid/stranded	6 - 150 mm ²		
Cross-section, AWG		10 - 250 kcmil	10 - 250 kcmil
Rated current	269 A	225/310 A *)	225/310 A *)
Rated voltage	1000 V	1000 V	1000 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Torque	10 - 20 Nm		
Description	Type	Part No.	Std. Pack
Accessories			
Cover (2 piece/terminal required)	AD WRT 120	07.431.7253.8	10
Cross connector, for 2 terminals	VB WRT 120-2	07.201.5227.6	5
Cross connector, for 3 terminals	VB WRT 120-3	07.201.5327.6	5

*) field/factory wiring

WRT 185

- High current terminal block for mounting on TS 35
- Nominal cross-section 185 mm²
- Bolt connection M12



Description	Type	Part No.	Std. Pack
High current terminal block	WRT 185	56.198.1055.0	5

General data			
Width / length / height (incl. TS 7.5)	55 mm / 164 mm / 78 mm		
Width / length / height (incl. TS 7.5 & cover)	55 mm / 288 mm / 90 mm		
Screw size	M12		
Approvals			
Technical data			
Cross section fine-stranded	IEC	UL	CSA
	to 185 mm ²		
Cross section solid/stranded	10 - 240 mm ²		
Cross-section, AWG		8 - 500 kcmil	8 - 500 kcmil
Rated current	353 A	380 A	380 A
Rated voltage	1000 V	1000 V	1000 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Torque	14 - 31 Nm		

Description	Type	Part No.	Std. Pack
Accessories			
Cover (2 piece/terminal required)	AD WRT 185/300	07.431.7353.8	10
Cross connector, for 2 terminals	VB WRT 185-2	07.201.7227.6	5
Cross connector, for 3 terminals	VB WRT 185-3	07.201.7327.6	5

WRT 300

- High current terminal block for mounting on TS 35
- Nominal cross-section 300 mm²
- Bolt connection M16



Description	Type	Part No.	Std. Pack
High current terminal block	WRT 300	56.199.1055.0	5


General data			
Width / length / height (incl. TS 7.5)	55 mm / 164 mm / 78 mm		
Width / length / height (incl. TS 7.5 & cover)	55 mm / 288 mm / 90 mm		
Screw size	M16		
Approvals			
Technical data			
Cross section fine-stranded	IEC	UL	CSA
	to 300 mm ²		
Cross section solid/stranded	25 - 240 mm ²		
Cross-section, AWG		6 - 600 kcmil	6 - 600 kcmil
Rated current	520 A	420/510 A *)	420/510 A *)
Rated voltage	1000 V	1000 V	1000 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Torque	25 - 60 Nm		

Description	Type	Part No.	Std. Pack
Accessories			
Cover (2 piece/terminal required)	AD WRT 185/300	07.431.7353.8	10
Cross connector, for 2 terminals	VB WRT 300-2	07.201.9227.6	5
Cross connector, for 3 terminals	VB WRT 300-3	07.201.9327.6	5

*) field/factory wiring

selos POWER LINE

High current terminal blocks with screw connection

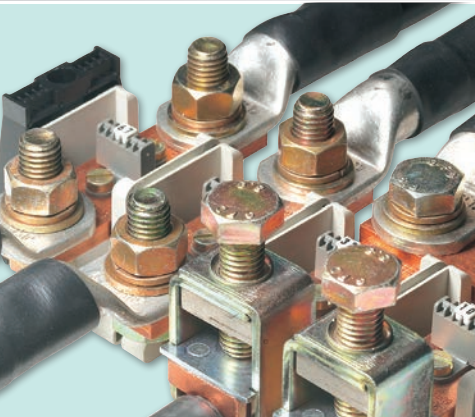

Selos POWER LINE is designed for use in mechanical and plant engineering, railway, and battery applications.


Wieland offers a program which was especially developed for high current applications. The portfolio includes feed through blocks and ring lug terminals. The RFK type feed through blocks include four different cross sections between 95 and 240 mm² with different types of connection (e.g., rising cage or ring lug connection).

Ring lug terminals augment the **selos** POWER LINE product line. Blocks with ring lug sizes from M 6 to M 12 are available for the connection of wires with crimped cable lugs.

Extensive accessories optimize the **selos** POWER LINE for a wide variety of applications.


Technical data as per EN 60947-7:

Rated cross section:	95 mm ² - 240 mm ²	Rated current: up to 415 A
Rated voltage:	1000V	

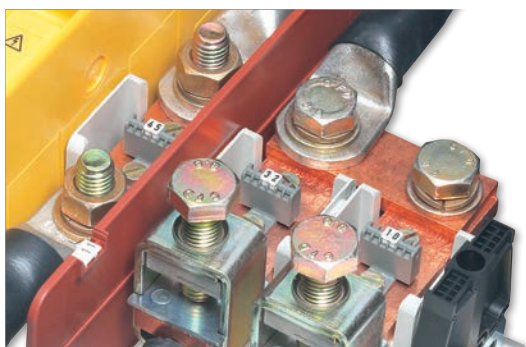

High current blocks, type RFK

- Up to 240 mm² rated cross section
- Cable connection via ring lug connection technology, direct connection with rising cage or hybrid solutions
- Current carrying and cross connectors made of E-Cu
- Screws maintain torque via clamping body design, as well as lock washers

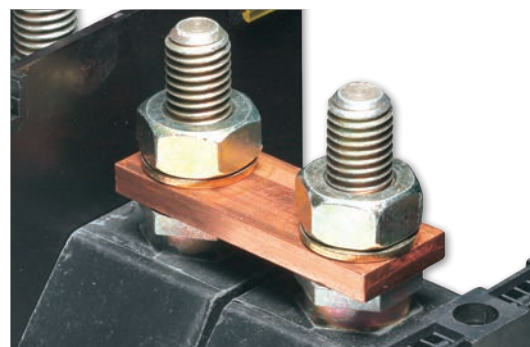


Ring lug connection blocks

- For the connection of cable lugs in versions from M 6 to M 12
- Screws maintain torque via lock washers
- Approved for international rail transportation standards



Accessories for **selos** POWER

- Covers for provision of protection against accidental touch
- Cross connectors made of E-Cu; 2, 3 and 4-pole
- Partition plates for visual and electrical separation
- All components can be marked with the standard Wieland marking system

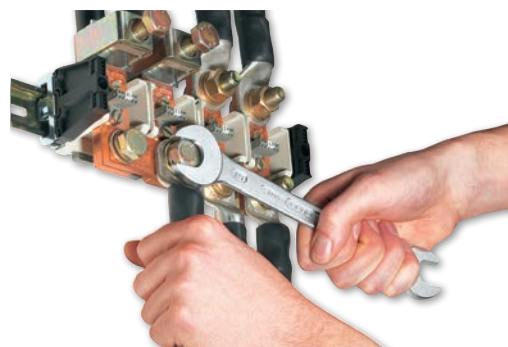


Mounting notice

- When tightening the block screws, we recommend countering by holding the wire to avoid deformation of the mounting rail and to keep the foot of the block free of torsional forces.

BK M .../35

- Ring lug terminal for mounting on TS 35



Description	Type	Part No.	Std. Pack
Ring lug terminal	BK M 6/35	32.530.0053.0	25
	BK M 8/35	32.540.0053.0	25
	BK M 10/35	32.550.0053.0	25
	BK M 12/35	32.560.0053.0	25


General data				
Approvals				
Technical data	BK M 6	BK M 8	BK M 10	BK M 12
Width / height	19 x 56	24 x 65	35 x 72	35 x 74
Rated current	125 A	150 A	265 A	265 A
Rated voltage	1000 V / 8 kV / 3 with partition TW BK			

Accessories		Type	Part No.	Std. Pack
Partition	for BK M 6	TW BK M 6/35	07.340.3553.0	25
	for BK M 8	TW BK M 8/35	07.340.3653.0	25
	for BK M 10	TW BK M 10-12/35	07.340.3753.0	25
	for BK M 12	TW BK M 10-12/35	07.340.3753.0	25
Cross connector for tab connection blocks, from E-Cu	for 2 blocks BK M 6	VB BK M 6/35-2	07.205.5227.0	20
	for 3 blocks BK M 6	VB BK M 6/35-3	07.205.5327.0	10
	for 2 blocks BK M 8	VB BK M 8/35-2	07.205.7227.0	20
	for 3 blocks BK M 8	VB BK M 8/35-3	07.205.7327.0	10
	for 2 blocks BK M 10	VB BK M 10/35-2	07.205.8227.0	20
	for 3 blocks BK M 10	VB BK M 10/35-3	07.205.8327.0	10
	for 2 blocks BK M 12	VB BK M 12/35-2	07.205.9227.0	20
	for 3 blocks BK M 12	VB BK M 12/35-3	07.205.9327.0	10
	Cover	for BK M 6	AD BK M 6-8/35	04.304.0181.0
for BK M 8		AD BK M 6-8/35	04.304.0181.0	1
for BK M 10		AD BK M 10-12/35	04.304.0281.0	1
for BK M 12		AD BK M 10-12/35	04.304.0281.0	1
Installation clip for cover		05.564.0753.0	10	

High current blocks with screw connection

RFK 1/95... S35

- High current block for mounting on TS 35
- Nominal cross section 95 mm²

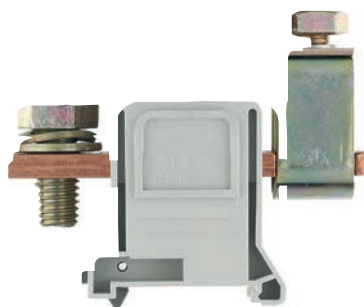

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	F RFK 1/95 F S 35	56.395.0055.0	10
		K RFK 1/95 K S 35	56.395.0155.0	10
		FK RFK 1/95 FK S 35	56.395.0255.0	10
		FM RFK 1/95 FM S 35	56.395.1055.0	10
		FMK RFK 1/95 FMK S 35	56.395.1255.0	10

General data


Width / length / height, incl. TS 7.5	see list p. 53		
Wire strip length	27 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	16–95 mm ²		
Cross section solid/stranded	16–95 mm ²		
Cross section, AWG		6–3/0	6–3/0
Rated current	250 A	200 A	200 A
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories

Description	Type	Part No.	Std. Pack	
Cover for RFK 1/...	yellow	AD RFK 95	27.409.5753.0	10
Partition/end plate	2.8mm thick	TE/RFK 1/95	07.340.0353.0	50
Cross connector, for 2 blocks		VB RFK 1/95/2/32	07.205.1227.0	20
from E-Cu for 3 blocks		VB RFK 1/95/3/32	07.205.1327.0	10
for 4 blocks		VB RFK 1/95/4/32	07.205.1427.0	10

RFK 1/150... S35

- High current block for mounting on TS 35
- Nominal cross section 150 mm²

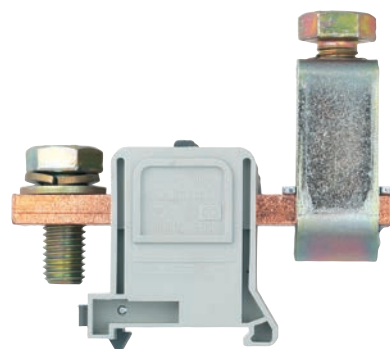

Description	Type	Part No.	Std. Pack	
Feed-through block	gray	F RFK 1/150 F S35	56.397.0055.0	10
		K RFK 1/150 K S35	56.397.0155.0	10
		FK RFK 1/150 FK S35	56.397.0255.0	10
		FMK RFK 1/150 FMK S35	56.397.1255.0	10

General data


Width / length / height, incl. TS 7.5	see list p. 53		
Wire strip length	27 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	70–150 mm ²		
Cross section solid/stranded	70–150 mm ²		
Cross section, AWG		0 - 300 kcmil	0 - 300 kcmil
Rated current	335 A	275 A	300 A
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories

Description	Type	Part No.	Std. Pack	
Cover for RFK 1/...	yellow	AD RFK 150 - 240	27.409.5853.0	10
Partition/end plate	2.8mm thick	TE/RFK 1/150 - 240 PA	07.340.1053.0	50
Cross connector, for 2 blocks		VB RFK 1/185/2	07.201.4227.0	10
from E-Cu for 3 blocks		VB RFK 1/185/3	07.201.4327.0	10
for 4 blocks		VB RFK 1/185/4	07.201.4427.0	10

RFK 1/185... S35

- High current block for mounting on TS 35
- Nominal cross section 185 mm²

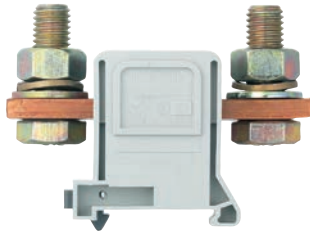


Description	Type	Part No.	Std. Pack
Feed-through block	gray F	RFK 1/185 F S 35	56.398.0055.0
	FM	RFK 1/185 FM S 35	56.398.1055.0

General data			
Width / length / height, incl. TS 7.5	see list		
Wire strip length	27 mm		
Approvals			
Technical data	IEC	UL	CSA
For use with insulating sleeves	EN 60947-7-1		
Cross section fine-stranded	70–200 mm ²		
Cross section solid/stranded	70–200 mm ²		
Cross section, AWG		0 - 400 kcmil	0 - 400 kcmil
Rated current	353 A	375 A	375 A
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories			
Cover for RFK 1/..., yellow	Type	Part No.	Std. Pack
	AD RFK 150 - 240	27.409.5853.0	10
Partition/end plate	2.8 mm thick	TE/RFK 1/150 - 240 PA	07.340.1053.0
Cross connector,	for 2 blocks	VB RFK 1/185/2	07.201.4227.0
from E-Cu	for 3 blocks	VB RFK 1/185/3	07.201.4327.0
	for 4 blocks	VB RFK 1/185/4	07.201.4427.0

RFK 1/240... S35

- High current block for mounting on TS 35
- Nominal cross section 240 mm²
- *) Use only cable lugs type DIN 46234

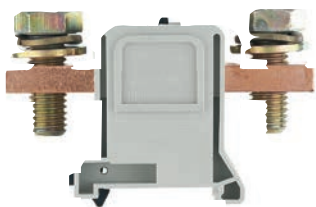


Description	Type	Part No.	Std. Pack
Feed-through block	gray F	RFK 1/240 F S 35*)	56.399.0055.0
	K	RFK 1/240 K S 35	56.399.0155.0
	FK	RFK 1/240 FK S 35*)	56.399.0255.0
	FM	RFK 1/240 FM S 35*)	56.399.1055.0
	FMK	RFK 1/240 FMK S 35*)	56.399.1255.0

General data			
Width / length / height, incl. TS 7.5	see list		
Wire strip length	27 mm		
Approvals			
Technical data	IEC	UL	CSA
For use with insulating sleeves	EN 60947-7-1		
Cross section fine-stranded	70–240 mm ²		
Cross section solid/stranded	70–240 mm ²		
Cross section, AWG		0 - 500 kcmil	3/0 - 500 kcmil
Rated current	415 A	375 A	425 A
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories			
Cover for RFK 1/...	Type	Part No.	Std. Pack
	yellow	AD RFK 150 - 240	27.409.5853.0
Partition/end plate	2.8 mm thick	TE/RFK 1/150 - 240 PA	07.340.1053.0
Cross connector,	for 2 blocks	VB RFK 1/240/2	07.201.8227.0
from E-Cu	for 3 blocks	VB RFK 1/240/3	07.201.8327.0
	for 4 blocks	VB RFK 1/240/4	07.201.8427.0


Configurations

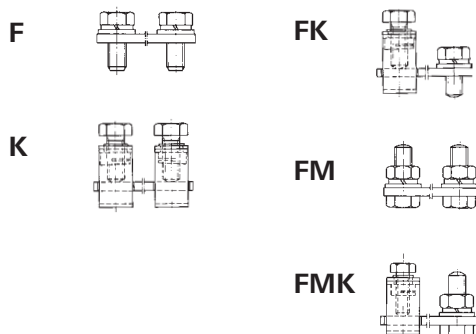




mm ²	Type	Screw	Width mm	Length mm	Height, incl. TS 7.5 mm
95	F	M10	32	92	55
	FM	M10	32	92	65
	K, FK, FMK	M10	32	92	78
150	F	M12	42	92	55
	K, FK, FMK	M12	42	92	78
185	F	M12	42	92	55
	FM	M12	42	92	70
240	F	M12	42	92	55
	FM	M12	42	92	77
	K, FK, FMK	M12	42	92	93

Mini blocks with screw connection for TS 15


WKM 2,5/15


- Feed-through block for mounting on TS 15
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170





Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKM 2,5/15	55.503.1053.0 100
Feed-through block	blue	WKM 2,5/15 BLAU	55.503.1053.6 100
General data			
Width / length / height, incl. TS 7.5	5 mm / 32 mm / 32 mm		
Wire strip length	9 mm		
Approvals	 KEMA 02 ATEX 2114 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-1		EN 60 079-0/-7
Cross section fine-stranded	0.5 – 2.5 mm ²		0.5 – 2.5 mm ²
Cross section solid/stranded	0.5 – 4 mm ²		0.5 – 4 mm ²
Cross section, AWG	22 – 14	24 – 12	
Rated current	25 A	10 A	20 A
Rated voltage	500 V	300 V	600 V
Rated impulse voltage	6 kV		275 V
Pollution degree	3		
Accessories			
End plate	gray	APM 2,5 - 4/15	07.311.0853.0 10
	blue	APM 2,5 - 4/15 BLAU	07.311.0853.6 10
Partition	gray	TWM 2,5 - 4/15	07.311.1853.0 10
Cross connector with screws, E-Cu	2-pole	VB WKM 2,5/15-2	27.215.4227.0 50
	3-pole	VB WKM 2,5/15-3	27.215.4327.0 50
	up to 6-pole	VB WKM 2,5/15-6	27.215.4627.0 50
	60-pole	VB WKM 2,5/15 M60	27.215.4027.0 10
Single cover f. cross conn. with marking facility		AD VB 2,5/15 GELB	04.326.3053.8 10
Partition plate with marking facility		TSM 2,5/15	07.311.2853.8 10


WKM 4/15

- Feed-through block for mounting on TS 15
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170
- ²⁾ with/without jumper





Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKM 4/15	55.504.1053.0 100
Feed-through block	blue	WKM 4/15 BLAU	55.504.1053.6 100
General data			
Width / length / height, incl. TS 7.5	6 mm / 32 mm / 32 mm		
Wire strip length	9 mm		
Approvals	 KEMA 02 ATEX 2114 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-1		EN 60 079-0/-7
Cross section fine-stranded	0.5 – 4 mm ²		0.5 – 4 mm ²
Cross section solid/stranded	0.5 – 6 mm ²		0.5 – 6 mm ²
Cross section, AWG	22 – 10	20 – 10	
Rated current	28 A	30 A	21/27 A ²⁾
Rated voltage	500 V	600 V	600 V
Rated impulse voltage	6 kV		275 V
Pollution degree	3		
Accessories			
End plate	gray	APM 2,5 - 4/15	07.311.0853.0 10
	blue	APM 2,5 - 4/15 BLAU	07.311.0853.6 10
Partition	gray	TWM 2,5 - 4/15	07.311.1853.0 10
Cross connector with screws, E-Cu	2-pole	IVB WK 4 E/U-2	27.271.2227.0 10
	3-pole	IVB WK 4 E/U-3	27.271.2327.0 10
	up to 12-pole	IVB WK 4 E/U-12	27.271.3227.0 10
Single cover f. cross conn. with marking facility		AD VB 4/15 GELB	04.326.2953.8 10
Partition plate with marking facility		TSM 4/15	07.311.2953.8 10

WKM 4 SL/15


- Ground block for mounting on TS 15
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack
Ground block	green/yellow	WKM 4 SL/15	55.504.9153.0 100
General data			
Width / length / height, incl. TS 7.5	6 mm / 32 mm / 32 mm		
Wire strip length	9 mm		
Approvals	 KEMA 02 ATEX 2114 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	0.5 – 4 mm ²		0.5 – 4 mm ²
Cross section solid/stranded	0.5 – 6 mm ²		0.5 – 6 mm ²
Cross section, AWG	22 – 14	22 – 10	
Rated current	30 A		
Rated voltage	500 V	300 V	
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	Type	Part No.	Std. Pack
	APM 4 SL/15	07.311.0753.0	10

WKM 2,5 F1/15


- Feed-through block with solder connection for mounting on TS 15
- Nominal cross section 2.5 mm²
- The terminal blocks of series WKM 2,5 F1/15 and WKM 2,5 F2/15 must be mounted alternately in order to maintain the required air and creepage distances for the indicated rated voltage.

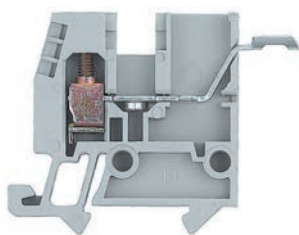


Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKM 2,5 F1/15	55.503.1253.0
General data			
Width / length / height, incl. TS 7.5	5 mm / 32 mm / 32 mm		
Wire strip length	9 mm		
Approvals	△		
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.5–2.5 mm ²		
Cross section solid/stranded	0.5–4 mm ²		
Cross section, AWG			
Rated current	24 A		
Rated voltage	500 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	gray	APM 2,5 F./15	07.311.0653.0
Cross connector with screws,	2-pole	VB WKM 2,5/15-2	Z7.215.4227.0
E-Cu	3-pole	VB WKM 2,5/15-3	Z7.215.4327.0
	up to 6-pole	VB WKM 2,5/15-6	Z7.215.4627.0
	60-pole	VB WKM 2,5/15 M60	Z7.215.4027.0
Single cover f. cross conn. with marking facility		AD VB 2,5/15 GELB	04.326.3053.8
Partition plate with marking facility	yellow	TSM 2,5/15	07.311.2853.8

WKM 2,5 F2/15

- Feed-through block solder connection for mounting on TS 15
- Nominal cross section 2.5 mm²
- The terminal blocks of series WKM 2,5 F1/15 and WKM 2,5 F2/15 must be mounted alternately in order to maintain the required air and creepage distances for the indicated rated voltage.

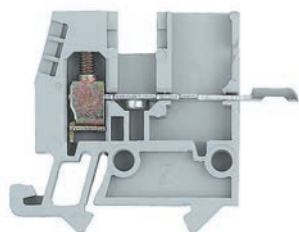

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKM 2,5 F2/15	55.503.1353.0
General data			
Width / length / height, incl. TS 7.5	5 mm / 32 mm / 32 mm		
Wire strip length	9 mm		
Approvals	△		
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.5–2.5 mm ²		
Cross section solid/stranded	0.5–4 mm ²		
Cross section, AWG			
Rated current	24 A		
Rated voltage	500 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	gray	APM 2,5 F./15	07.311.0653.0
Cross connector with screws,	2-pole	VB WKM 2,5/15-2	Z7.215.4227.0
E-Cu	3-pole	VB WKM 2,5/15-3	Z7.215.4327.0
	up to 6-pole	VB WKM 2,5/15-6	Z7.215.4627.0
	60-pole	VB WKM 2,5/15 M60	Z7.215.4027.0
Single cover f. cross conn. with marking facility		AD VB 2,5/15 GELB	04.326.3053.8
Partition plate with marking facility	yellow	TSM 2,5/15	07.311.2853.8


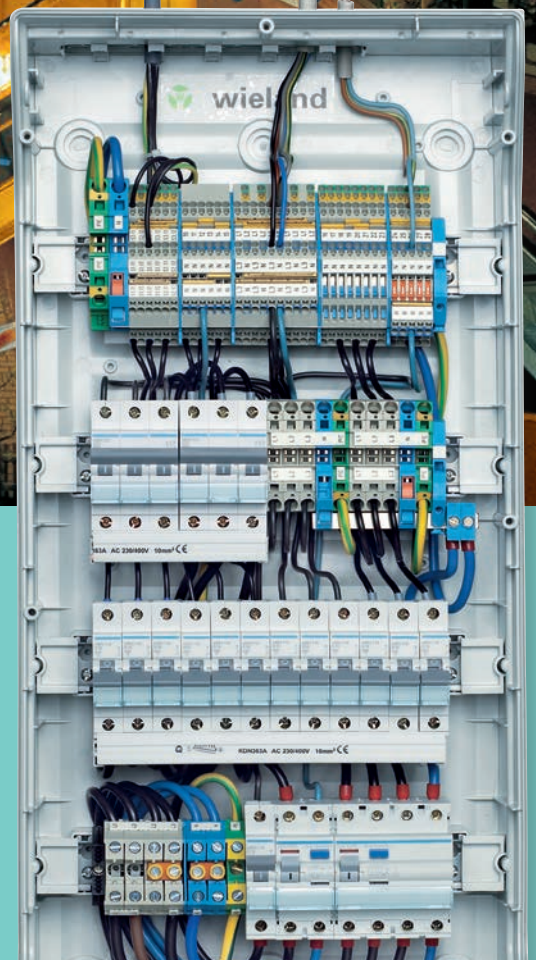


selos BIT

Terminal blocks for electrical installations with screw connection


Reliable connection, proven concept! **selos** – these are terminal blocks with screw connection, solid and functional, known worldwide, and used millions of times over.

The **selos** series combines the advantages of the classic screw connection with modern connection technology, with the focus on customer benefits and increased efficiency in wiring and logistics.

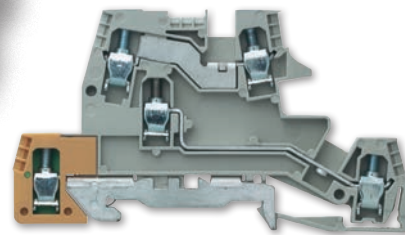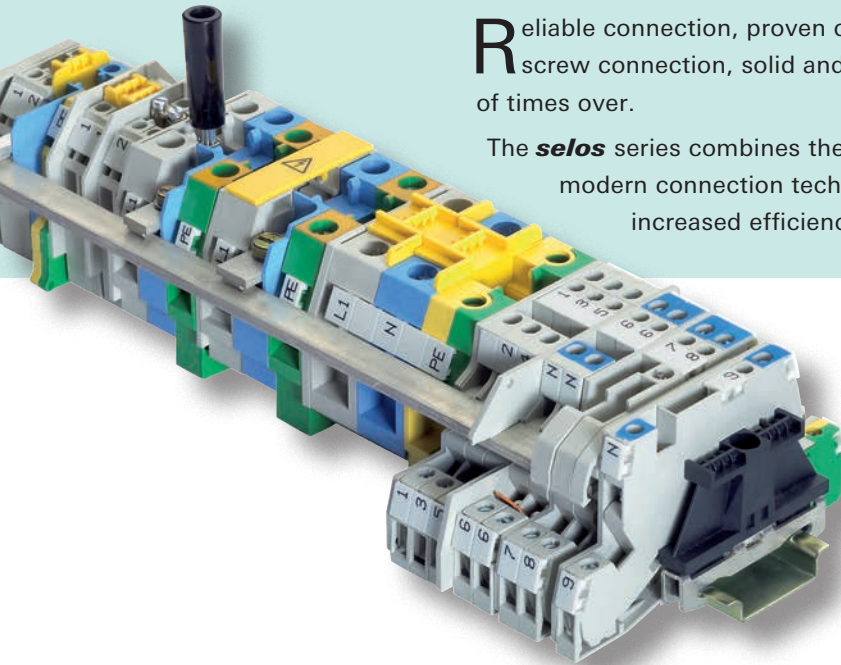


Space-saving wiring

- Clear wiring and assignment of electrical circuits through three-tier design in 6 mm assembly width
- Neutral conductor, phase feed-through, and ground connection in just one terminal
- Safety and convenience through switchable N disconnect function

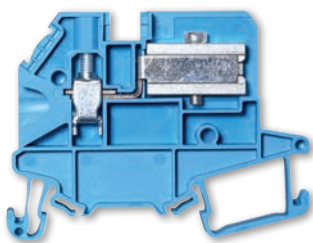

Safe and maintenance-free connection

- Stable terminal body design with single-part thread
- Multi-wire connection
- Connect with and without wire end ferrule
- Safety and operating convenience even with N-separation using screwable slide-gate valve

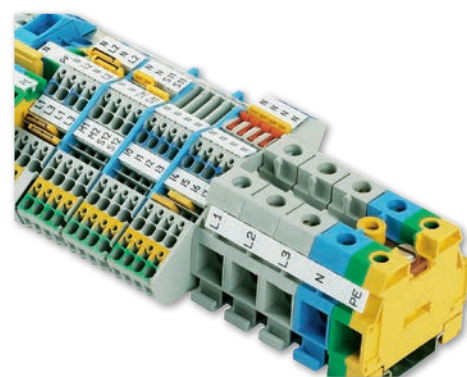


Combinable in the system

- Problem-free combination of installation terminals with other Wieland terminal blocks, also with different connection equipment
- For example:
 - Circuit wiring with compact spring-force device **fasis** BIT
 - Power feed with proven **selos** screws
- Low storage and logistics expense due to uniform accessories

Neutral disconnect terminals for installation distribution boards with screw connection

WT 4 NT


- Neutral disconnect block with screw connection for mounting on TS 35
- Nominal cross section 4 mm²

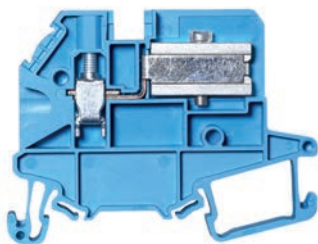

Description	Type	Part.No.	Std. Pack
Neutral disconnect terminal	blue WT 4 NT	58.504.6155.0	100
General data			
Width / length / height, incl. TS 7.5	6 mm / 62.6 mm / 48.6 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	0.14-6 mm ²		
Cross section solid/stranded	0.14-6 mm ²		
Cross-section, AWG			
Rated current	32 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	AP WT 4 NT	07.313.4355.0	1
Busbar	9813 M 10X 3 1000MM	98.290.0000.0	1
	9813 M SN 10X3 1000MM	98.290.1000.0	1
Connection clamp for busbar	WAK16/2 BL/V0	30.494.3021.6	100
Connection clamp for busbar	WAK35/2 BL/V0	30.494.4021.6	100
Connection clamp for busbar	WAK35/2	30.494.4121.0	50

WKI 10 ETK


- Neutral disconnect block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 10 mm²

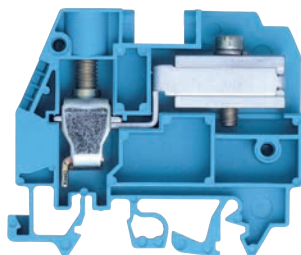

Description	Type	Part.No.	Std. Pack
Neutral disconnect terminal	blue WKI 10 ETK/U/V0	57.510.8255.0	50
General data			
Width / length / height, incl. TS 7.5	10 mm / 58 mm / 51.5 mm		
Wire strip length	13 mm		
Approvals	☉		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	1-10 mm ²		
Cross section solid/stranded	1-16 mm ²		
Cross-section, AWG	16-6 AWG		
Rated current	45 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	API 10-16 ETK/1/V0	07.312.1955.0	10
Busbar	9813 M 10X 3 1000MM	98.290.0000.0	1
	9813 M SN 10X3 1000MM	98.290.1000.0	1
Connection clamp for busbar	WAK16/2 BL/V0	30.494.3021.6	100
Connection clamp for busbar	WAK35/2 BL/V0	30.494.4021.6	100
Connection clamp for busbar	WAK35/2	30.494.4121.0	50

WKI 16 ETK

- Neutral disconnect block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 16 mm²

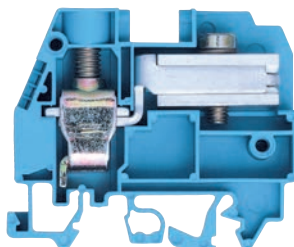


Description	Type	Part.No.	Std. Pack
Neutral disconnect terminal	blue WKI 16 ETK/U/V0	57.516.8255.0	50
General data			
Width / length / height, incl. TS 7.5	12 mm / 58 mm / 51.5 mm		
Wire strip length	15 mm		
Approvals	☉		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	1-16 mm ²		
Cross section solid/stranded	1-25 mm ²		
Cross-section, AWG	14-4 AWG		
Rated current	62 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	API 10-16 ETK/1/V0	07.312.1955.0	10
Busbar	9813 M 10X 3 1000MM	98.290.0000.0	1
	9813 M SN 10X3 1000MM	98.290.1000.0	1
Connection clamp for busbar	WAK16/2 BL/V0	30.494.3021.6	100
Connection clamp for busbar	WAK35/2 BL/V0	30.494.4021.6	100
Connection clamp for busbar	WAK35/2	30.494.4121.0	50

Terminal blocks for installation distribution boards in compact design

WKI 10


- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 10 mm²

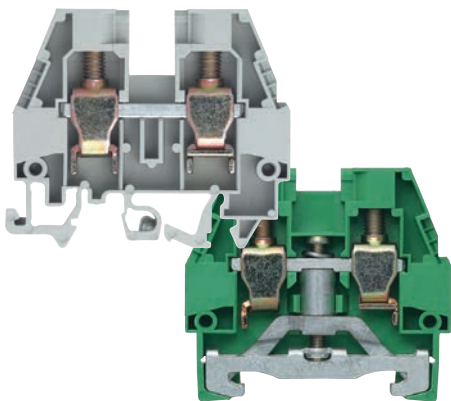

Description	Type	Part.No.	Std. Pack	
Feed-through terminal	gray	WKI 10 / U/V0	57.510.1155.0	50
	blue	WKI 10 / U BLAU/V0	57.510.1155.6	50
Feed-through terminal block	green/yellow	WKI 10 SL / 35/V0	56.510.9255.0	50
General data				
Width / length / height, incl. TS 7.5	10 mm / 58 mm / 51,5 mm			
Wire strip length	18 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	1-10 mm ²			
Cross section solid/stranded	1.5-16 mm ²			
Cross-section, AWG		16-6 AWG	16-6 AWG	
Rated current	57 A	65 A	70 A	
Rated voltage	400 V	600 V	600 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	Type	Part.No.	Std. Pack	
	API 10 - 16/V0	07.311.9455.0	10	
Insulated jumper bar	2-pole	IVBWKI10 - 2	Z7.283.2227.0	10
	3-pole	IVBWKI10 - 3	Z7.283.2327.0	10
	4-pole	IVBWKI10 - 4	Z7.283.2427.0	10
	5-pole	IVBWKI10 - 5	Z7.283.2527.0	10

WKI 16


- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 16 mm²

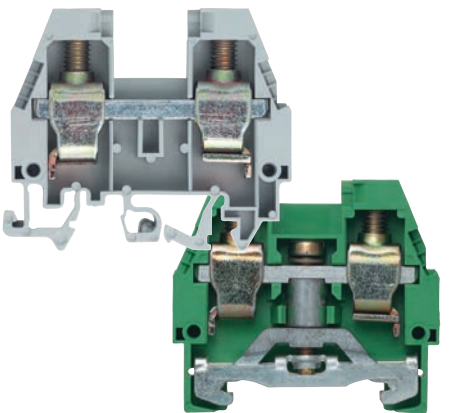

Description	Type	Part.No.	Std. Pack	
Feed-through terminal	gray	WKI 16 / U/V0	57.516.1155.0	50
	blue	WKI 16 / U BLAU/V0	57.516.1155.6	50
Feed-through terminal block	green/yellow	WKI 16 SL / 35/V0	56.516.9255.0	50
General data				
Width / length / height, incl. TS 7.5	12 mm / 58 mm / 51,5 mm			
Wire strip length	16 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	1-16 mm ²			
Cross section solid/stranded	1.5-25 mm ²			
Cross-section, AWG		12-4 AWG	14-4 AWG	
Rated current	76 A	65 / 90 A	95 A	
Rated voltage	400 V	600 V	600 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	Type	Part.No.	Std. Pack	
	API 10 - 16/V0	07.311.9455.0	10	
Insulated jumper bar	2-pole	IVB WKI16- 2	Z7.284.9227.0	10
	3-pole	IVB WKI16- 3	Z7.284.9327.0	10
	4-pole	IVB WKI16- 4	Z7.284.9427.0	10
	5-pole	IVB WKI16- 5	Z7.284.9527.0	10

WKI 35

- Feed-through block with screw connection for mounting on TS 35 and TS 32
- Nominal cross section 35 mm²

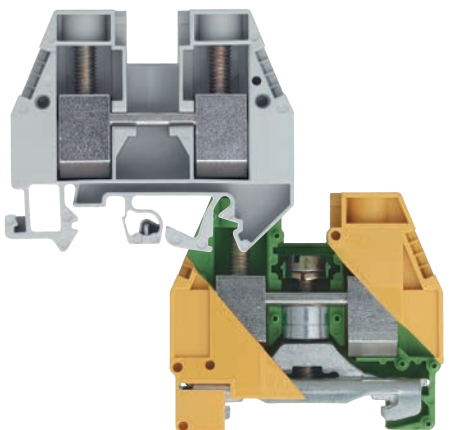


Description	Type	Part.No.	Std. Pack	
Feed-through terminal	gray	WKI 35 / U/V0	57.535.1155.0	20
	blue	WKI 35 / U BLAU/V0	57.535.1155.6	20
Feed-through terminal block	green/yellow	WKI 35 SL / 35/V0	56.535.9255.0	20
General data				
Width / length / height, incl. TS 7.5	16 mm / 58 mm / 51,5 mm			
Wire strip length	13 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	6-35 mm ²			
Cross section solid/stranded	6-50 mm ²			
Cross-section, AWG		10-2 AWG	10-2 AWG	
Rated current	125 A	95 A	110 A	
Rated voltage	400 V	600 V	600 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	Type	Part.No.	Std. Pack	
	API 35/V0	07.311.8855.0	10	
Insulated jumper bar	2-pole	IVBWKI35 - 2	Z7.285.4227.0	5
	3-pole	IVBWKI35 - 3	Z7.285.4327.0	5
	4-pole	IVBWKI35 - 4	Z7.285.4427.0	5
	5-pole	IVBWKI35 - 5	Z7.285.4527.0	5

Multi-tier terminals for installation distribution boards with screw connection

WKI 4 DU WKI 4 D-D


- Installation multi-tier terminal with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- Model DU: one busbar below

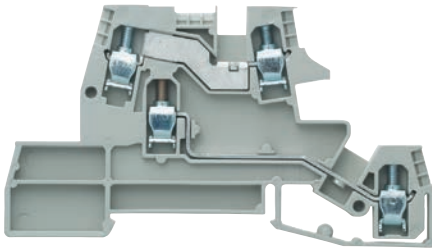

Description	Type	Part.No.	Std. Pack
Installation rail terminal blocks	WKI 4 DU /V0	56.404.9655.0	50
Installation rail terminal blocks	WKI 4 D-D /V0	56.404.9755.0	50
General data			
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 51.5 mm		
Wire strip length	7 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.5-4 mm ²		
Cross section solid/stranded	0.5 - 6 mm ²		
Cross-section, AWG		22-10 AWG	22-10 AWG
Rated current	26 A	24 A	25 A
Rated voltage	400 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	API 4/2/V0	07.311.6555.0	10
Partition	TWI 4/V0	07.311.6955.0	10
Jumper bar	2-pole 9703 / 6- 2	Z7.211.0227.0	50
	5-pole 9703 / 6- 5	Z7.211.0527.0	50
	insulated 12-pole IVB WKI 4-12	Z7.271.5227.0	10
	sold by the meter 70-pole 9703 / 6 M-70	Z7.211.0027.0	10

WKI 4 D-D-SL WKI 4 N-D-SL


- Installation multi-tier terminal with screw connection for mounting on TS 35
- Nominal cross section 4 mm²

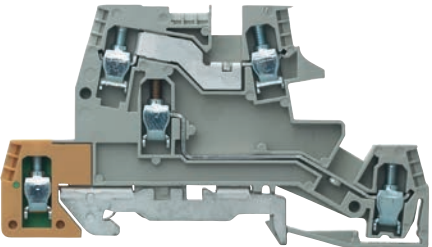

Description	Type	Part.No.	Std. Pack
Installation rail terminal blocks	WKI 4 D-D-SL /V0	56.404.9855.0	50
Installation rail terminal blocks	WKI 4 N-D-SL /V0	56.404.9455.0	50
General data			
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 51.5 mm		
Wire strip length	7 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.5-4 mm ²		
Cross section solid/stranded	0.5 - 6 mm ²		
Cross-section, AWG		22-10 AWG	22-10 AWG
Rated current	26 A	24 A	25 A
Rated voltage	400 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	API 4/2/V0	07.311.6555.0	10
Partition	TWI 4/V0	07.311.6955.0	10
Jumper bar	2-pole 9703 / 6- 2	Z7.211.0227.0	50
	5-pole 9703 / 6- 5	Z7.211.0527.0	50
	insulated 12-pole IVB WKI 4-12	Z7.271.5227.0	10
	sold by the meter 70-pole 9703 / 6 M-70	Z7.211.0027.0	10

WKI 4 NT-D-SL


- Installation multi-tier terminal with screw connection for mounting on TS 35
- Nominal cross section 4 mm²

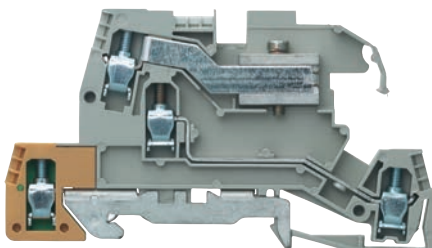

Description	Type	Part.No.	Std. Pack
Installation rail terminal blocks	WKI 4 NT -D-SL /V0	56.404.9555.0	50
	WKI 4 NT -D-SL GL/V0	56.404.9255.0	50
General data			
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 51.5 mm		
Wire strip length	7 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.5-4 mm ²		
Cross section solid/stranded	0.5 - 6 mm ²		
Cross-section, AWG		22-10 AWG	22-10 AWG
Rated current	26 A	24 A	25 A
Rated voltage	400 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	API 4/2/V0	07.311.6555.0	10
Jumper bar	2-pole 9703 / 6- 2	Z7.211.0227.0	50
	3-pole 9703 / 6- 3	Z7.211.0327.0	50
	insulated 12-pole IVB WKI 4-12	Z7.271.5227.0	10
	sold by the meter 70-pole 9703 / 6 M-70	Z7.211.0027.0	10
Busbar	9813 M 10X 3 1000MM	98.290.0000.0	1
	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKI 4 NTN-D-SL


- Installation multi-tier terminal with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- The busbar cannot pass by on the outside. These two terminals should therefore be placed at the start or end of a terminal group.

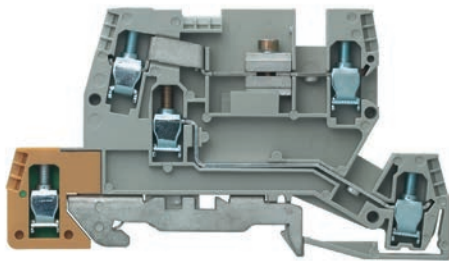

Description	Type	Part.No.	Std. Pack
Installation rail terminal blocks	WKI 4 NTN-D-SL /V0	56.404.9155.0	50
General data			
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 51.5 mm		
Wire strip length	7 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.5-4 mm ²		
Cross section solid/stranded	0.5 - 6 mm ²		
Cross-section, AWG		22-10 AWG	22-10 AWG
Rated current	26 A	24 A	25 A
Rated voltage	400 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	API 4/3/V0	07.311.6855.0	10
Jumper bar	2-pole 9703 / 6- 2	Z7.211.0227.0	50
	3-pole 9703 / 6- 3	Z7.211.0327.0	50
	insulated 12-pole IVB WKI 4-12	Z7.271.5227.0	10
	sold by the meter 70-pole 9703 / 6 M-70	Z7.211.0027.0	10

WKI 4 TKG-D-SL

- Multi-tier fuse terminal with screw connection for mounting on TS 35
- Nominal cross section 4 mm²
- The busbar cannot pass by on the outside. The terminal should therefore be placed at the start or end of a terminal group.

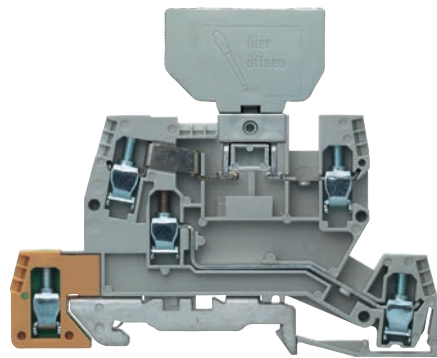

Description	Type	Part.No.	Std. Pack
Installation rail terminal blocks	WKI 4 TKG-D-SL /V0	56.404.8855.0	50
General data			
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 51.5 mm		
Wire strip length	7 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.5-4 mm ²		
Cross section solid/stranded	0.5 - 6 mm ²		
Cross-section, AWG		22-10 AWG	22-10 AWG
Rated current	26 A	12 A	12 A
Rated voltage	400 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	API 4/3/V0	07.311.6855.0	10
Jumper bar	2-pole 9703 / 6- 2	Z7.211.0227.0	50
	5-pole 9703 / 6- 5	Z7.211.0527.0	50
	insulated 12-pole IVB WKI 4-12	Z7.271.5227.0	10
	sold by the meter 70-pole 9703 / 6 M-70	Z7.211.0027.0	10

Fuse holder


- Fuse holder for built-in in WKI 4 TKG-D-SL
- Nominal current in accordance with VDE 0820 T2/EN 60 127-2 with use of 1.6 W – 6.3 A, for individual terminal – 4 A with terminals directly next to each other
- Voltage and current are determined through the installed lamp display and the fuse insert used.





Description	Type	Part.No.	Std. Pack
Fuse holder for fuse 5 x 20	Si ST	Z1.299.4055.0	10
Fuse holder with indicator (24 V)	Si ST LED	Z1.299.4155.0	10
Fuse holder with indicator (220 V)	Si ST GL	Z1.299.4255.0	10

selos CLASSIC

DIN rail terminal blocks with screw connection, type 9700 A.. S35

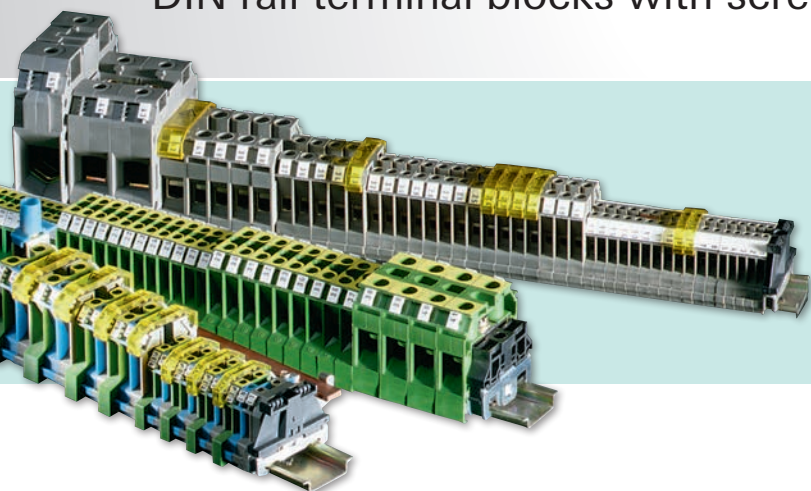

The **selos** CLASSIC series offers the highest-quality connecting technology. Thanks to its unique clamping body design, aluminum or copper wire connections are long lasting and maintenance-free. The product line includes feed-through and ground blocks for wires up to 50 mm².

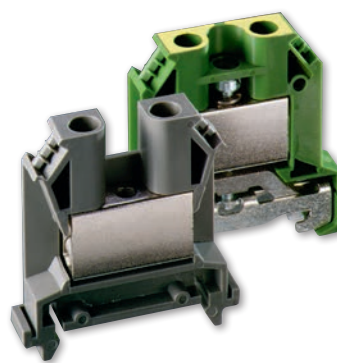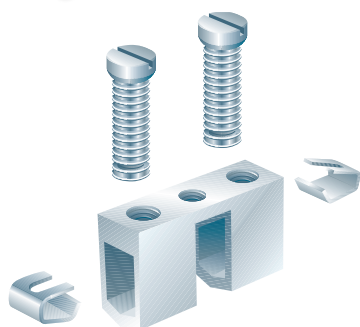

High-quality screw connection technology

- Steel free clamping body
 - Increased corrosion resistance
 - Extruded clamping body, nickel-plated brass
- Low contact resistance
 - Clamping body has similar physical and chemical characteristics as the conductor
 - One piece clamping body/current bar

Wide connection range

- Connection range 0.5 – 50 mm²
Solid, fine-stranded and stranded wires can be connected to the terminal blocks of **selos** CLASSIC LINE without ferrules, as all block sizes have wire protection.




Connection of aluminum wires possible

The following always applies when connecting aluminium wires in the **selos** CLASSIC LINE:

- After being stripped, the ends of the wires must be cleaned with a brush and then coated with acid-free grease to prevent further oxidation.
- The terminal should be tightened to approx. 20% higher torque than what is stated for the clamping screw.

With this type of terminal, it is not necessary to retighten the clamping screws.

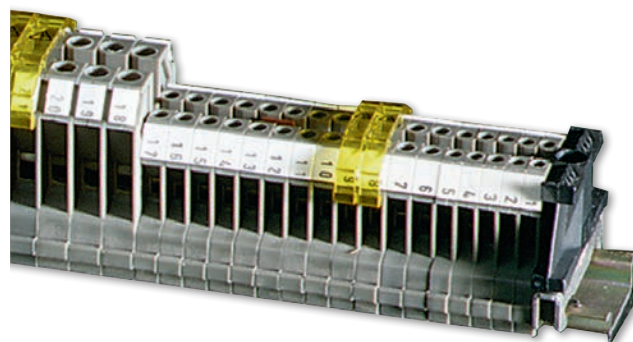

Compact design

- **Save space on the rail**
selos CLASSIC LINE offers higher density due to the wire size and terminal block pitch:

Connection range	Pitch
2,5 mm ²	5 mm
4 mm ²	6 mm
10 mm ²	8 mm
16 mm ²	10 mm
25 mm ²	12 mm
35 mm ²	16 mm

Feed-through blocks with screw connection, type 9700 A.. S35

9700 A/5 S35

- Feed-through block for mounting on TS 35
- Nominal cross section 2.5 mm²



Description	Type	Part No.	Std. Pack	
Feed-through block	gray	9700 A/5 S35	54.003.7553.0	100
Feed-through block, (Ex)i	blue	9700 A/5 S35 BLAU	54.003.7553.6	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 47 mm / 38 mm			
Wire strip length	9 mm			
Approvals				
Technical data		IEC	UL	CSA
Ratings for use of insulating sleeves	EN 60 947-7-1			
Cross section fine-stranded	0.5 – 2.5 mm ²			
Cross section solid/stranded	0.5 – 4 mm ²			
Cross section, AWG		18–12	22–12	
Rated current	24 A	20/30 A	25 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate, gray	9701/6	07.310.3153.0	10	
Partition, gray	9702/6	07.310.3453.0	10	
Cross connector with screws,	2-pole	9703/5-2	Z7.215.0227.0	50
E-Cu, uninsulated	3-pole	9703/5-3	Z7.215.0327.0	50
	4-pole	9703/5-4	Z7.215.0427.0	50
	5-pole	9703/5-5	Z7.215.0527.0	50
	6-pole	9703/5-6	Z7.215.0627.0	50
Cut-to-order strip 0,6 m long	9703/5-M	Z7.215.0027.0	10	
2-pole switchable jumper		Z7.269.3523.0	50	
Adapter for test plug	9011 D	05.508.8921.0	10	
Cover with warn. symbol for 1 block	yellow	04.325.1656.0	10	

9700 A/6 S35

- Feed-through block for mounting on TS 35
- Nominal cross section 4 mm²



Description	Type	Part No.	Std. Pack	
Feed-through block	gray	9700 A/6 S35	54.004.7553.0	100
Feed-through block, (Ex)i	blue	9700 A/6 S35 BLAU	54.004.7553.6	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 47 mm / 38 mm			
Wire strip length	9 mm			
Approvals				
Technical data		IEC	UL	CSA
Ratings for use of insulating sleeves	EN 60 947-7-1			
Cross section fine-stranded	0.5 – 4 mm ²			
Cross section solid/stranded	0.5 – 6 mm ²			
Cross section, AWG		18–10	22–10	
Rated current	32 A	30/30 A	35 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate, gray	9701/6	07.310.3153.0	10	
Partition, gray	9702/6	07.310.3453.0	10	
Cross connector with screws,	2-pole	9703/6-2	Z7.211.0227.0	50
E-Cu, uninsulated	3-pole	9703/6-3	Z7.211.0327.0	50
	4-pole	9703/6-4	Z7.211.0427.0	50
	5-pole	9703/6-5	Z7.211.0527.0	50
	6-pole	9703/6-6	Z7.211.0627.0	50
Cut-to-order strip 0,6 m long	9703/6-M	Z7.211.0027.0	10	
2-pole switchable jumper		Z7.269.2923.0	50	
Adapter for test plug	9011 C	05.508.8821.0	10	
Cover with warn. symbol for 1 block	yellow	04.325.1056.0	10	

Feed-through blocks with screw connection, type 9700 A.. S35

9700 A/8 S35

- Feed-through block for mounting on TS 35
- Nominal cross section 10 mm²



Description	Type	Part No.	Std. Pack	
Feed-through block	gray	9700 A/8 S 35	54.010.7553.0	100
Feed-through block, (Ex)i	blue	9700 A/8 S 35 BLAU	54.010.7553.6	100
General data				
Width / length / height, incl. TS 7.5	8 mm / 47 mm / 48 mm			
Wire strip length	12 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	1 – 10 mm ²			
Cross section solid/stranded	1 – 10 mm ²			
Cross section, AWG		18–8	18–8	
Rated current	57 A	50/50 A	55 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	9701/8	07.310.3253.0	10
Partition	gray	9702/8	07.310.3553.0	10
Cross connector with screws, E-Cu, uninsulated	2-pole	9703/8-2	Z7.212.0227.0	50
	3-pole	9703/8-3	Z7.212.0327.0	50
	4-pole	9703/8-4	Z7.212.0427.0	50
	5-pole	9703/8-5	Z7.212.0527.0	50
	6-pole	9703/8-6	Z7.212.0627.0	50
2-pole switchable jumper			Z7.269.3023.0	50
Adapter for test plug		9011 B	05.508.3221.0	10
Cover with warn. symbol for 1 block	yellow		04.325.1156.0	10
Rapid mounting tool			05.593.5953.0	10

9700 A/10 S35

- Feed-through block for mounting on TS 35
- Nominal cross section 16 mm²



Description	Type	Part No.	Std. Pack	
Feed-through block	gray	9700 A/10 S 35	54.016.7553.0	100
Feed-through block, (Ex)i	blue	9700 A/10 S 35 BLAU	54.016.7553.6	100
General data				
Width / length / height, incl. TS 7.5	10 mm / 49 mm / 51 mm			
Wire strip length	15 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	1.5 – 16 mm ²			
Cross section solid/stranded	1.5 – 16 mm ²			
Cross section, AWG		18–6	18–6	
Rated current	76 A	65/70 A	70 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	9701/10	07.310.3953.0	10
Partition	gray	9702/10	07.310.4053.0	10
Cross connector with screws, E-Cu, uninsulated	2-pole	9703/10-2	Z7.214.0227.0	50
	3-pole	9703/10-3	Z7.214.0327.0	50
	4-pole	9703/10-4	Z7.214.0427.0	50
	5-pole	9703/10-5	Z7.214.0527.0	50
	6-pole	9703/10-6	Z7.214.0627.0	50
2-pole switchable jumper			Z7.269.3123.0	50
Adapter for test plug		9011 A	05.508.3121.0	10
Cover with warn. symbol for 1 block	yellow		04.325.1256.0	10

9700 A/12 S35


- Feed-through block for mounting on TS 35
- Nominal cross section 25 mm²



Description	Type	Part No.	Std. Pack
Feed-through block	gray	9700 A/12 S 35	54.025.7553.0
Feed-through block, (Ex)i	blue	9700 A/12 S 35 BLAU	54.025.7553.6
General data			
Width / length / height, incl. TS 7.5	12 mm / 59 mm / 58 mm		
Wire strip length	20 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	2.5 – 25 mm ²		
Cross section solid/stranded	2.5 – 35 mm ²		
Cross section, AWG		14–4	14–4
Rated current	101 A	85/100 A	100 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	9701/12	07.310.3353.0
Partition	gray	9702/12	07.310.3653.0
Cross connector with screws, E-Cu, uninsulated	2-pole	9703/12-2	Z7.213.0227.0
	3-pole	9703/12-3	Z7.213.0327.0
	4-pole	9703/12-4	Z7.213.0427.0
	5-pole	9703/12-5	Z7.213.0527.0
	6-pole	9703/12-6	Z7.213.0627.0
2-pole switchable jumper			Z7.269.3223.0
Adapter for test plug			05.508.6521.0
Cover with warn. symbol for 1 block	yellow		04.325.1356.0

9700 A/16 S35

- Feed-through block for mounting on TS 35
- Nominal cross section 35 mm²

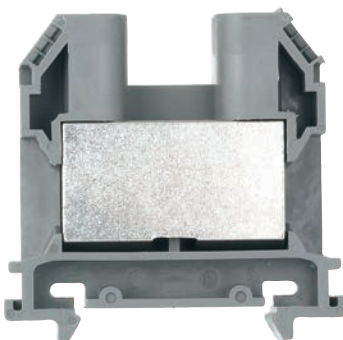


Description	Type	Part No.	Std. Pack
Feed-through block	gray	9700 A/16 S 35	54.035.7553.0
Feed-through block, (Ex)i	blue	9700 A/16 S 35 BLAU	54.035.7553.6
General data			
Width / length / height, incl. TS 7.5	16 mm / 59 mm / 58 mm		
Wire strip length	20 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	2,5 – 35 mm ²		
Cross section solid/stranded	2,5 – 50 mm ²		
Cross section, AWG		6–2	12–2
Rated current	125 A	115/130 A	125 A
Rated voltage	1000 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	9701/12	07.310.3353.0
Partition	gray	9702/12	07.310.3653.0
Cross connector with screws, E-Cu, uninsulated	2-pole	9703/16-2	Z7.216.0227.0
	3-pole	9703/16-3	Z7.216.0327.0
	4-pole	9703/16-4	Z7.216.0427.0
	5-pole	9703/16-5	Z7.216.0527.0
	6-pole	9703/16-6	Z7.216.0627.0
2-pole switchable jumper			Z7.269.3423.0
Adapter for test plug			05.508.6521.0
Cover with warn. symbol for 1 block	yellow		04.325.1456.0

Ground blocks with screw connection, Typ 9700 A.. S35

9700 A/6 SL2 S35


- Ground block for mounting on TS 35
- Nominal cross section 4 mm²

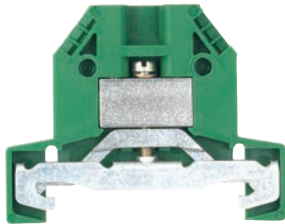

Description	Type	Part No.	Std. Pack
Ground block	green-yellow	9700 A/6 SL 2 S 35	56.004.9053.0
General data			
Width / length / height, incl. TS 7.5	6 mm / 48 mm / 38 mm		
Wire strip length	9 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	0.5 – 4 mm ²		
Cross section solid/stranded	0.5 – 6 mm ²		
Cross section, AWG		18–10	22–10
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	green	9701/6 SL	07.312.0053.0

9700 A/8 SL2 S35

- Ground block for mounting on TS 35
- Nominal cross section 10 mm²

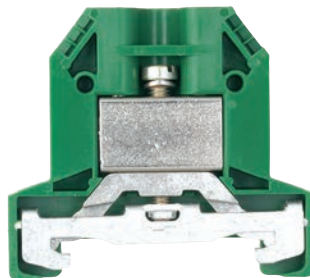

Description	Type	Part No.	Std. Pack
Ground block	green-yellow	9700 A/8 SL 2 S 35	56.010.9053.0
General data			
Width / length / height, incl. TS 7.5	8 mm / 53 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	0.5 – 10 mm ²		
Cross section solid/stranded	0.5 – 10 mm ²		
Cross section, AWG		18–8	18–8
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	green	9701/8 SL	07.312.0153.0

9700 A/10 SL2 S35

- Ground block for mounting on TS 35
- Nominal cross section 16 mm²




Description	Type	Part No.	Std. Pack
Ground block	green-yellow	9700 A/10 SL 2 S 35	56.016.9053.0
General data			
Width / length / height, incl. TS 7.5	10 mm / 53 mm / 51 mm		
Wire strip length	16 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2		
Cross section fine-stranded	1.5 – 16 mm ²		
Cross section solid/stranded	1.5 – 16 mm ²		
Cross section, AWG		18–6	16–6
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	green	9701/10 SL	07.312.0253.0

9700 A/16 SL2 S35

- Ground block for mounting on TS 35
- Nominal cross section 35 mm²



Description	Type	Part No.	Std. Pack	
Ground block	green-yellow	9700 A/16 SL 2 S 35	56.035.9053.0	50
General data				
Width / length / height, incl. TS 7.5	16 mm / 53 mm / 58 mm			
Wire strip length	18 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			
Cross section fine-stranded	2.5 – 35 mm ²			
Cross section solid/stranded	2.5 – 50 mm ²			
Cross section, AWG		12–2	12–2	
Rated current				
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	green	9701/16 SL	07.312.0353.0	10

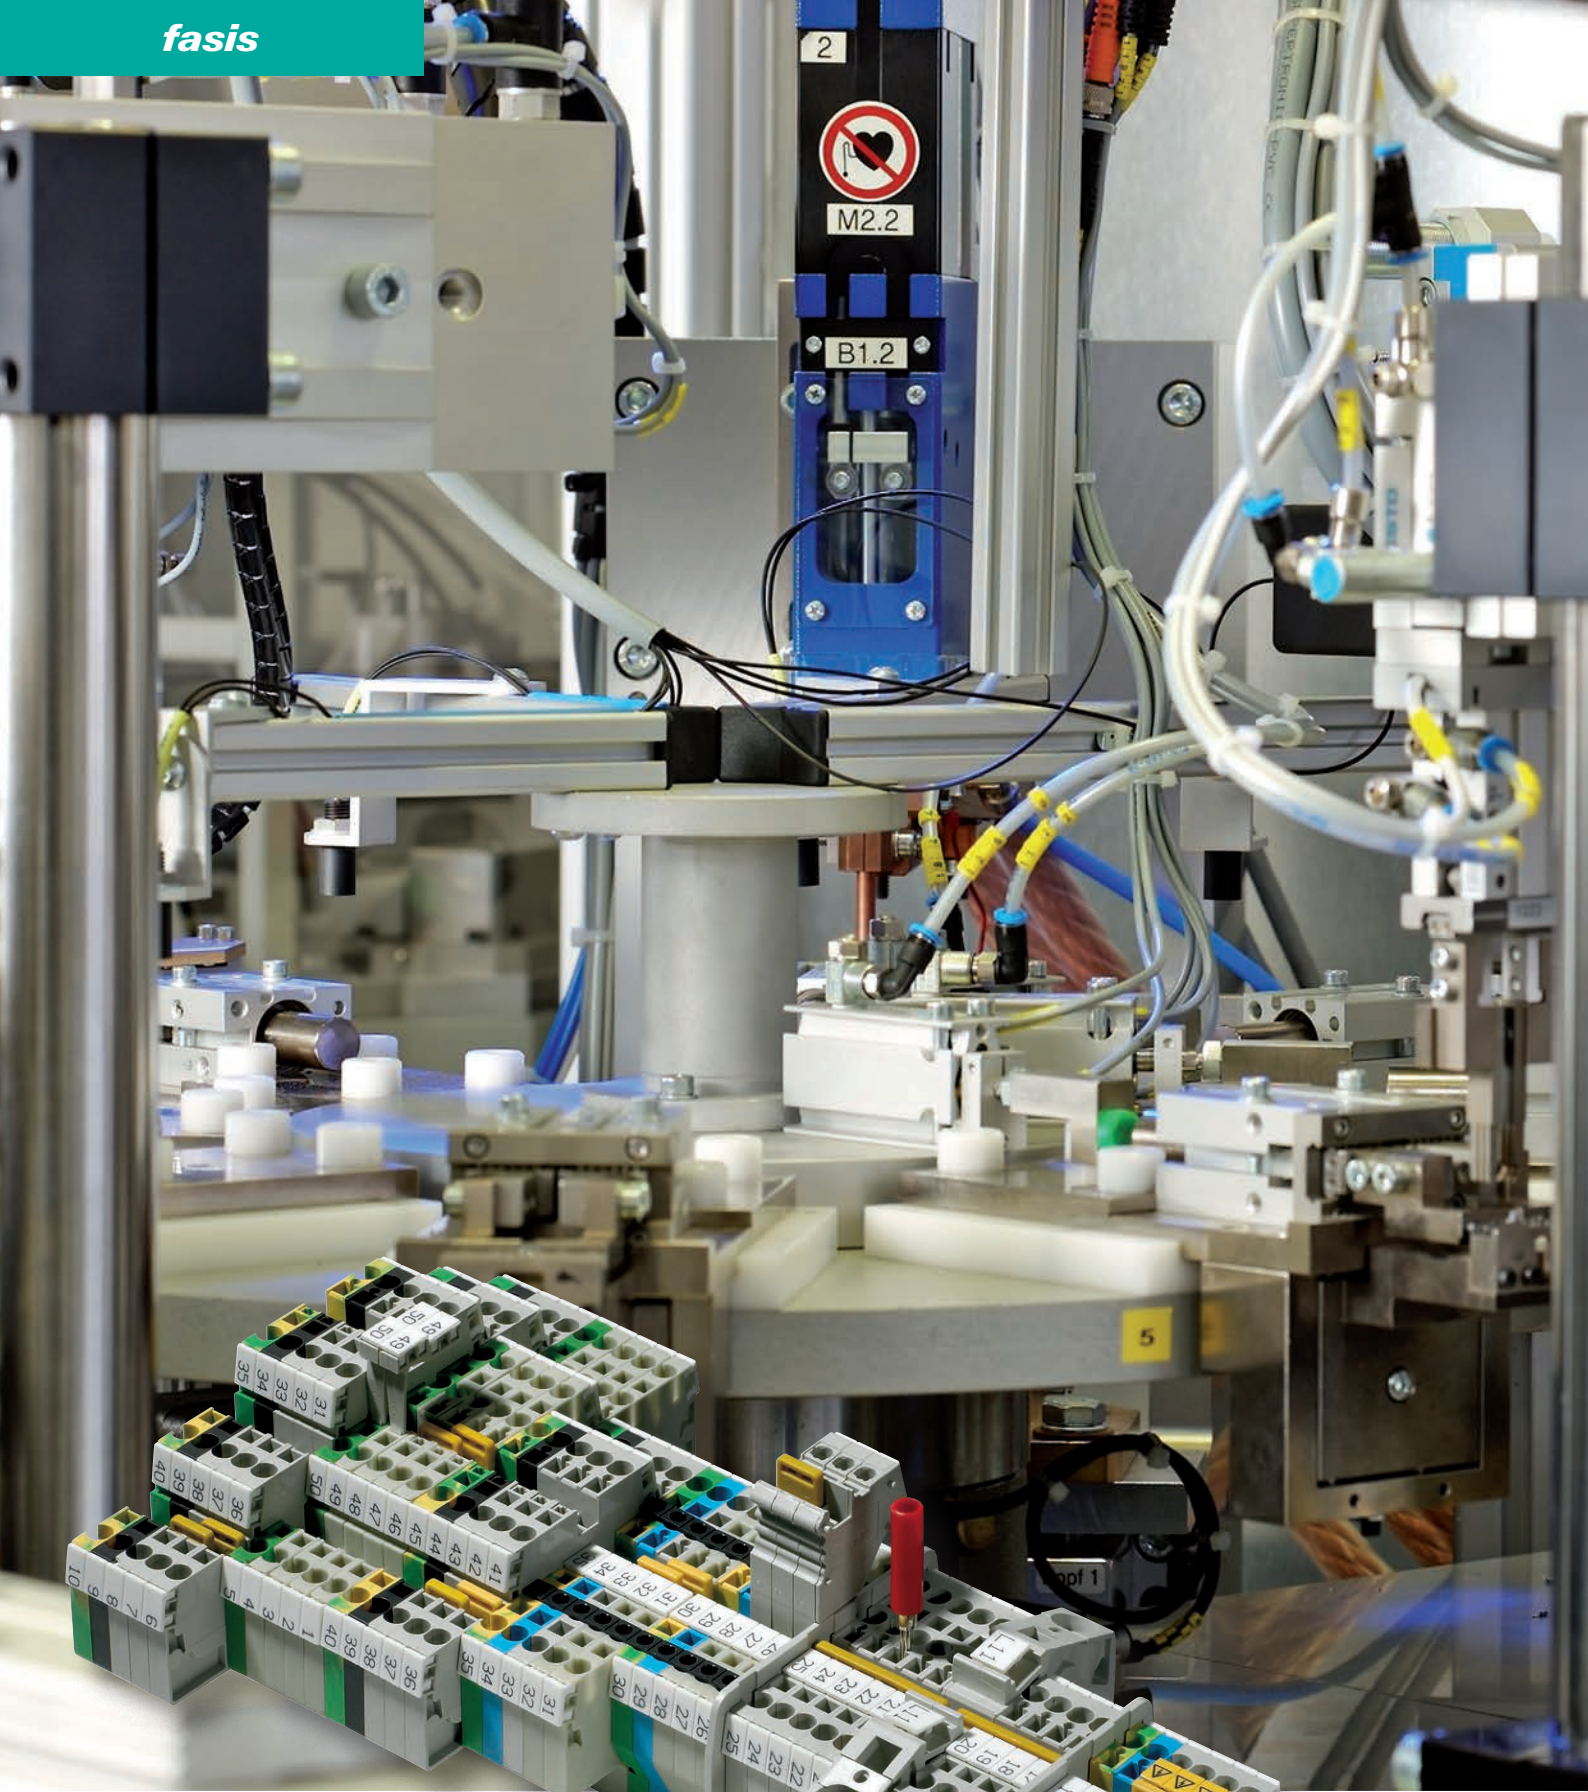

fasis WKFN

DIN Rail Terminal Blocks with Tension Spring Connection

The DIN rail terminal block with tension spring technology: **fasis** WKFN is easy to operate, saves time and costs during wiring and reduces inventory costs, and guarantees vibration-proof and maintenance-free connections with high contact forces.



The product line includes feed-through and ground blocks with 2, 3 or 4 termination point as well as multi-tier blocks in two- and three-tier designs, knife-edge disconnect blocks in one- and two-tier designs and fuse blocks. In addition, specialty function blocks are available with application-specific diode circuits.

fasis WKFN has been designed for use in machinery and plant construction as well as hazardous locations subject to explosion.

Connection cross-sections up to 35 mm²


Rated current of up to 125 A

Rated voltage of up to 1000 V

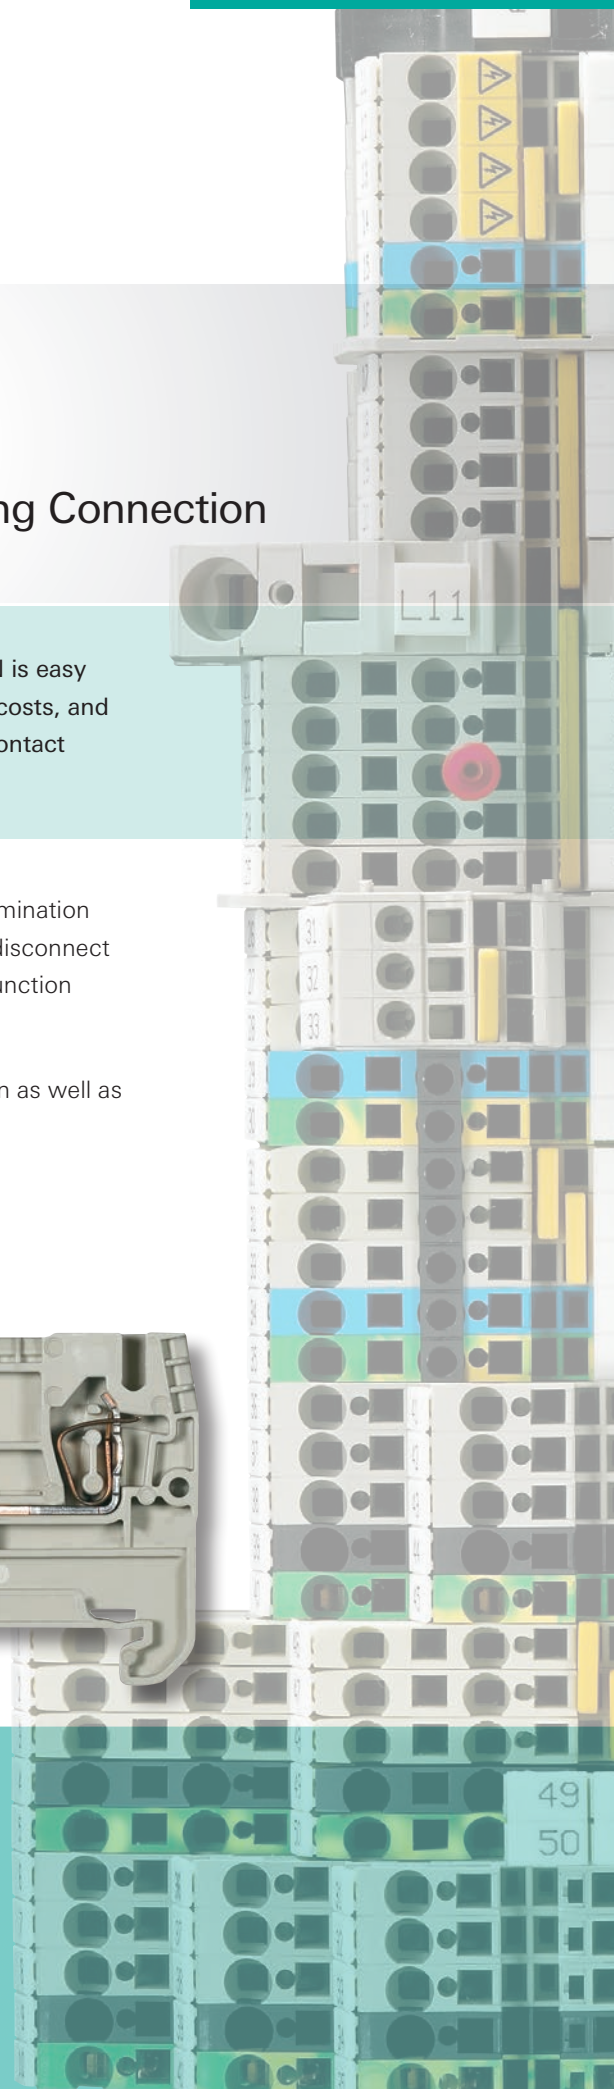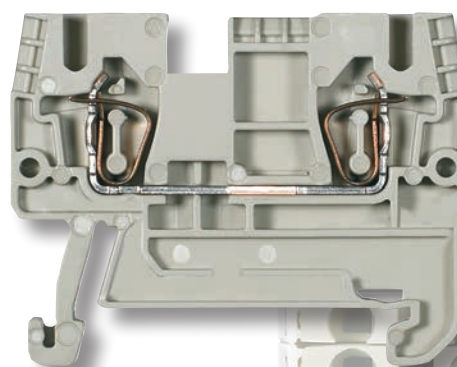



DIN rail terminal blocks with tension spring connection

The DIN rail terminal block with tension spring technology: **fasis** WKFN is easy to operate, saves time and costs during wiring and reduces inventory costs, and guarantees vibration-proof and maintenance-free connections with high contact forces.

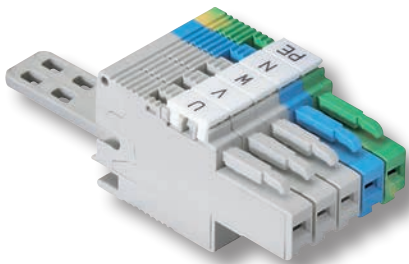

Plug & Play in the control cabinet

- Plug-in system – **fasis** CON
- 32A und 4 mm² auf nur 5mm Baubreite

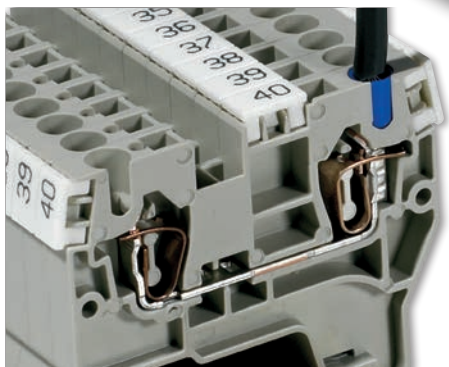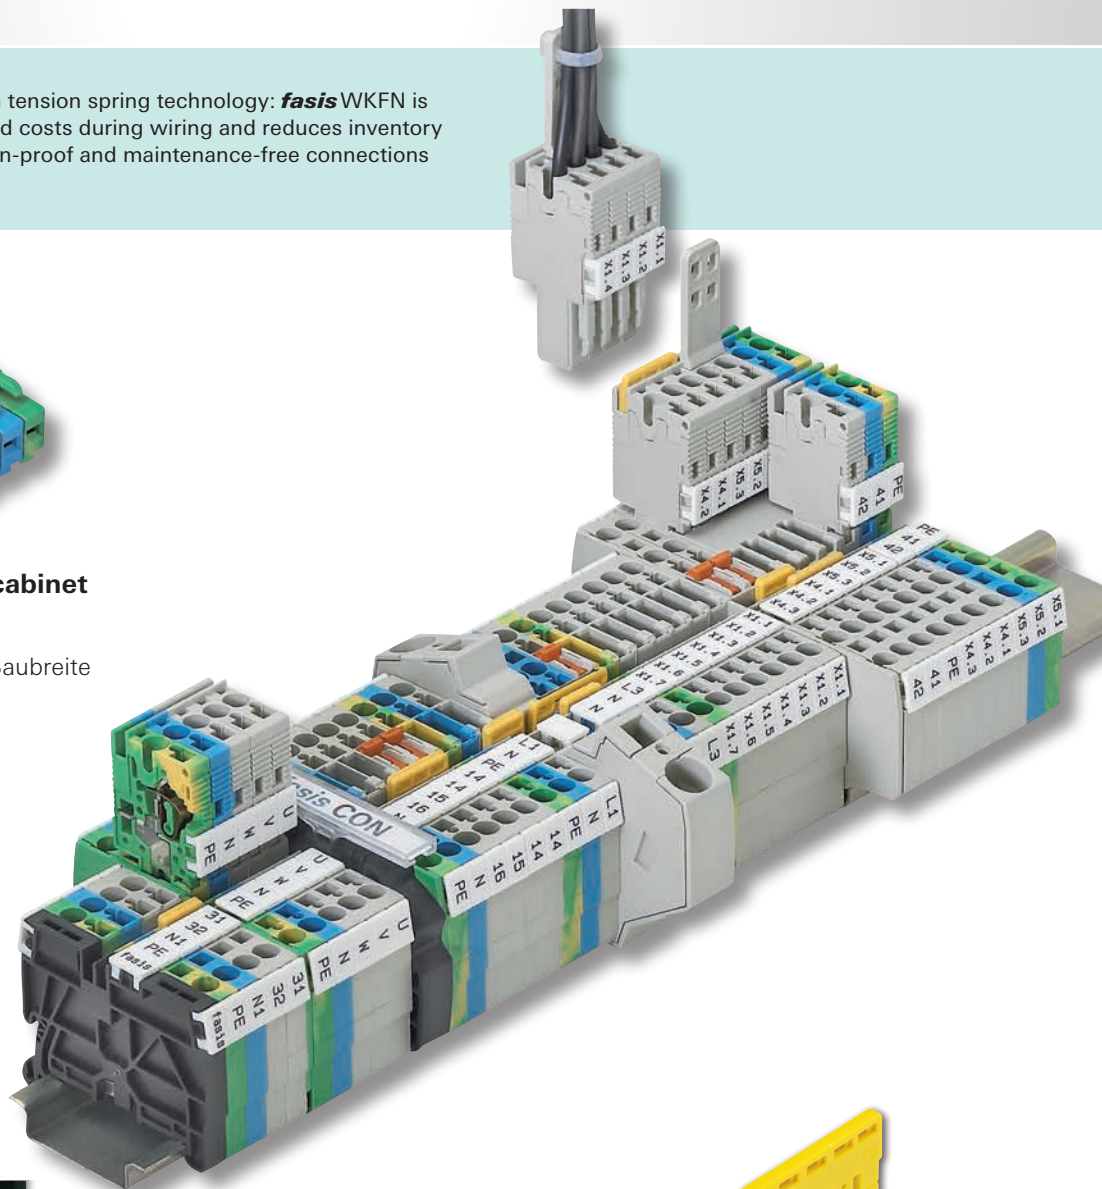

Durable and maintenance-free connection


- Tension spring connection resistant to vibration
- Connect with and without ferrules

Fine-stranded wire perfectly connected

- Simple operation with a standard screwdriver
- Screwdriver is held securely in the terminal for optimal handling while connecting wires

Completing the Concept


- Dual jumpering channels
- Plug-in jumper bars
- Potential distribution by supply block up to 76 A



Easy testing

- Function check via modular test adapter
- Integrated test jacks in all blocks

Wieland jumpering system – Perfect technology

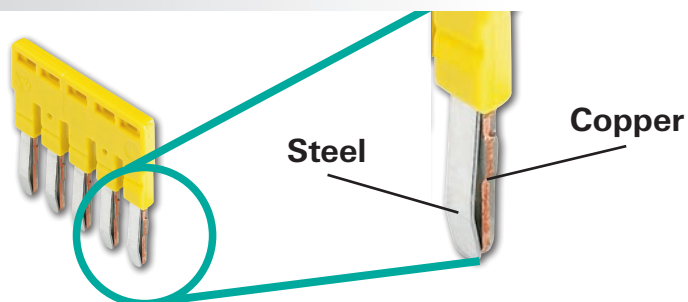


Perfect technology

- Copper current bar guarantees low contact resistance
- Steel spring guarantees strength, durability, and long-term stability



Extremely rugged!

- Indestructible steel spring
- Vibration-proof connection

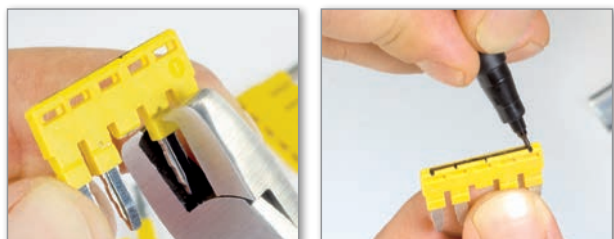

Simple customization


- Individual poles easy to remove
- Circuits easy to identify

Wieland marking system – Reliable identification



Marking strips – Dependable

- Maximum hold to the terminal
- Solidify integrity of the assembly

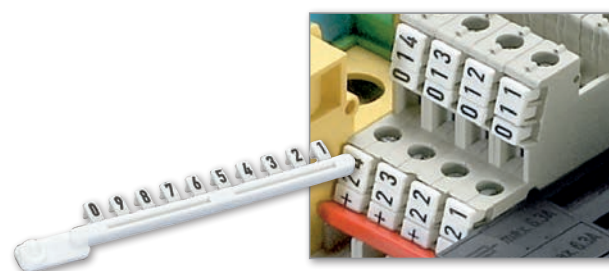

Marking tags – Individual

- Individual labeling with minimum effort
- Ideal for service and maintenance


The accessories


- Wire entry guide strips for secure connection of wires smaller than 1 mm²
- Snap-on covers with warning symbols
- Wieland screwdriver for optimal operation of spring tension terminals





Feed-through blocks with tension spring connection


WKF 1,5/35


- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170





Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKF 1,5/35	56.702.0053.0
Feed-through block	blue	WKF 1,5/35 BLAU	56.702.0053.6
General data			
Width / length / height, incl. TS 7.5	4 mm / 49 mm / 37 mm		
Wire strip length	10 mm		
Approvals	ATEX  KEMA 03 ATEX 2056 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-1		EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²		0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²		0.14–1.5 mm ²
Cross section, AWG		26–14	26–14
Rated current	17.5 A	15 A	15 A
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		440 V [*]
Pollution degree	3		
Accessories			
End plate	gray	APF 1,5	07.312.8153.0
Partition	gray	TWF 1,5	07.312.8253.0


WKF 1,5 D1/2/35

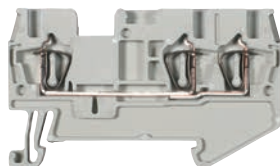
- Duo feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170





Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKF 1,5 D1/2/35	56.702.5053.0
Feed-through block	blue	WKF 1,5 D1/2/35 BLAU	56.702.5053.6
General data			
Width / length / height, incl. TS 7.5	4 mm / 60 mm / 37 mm		
Wire strip length	10 mm		
Approvals	ATEX  KEMA 03 ATEX 2056 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-1		EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²		0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²		0.14–1.5 mm ²
Cross section, AWG		26–14	26–14
Rated current	17.5 A	15 A	15 A
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		440 V [*]
Pollution degree	3		
Accessories			
End plate	gray	APF 1,5 D1/2	07.312.8353.0
Segment end plate	gray	SAPF 1,5	07.312.8953.0
Partition	gray	TWF 1,5 D1/2	07.312.8453.0





WKF 1,5 D2/2/35

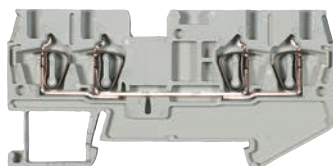- Duo feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKF 1,5 D2/2/35	56.702.5153.0
Feed-through block	blue	WKF 1,5 D2/2/35 BLAU	56.702.5153.6
General data			
Width / length / height, incl. TS 7.5	4 mm / 72 mm / 37 mm		
Wire strip length	10 mm		
Approvals	ATEX  KEMA 03 ATEX 2056 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-1		EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²		0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²		0.14–1.5 mm ²
Cross section, AWG		26–14	26–14
Rated current	17.5 A	15 A	15 A
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		440 V [*]
Pollution degree	3		
Accessories			
End plate	gray	APF 1,5 D2/2	07.312.8553.0
Segment end plate	gray	SAPF 1,5	07.312.8953.0
Partition	gray	TWF 1,5 D2/2	07.312.8653.0

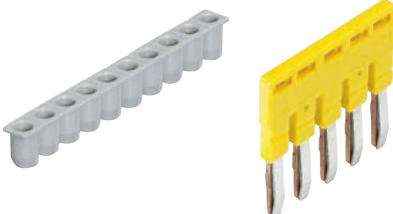
Accessories for *fasis* WKF 1,5...

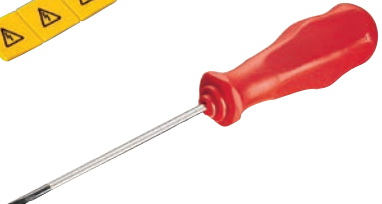
Accessories		Type	Part No.	Std. Pack
	Cross connector, insulated	2-pole IVB WKF 1,5-2	Z7.268.0227.0	10
		3-pole IVB WKF 1,5-3	Z7.268.0327.0	10
		4-pole IVB WKF 1,5-4	Z7.268.0427.0	10
		5-pole IVB WKF 1,5-5	Z7.268.0527.0	10
		10-pole IVB WKF 1,5-10	Z7.268.1027.0	10
		20-pole IVB WKF 1,5-20	Z7.268.2027.0	10
	Wire entry guide	0.13-0.2 mm ² LEL 1,5/1 WEISS	05.564.4253.0	10
		0.25-0.5 mm ² LEL 1,5/2 GRAU	05.564.4353.0	10
	Cover with warning symbol over 5 blocks	ADF 1,5/5 GELB	04.343.6953.8	10
	Screwdriver, uninsulated	DIN 5264 B 0,4x2,5	06.502.4300.0	5







^{*)} For maintaining the proper isolation distances, the open side of a feed-through terminal block as well as both sides of a jumper are to be covered by partitions.
³⁾ Rated current when using cross connectors

Feed-through blocks with tension spring connection


WKFN 2,5/35


- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170









Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 2,5/35	56.703.0055.0	100
Feed-through block	blue	WKFN 2,5/35 BLAU	56.703.0055.6	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 47 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-1-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current	24 A	20 A	24 A	22 A ¹⁾
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				¹⁾ for 40 K and 45 K
Accessories				
End plate	gray	APFN 2,5	07.312.6755.0	10
End plate	blue	APFN 2,5 BLAU	07.312.6755.6	10
Partition	gray	TWFN 2,5	07.312.6855.0	10

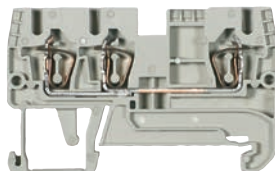
WKFN 2,5 D1/2/35


- Duo feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170









Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 2,5 D1/2/35	56.703.5055.0	100
Feed-through block	blue	WKFN 2,5 D1/2/35 BLAU	56.703.5055.6	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 60 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-1-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current	24 A	20 A	24 A	22 A ¹⁾
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				¹⁾ for 40 K and 45 K
Accessories				
End plate	gray	APFN 2,5 D1/2	07.312.6955.0	10
End plate	blue	APFN 2,5 D1/2 BLAU	07.312.6955.6	10
Partition	gray	TWFN 2,5 D1/2	07.312.7055.0	10

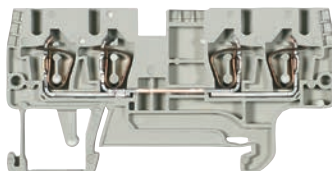WKFN 2,5 D2/2/35


- Duo feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170






Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 2,5 D2/2/35	56.703.5155.0	100
Feed-through block	blue	WKFN 2,5 D2/2/35 BLAU	56.703.5155.6	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 72 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-1-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current	24 A	20 A	24 A	22 A ¹⁾
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				¹⁾ for 40 K and 45 K
Accessories				
End plate	gray	APFN 2,5 D2/2	07.312.7155.0	10
End plate	blue	APFN 2,5 D2/2 BLAU	07.312.7155.6	10
Partition	gray	TWFN 2,5 D2/2	07.312.7255.0	10

Supply block

WKF 16/35 PV/WKFN

- Supply block for mounting on TS 35
- Nominal cross section 16 mm²
- Ex e II/II  II 2GD IM2
Follow the EX installation instructions on page 170

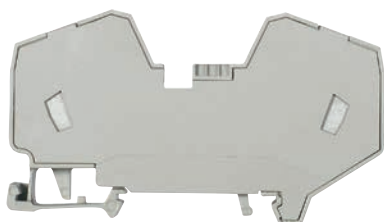

Description	Type	Part No.	Std. Pack	
Power feed-in block	gray	WKF 16/35 PV/WKFN	56.716.0353.0	20
General data				
Width / length / height, incl. TS 7.5	12 mm / 82 mm / 48 mm			
Wire strip length	15 mm			
Approvals	 KEMA 01 ATEX 2087 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	4–16 mm ²			4–16 mm ²
Cross section solid/stranded	4–16 mm ²			4–16 mm ²
Cross section, AWG		24–4	12–4	
Rated current	76 A	75 A	78 A	64 A*
Rated voltage	800 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	* Type-specific output currents upon request			
Accessories				
Cover with warning symbol over 4 blocks	ADF 16/4 GELB	04.343.6653.8	10	
Screwdriver, uninsulated	DIN 5264 B 1,0x5,5	06.502.4200.0	5	

- Potential distribution with standard cross connector IVB WKF 2.5...
- Parallel connection of two cross connectors → double jumpering
- Potential distributions are possible on one or both sides

Potential-distribution	one side		both sides	
	single	double	single	double
I_{max}	48	68	72	76

$$I_{max} = \sum I_n \leq \sum I_{N \text{ block}}$$


Accessories for *fasis* WKFN 2,5...




Accessories	Type	Part No.	Std. Pack
Cross connector, insulated	2-pole IVB WKF 2,5–2	Z7.280.6227.0	10
	3-pole IVB WKF 2,5–3	Z7.280.6327.0	10
	4-pole IVB WKF 2,5–4	Z7.280.6427.0	10
	5-pole IVB WKF 2,5–5	Z7.280.6527.0	10
	6-pole IVB WKF 2,5–6	Z7.280.6627.0	10
	7-pole IVB WKF 2,5–7	Z7.280.6727.0	20
	8-pole IVB WKF 2,5–8	Z7.280.6827.0	20
	9-pole IVB WKF 2,5–9	Z7.280.6927.0	20
	10-pole IVB WKF 2,5–10	Z7.280.7027.0	20
	20-pole IVB WKF 2,5–20	Z7.280.8027.0	20
Wire entry guide	0.13–0.2 mm ² LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm ² LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm ² LELN 2,5/3 SCHWARZ	05.564.3955.0	100
Cover with warning symbol over 4 blocks	yellow ADFN 2,5/4 GELB	04.343.8353.8	10
Test adapter, modular	PS WKC/F	Z1.299.9753.0	10
Test plug	ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10







Feed-through blocks with tension spring connection

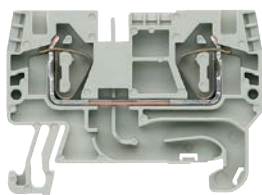WKFN 4/35

- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




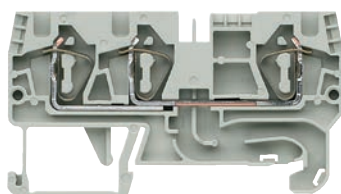
Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 4/35	56.704.0055.0
Feed-through block	blue	WKFN 4/35 BLAU	56.704.0055.6

General data				
Width / length / height, incl. TS 7.5	6 mm / 51 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB      PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.13–4 mm ²			
Cross section solid/stranded	0.13–6 mm ²			
Cross section, AWG		24–10	24–10	
Rated current	32 A	30 A	32 A	28/30 A ¹⁾
Rated voltage	800 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				
				¹⁾ 1. value at 40K/ 2. value at 45K







Accessories	Type	Part No.	Std. Pack
End plate	gray	APFN 4	07.312.9255.0
End plate	blue	APFN 4 BLAU	07.312.9255.6
Partition	gray	TWFN 4	07.312.9355.0

WKFN 4 D1/2/35

- Duo feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




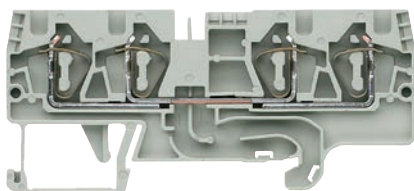
Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 4 D1/2/35	56.704.5055.0
Feed-through block	blue	WKFN 4 D1/2/35 BLAU	56.704.5055.6

General data				
Width / length / height, incl. TS 7.5	6 mm / 67 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB      PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.13–4 mm ²			
Cross section solid/stranded	0.13–6 mm ²			
Cross section, AWG		24–10	24–10	
Rated current	32 A	30 A	32 A	28/30 A ¹⁾
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				
				¹⁾ 1. value at 40K/ 2. value at 45K







Accessories	Type	Part No.	Std. Pack
End plate	gray	APFN 4 D1/2	07.312.9455.0
End plate	blue	APFN 4 D1/2 BLAU	07.312.9455.6
Partition	gray	TWFN 4 D1/2	07.312.9555.0

WKFN 4 D2/2/35

- Duo feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




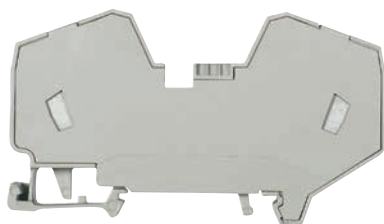
Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKFN 4 D2/2/35	56.704.5155.0
Feed-through block	blue	WKFN 4 D2/2/35 BLAU	56.704.5155.6


General data				
Width / length / height, incl. TS 7.5	6 mm / 82 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB      PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			
Cross section fine-stranded	0.13–4 mm ²			
Cross section solid/stranded	0.13–6 mm ²			
Cross section, AWG		24–10	24–10	
Rated current	32 A	30 A	32 A	28/30 A ¹⁾
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				
				¹⁾ 1. value at 40K/ 2. value at 45K

Accessories	Type	Part No.	Std. Pack
End plate	gray	APFN 4 D2/2	07.312.9055.0
End plate	blue	APFN 4 D2/2 BLAU	07.312.9055.6
Partition	gray	TWFN 4 D2/2	07.312.9155.0

WKF 16/35 PV/WKFN

- Supply block for mounting on TS 35
- Nominal cross section 16 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack	
Power feed-in block	gray	WKF 16/35 PV/WKFN	56.716.0353.0	20
General data				
Width / length / height, incl. TS 7.5	12 mm / 82 mm / 48 mm			
Wire strip length	15 mm			
Approvals	 KEMA 01 ATEX 2087 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	4–16 mm ²			4–16 mm ²
Cross section solid/stranded	4–16 mm ²			4–16 mm ²
Cross section, AWG		24–4	12–4	
Rated current	76 A	75 A	78 A	64 A*
Rated voltage	800 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	* Type-specific output currents upon request			
Accessories				
Cover with warning symbol over 4 blocks	ADF 16/4 GELB	04.343.6653.8	10	
Screwdriver, uninsulated	DIN 5264 B 1,0x5,5	06.502.4200.0	5	

- Potential distribution with standard cross connector IVB WKF 4...
- Parallel connection of two cross connectors → double jumpering
- Potential distributions are possible on one or both sides

Potential distribution	one side		both sides	
	single	double	single	double
I_{max}	64	76	76	76

$$I_{max} = \sum I_n \leq \sum I_{N \text{ block}}$$


Accessories for *fasis* WKFN 4...

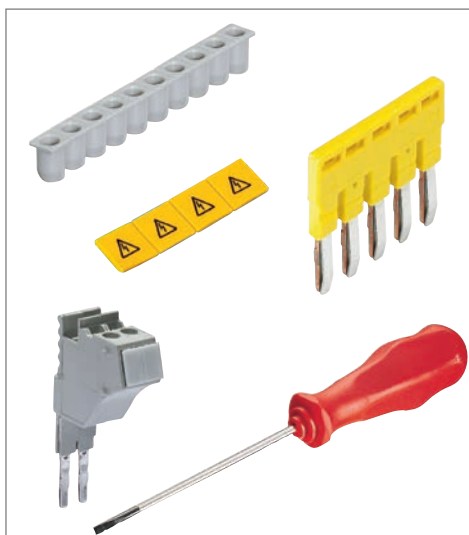







Accessories	Type	Part No.	Std. Pack
Cross connector, insulated	2-pole VB WKF 4–2	Z7.261.1227.0	10
	3-pole IVB WKF 4–3	Z7.261.1327.0	10
	4-pole IVB WKF 4–4	Z7.261.1427.0	10
	5-pole IVB WKF 4–5	Z7.261.1527.0	10
	6-pole IVB WKF 4–6	Z7.261.1627.0	10
	7-pole IVB WKF 4–7	Z7.261.1727.0	20
	8-pole IVB WKF 4–8	Z7.261.1827.0	20
	9-pole IVB WKF 4–9	Z7.261.1927.0	20
	10-pole IVB WKF 4–10	Z7.261.2027.0	20
Wire entry guide	0.13–0.2 mm ² LEL 4/1 WEISS	05.561.8553.0	100
	0.25–0.5 mm ² LEL 4/2 GRAU	05.561.8653.0	100
	0.75–1.0 mm ² LEL 4/3 SCHWARZ	05.561.8753.0	100
Cover with warning symbol over 4 blocks	yellow ADF 4/4 GELB	04.343.6153.8	10
Test adapter, modular	PS WKC/F	Z1.299.9753.0	10
Test plug	ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated	DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Feed-through blocks with tension spring connection


WKFN 6/35


- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 6 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170

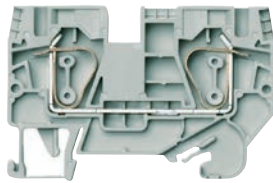






Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 6/35	56.706.0055.0	100
Feed-through block	blue	WKFN 6/35 BLAU	56.706.0055.6	100
General data				
Width / length / height, incl. TS 7.5	8 mm / 66 mm / 45 mm			
Wire strip length	12 mm			
Approvals	PTB     PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.2–6 mm ²			0.2–6 mm ²
Cross section solid/stranded	1.5–10 mm ²			1.5–10 mm ²
Cross section, AWG		24–8	24–8	
Rated current	41 A	50 A	41 A	39/41 A*
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				* 1. value at 40K/ 2. value at 45K
Accessories				
End plate	gray	APFN 6	07.313.0455.0	10
End plate	blue	APFN 6 BLAU	07.313.0455.6	10
Partition	gray	TWFN 6	07.313.0555.0	10

WKFN 6 D1/2/35

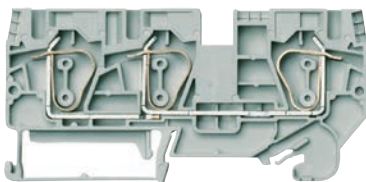- Duo-feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 6 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 6 D1/2/35	56.706.5055.0	100
Feed-through block	blue	WKFN 6 D1/2/35 BLAU	56.706.5055.6	100
General data				
Width / length / height, incl. TS 7.5	8 mm / 90 mm / 45 mm			
Wire strip length	12 mm			
Approvals	PTB     PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.2–6 mm ²			0.2–6 mm ²
Cross section solid/stranded	1.5–10 mm ²			1.5–10 mm ²
Cross section, AWG		24–8	24–8	
Rated current	41 A	50 A	41 A	39/41 A*
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				* 1. value at 40K/ 2. value at 45K
Accessories				
End plate	gray	APFN 6 D1/2	07.313.0655.0	10
End plate	blue	APFN 6 D1/2 BLAU	07.313.0655.6	10
Partition	gray	TWFN 6 D1/2	07.313.0755.0	10


Accessories for *fasis* WKFN 6...




Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated**	2-pole	IVB WKFN 6–2	Z7.282.5227.0	10
	3-pole	IVB WKFN 6–3	Z7.282.5327.0	10
	4-pole	IVB WKFN 6–4	Z7.282.5427.0	10
	5-pole	IVB WKFN 6–5	Z7.282.5527.0	10
Cover with warning symbol over 4 blocks	yellow	ADF 6/4 GELB	04.343.6253.8	10
Test plug		ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated		DIN 5264 B 0,8x4	06.502.4100.0	5

** When cross connectors are used according to EN 60079-0 and EN 60079-7, the current must be reduced to max. 3.5 A.





WKFN 10/35

- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 10 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170

³⁾ Pls. note that the current must be reduced for EX applications.

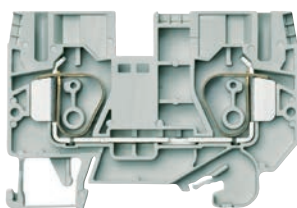


Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 10/35	56.710.0055.0	50
Feed-through block	blue	WKFN 10/35 BLAU	56.710.0055.6	50


General data				
Width / length / height, incl. TS 7.5	10 mm / 72 mm / 50 mm			
Wire strip length	15 mm			
Approvals	PTB   		PTB 06 ATEX 1075 U	
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 10 mm ²			0.2 – 10 mm ²
Cross section solid/stranded	1.5 – 16 mm ²			1.5 – 16 mm ²
Cross section, AWG		16–6	16–6	
Rated current	57 A	60 A	65 A	52/57 A*
Rated voltage	800 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				* 1. value at 40K/ 2. value at 45 K

Accessories	Type	Part No.	Std. Pack	
End plate	gray	APFN 10	07.313.0855.0	10
End plate	blue	APFN 10 BLAU	07.313.0855.6	10
Partition	gray	TWFN 10	07.313.0955.0	10





WKFN 10 D1/2/35

- Duo-feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 10 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170

³⁾ Pls. note that the current must be reduced for EX applications.

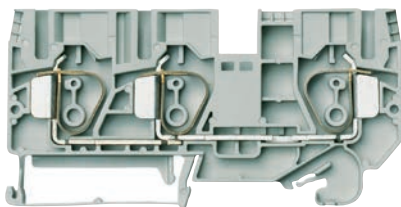


Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 10 D1/2/35	56.710.5055.0	50
Feed-through block	blue	WKFN 10 D1/2/35 BLAU	56.710.5055.6	50

General data				
Width / length / height, incl. TS 7.5	10 mm / 98 mm / 50 mm			
Wire strip length	15 mm			
Approvals	PTB   		PTB 06 ATEX 1075 U	
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 10 mm ²			0.2 – 10 mm ²
Cross section solid/stranded	1.5 – 16 mm ²			1.5 – 16 mm ²
Cross section, AWG		16–6	16–6	
Rated current	57 A	60 A	65 A	52/57 A*
Rated voltage	1000 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				* 1. value at 40K/ 2. value at 45 K

Accessories	Type	Part No.	Std. Pack	
End plate	gray	APFN 10 D1/2	07.313.1055.0	10
End plate	blue	APFN 10 D1/2 BLAU	07.313.1055.6	10
Partition	gray	TWFN 10 D1/2	07.313.1155.0	10

Accessories for *fasis* WKFN 10...

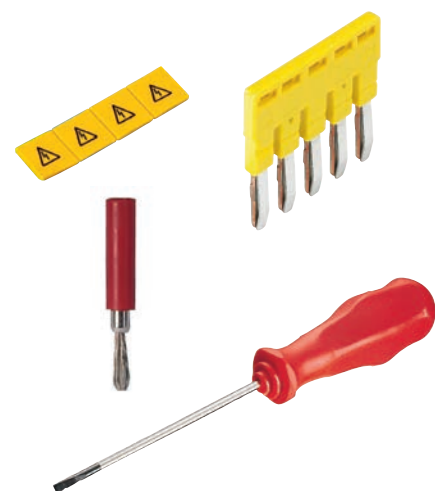


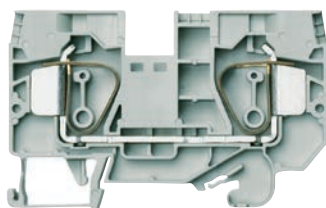
Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated**	2-pole	IVB WKF 10–2	Z7.283.8227.0	10
Reducing jumper, WKF 35 to WKFN 10 ³⁾		IVB WKFN 35R10	Z7.285.6427.0	10
Cover with warning symbol over 4 blocks	yellow	ADF 10/4 GELB	04.343.6453.8	10
Test plug		ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated		DIN 5264 B 1x5,5	06.502.4200.0	5





** When cross connectors are used acc. to EN 60079-0 and EN 60079-7 the current must be reduced to 4 A/40 K or 5 A/45 K for type WKFN 10/35.

Feed-through blocks with tension spring connection


WKFN 16/35


- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 16 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170







Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 16/35	56.716.0055.0	50
Feed-through block	blue	WKFN 16/35 BLAU	56.716.0055.6	100
General data				
Width / length / height, incl. TS 7.5	12 mm / 79 mm / 50 mm			
Wire strip length	16 mm			
Approvals	PTB    PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 16 mm ²			0.2 – 16 mm ²
Cross section solid/stranded	1.5 – 25 mm ²			1.5 – 25 mm ²
Cross section, AWG		16–4	16–4	
Rated current	76 A	85 A	85 A	74/76 A*
Rated voltage	1000 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				* 1. value at 40K/ 2. value at 45K
Accessories				
End plate	gray	APFN 16	07.313.1255.0	10
End plate	blue	APFN 16 BLAU	07.313.1255.6	10
Partition	gray	TWFN 16	07.313.1355.0	10
Cross connector, insulated**	2-pole	IVB WKFN 16–2	Z7.284.4227.0	10
Cover with warning symbol for 4 blocks		ADF 16/4 GELB	04.343.6653.8	10

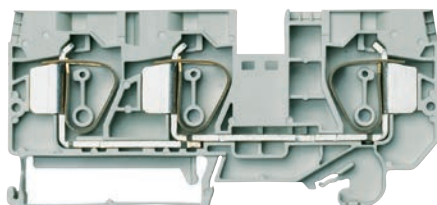
WKFN 16 D1/2/35


- Duo-feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 16 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170







Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 16 D1/2/35	56.716.5055.0	50
Feed-through block	blue	WKFN 16 D1/2/35 BLAU	56.716.5055.6	100
General data				
Width / length / height, incl. TS 7.5	12 mm / 107 mm / 50 mm			
Wire strip length	16 mm			
Approvals	PTB    PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 16 mm ²			0.2 – 16 mm ²
Cross section solid/stranded	1.5 – 25 mm ²			1.5 – 25 mm ²
Cross section, AWG		16–4	16–4	
Rated current	76 A	85 A	85 A	74/76 A*
Rated voltage	1000 V	600 V	600 V	550 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				* 1. value at 40K/ 2. value at 45K
Accessories				
End plate	gray	APFN 16 D1/2	07.313.1455.0	10
End plate	blue	APFN 16 D1/2 BLAU	07.313.1455.6	10
Partition	gray	TWFN 16 D1/2	07.313.1555.0	10
Cross connector, insulated**	2-pole	IVB WKFN 16–2	Z7.284.4227.0	10
Cover with warning symbol for 4 blocks		ADF 16/4 GELB	04.343.6653.8	10

WKFN 35/35

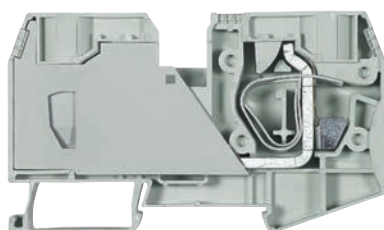- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 35 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack	
Feed-through block	gray	WKFN 35/35	56.735.0053.0	10
Feed-through block	blue	WKFN 35/35 BLAU	56.735.0053.6	10
General data				
Width / length / height, incl. TS 7.5	16 mm / 100 mm / 59 mm			
Wire strip length	25 mm			
Approvals	ATEX    KEMA 03 ATEX 2057 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	2.5 – 35 mm ²			2.5 – 35 mm ²
Cross section solid/stranded	2.5 – 35 mm ²			2.5 – 35 mm ²
Cross section, AWG		12–2	12–2	
Rated current	125 A	115 A	115 A	92/108 A ¹⁾
Rated voltage	800 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note				¹⁾ with/without jumper
Accessories				
Cross connector, insulated	2-pole	IVB WKFN 35-2	Z7.285.6227.0	10

Potential supply with feed-through blocks up to 35 mm²

$I_{\max E}$: I_{\max} supply
 $I_{\max R}$: $I_{\text{reducing cross connector}}$
 I_{N-A} : I_N output terminal blocks

Potential distribution	Distribution on one side		Distribution on both sides	
	2-poles	several poles	2-poles	several poles
35-R-10 I_{\max} supply	125 A	125 A	125 A	125 A
$I_{\text{reducing cross connector}}$	57 A	105 A	57 A	105 A
I_N output terminal blocks	57 A	57 A	57 A	57 A

Potential distribution 35 R 10

- Potential supply 35 mm²
- Reducing cross connector 35R10
- Potential output 10 mm²

Function	Type	Part No.	Std. Pack
Supply block	gray WKF 35 /35	56.735.0053.0	10
Supply block	gray WKF 35 /35 BLAU	56.735.0053.6	10
Reducing cross connector ²⁾	IVB WKFN 35R10	Z7.285.6427.0	10
Output block	gray WKFN 10 /35	56.710.0055.0	10
Output block	blue WKFN 10 /35 BLAU	56.710.0055.6	10
Output block	gray WKFN 10 D1/2/35	56.710.5055.0	10
Output block	blue WKFN 10 D1/2/35 BLAU	56.710.5055.6	10

²⁾ When cross connectors are used acc. to EN 60079-0 and EN 60079-7 the current must be reduced (values to be requested)


Accessories for *fasis* WKFN 16... and WKF 35


Accessories	Type	Part No.	Std. Pack
Test plug	ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated	DIN 5264 B 1x5,5	06.502.4200.0	5



** When cross connectors are used according to EN 60079-0 and EN 60079-7, the current must be reduced to max. 3.5 A.

Ground blocks with tension spring connection


WKF 1,5 SL/35


- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170





Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKF 1,5 SL/35	56.702.9053.0	50
General data				
Width / length / height, incl. TS 7.5	4 mm / 49 mm / 37 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2056 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section, AWG		24–14	24–14	
Rated current				
Rated voltage	500 V	300 V	300 V	440 V*
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5	07.312.8153.0	10
Partition	gray	TWF 1,5	07.312.8253.0	10


WKF 1,5 D1/2/SL/35


- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170

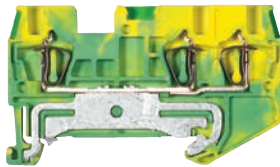



Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKF 1,5 D1/2/SL/35	56.702.9353.0	50
General data				
Width / length / height, incl. TS 7.5	4 mm / 60 mm / 37 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2056 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section, AWG		24–14	24–14	
Rated current				
Rated voltage	500 V	300 V	300 V	440 V*
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5 D1/2	07.312.8353.0	10
Segment end plate		SAPF 1,5	07.312.8953.0	10
Partition	gray	TWF 1,5 D1/2	07.312.8453.0	10


WKF 1,5 D2/2/SL/35

- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170

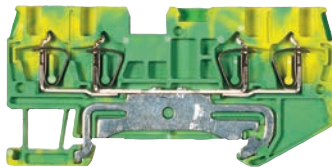

Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKF 1,5 D2/2/SL/35	56.702.9153.0	50
General data				
Width / length / height, incl. TS 7.5	4 mm / 72 mm / 37 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2056 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section, AWG		24–14	24–14	
Rated current				
Rated voltage	500 V	300 V	300 V	440 V*
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5 D2/2	07.312.8553.0	10
Segment end plate		SAPF 1,5	07.312.8953.0	10
Partition	gray	TWF 1,5 D2/2	07.312.8653.0	10


Accessories for *fasis* WKF 1,5...

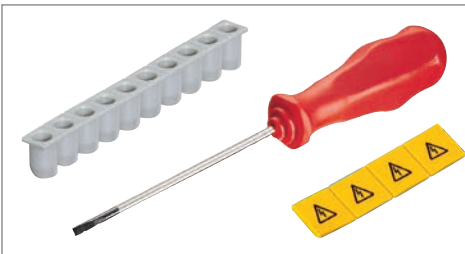










Accessories	Type	Part No.	Std. Pack	
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.564.4253.0	100
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.564.4353.0	100
Cover with warning symbol over 5 blocks	yellow	ADF 1,5/5 GELB	04.343.6953.8	10
Screwdriver, uninsulated		DIN 5264 B 0,4x2,5	06.502.4300.0	5

* In order to maintain the proper isolation distances, the open side of a ground block is to be covered by an end plate.


WKFN 2,5 SL/35


- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170








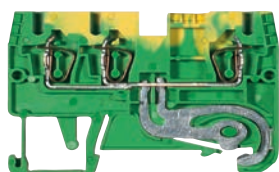


Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 2,5 SL/35	56.703.9055.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 47 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB        PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current				
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5	07.312.6755.0	10


WKFN 2,5 D1/2/SL/35

- Duo-Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170











Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 2,5 D1/2/SL/35	56.703.9355.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 60 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB        PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current				
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 D1/2	07.312.6955.0	10


WKFN 2,5 D2/2/SL/35

- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 2,5 D2/2/SL/35	56.703.9155.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 72 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB        PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current				
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 D2/2	07.312.7155.0	10


Accessories for *fasis* WKFN 2,5...

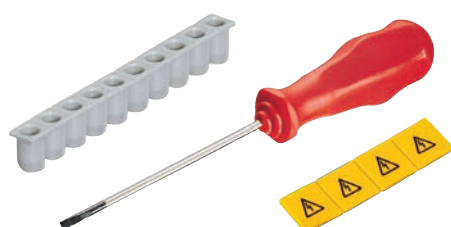








Accessories	Type	Part No.	Std. Pack	
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm ²	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm ²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
Cover with warning symbol over 4 blocks	yellow	ADFN 2,5/4 GELB	04.343.8353.8	10
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Ground blocks with tension spring connection


WKFN 4 SL/35

- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170










Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 4 SL/35	56.704.9055.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 51 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section solid/stranded	0.13–6 mm ²			0.2–6 mm ²
Cross section, AWG		24–10	24–10	
Rated current				
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 4	07.312.9255.0	10


WKFN 4 D1/2/SL/35


- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170










Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 4 D1/2/SL/35	56.704.9355.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 67 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section solid/stranded	0.13–6 mm ²			0.2–6 mm ²
Cross section, AWG		24–10	24–10	
Rated current				
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 4 D1/2	07.312.9455.0	10

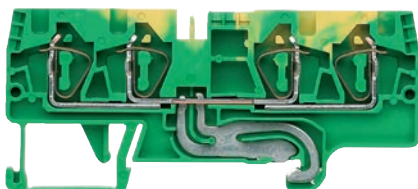
WKFN 4 D2/2/SL/35

- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 4 D2/2/SL/35	56.704.9155.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 82 mm / 38 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section solid/stranded	0.13–6 mm ²			0.2–6 mm ²
Cross section, AWG		24–10	24–10	
Rated current				
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 4 D2/2	07.312.9055.0	10


Accessories for *fasis* WKFN 4...

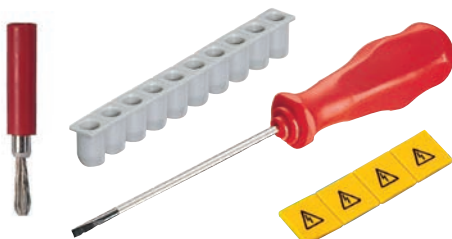






Accessories	Type	Part No.	Std. Pack	
Wire entry guide	0.13–0.2 mm ²	LEL 4/1 WEISS	05.561.8553.0	100
	0.25–0.5 mm ²	LEL 4/2 GRAU	05.561.8653.0	100
	0.75–1.0 mm ²	LEL 4/3 SCHWARZ	05.561.8753.0	100
Cover with warning symbol over 4 blocks	yellow	ADF 4/4 GELB	04.343.6153.8	10
Test plug		ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10


WKFN 6 SL/35

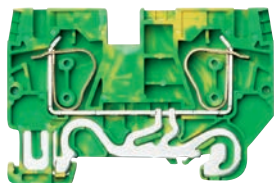- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 6 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170








Description	Type	Part No.	Std. Pack
Ground block green/yellow	WKFN 6 SL/35	56.706.9055.0	100
General data			
Width / length / height, incl. TS 7.5	8 mm / 66 mm / 45 mm		
Wire strip length	12 mm		
Approvals	PTB     PTB 06 ATEX 1075 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	0.2–6 mm ²		0.2–6 mm ²
Cross section solid/stranded	1.5–10 mm ²		1.5–10 mm ²
Cross section, AWG		24–8	24–8
Rated current			
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate gray	APFN 6	07.313.0455.0	10


WKFN 6 D1/2/SL/35

- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 6 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack
Ground block green/yellow	WKFN 6 D1/2/SL/35	56.706.9355.0	100
General data			
Width / length / height, incl. TS 7.5	8 mm / 90 mm / 45 mm		
Wire strip length	12 mm		
Approvals	PTB     PTB 06 ATEX 1075 U		
Technical data	IEC	UL	CSA 
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	0.2–6 mm ²		0.2–6 mm ²
Cross section solid/stranded	1.5–10 mm ²		1.5–10 mm ²
Cross section, AWG		24–8	24–8
Rated current		50 A	
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate gray	APFN 6 D1/2	07.313.0655.0	10

Accessories for *fasis* WKFN 6...

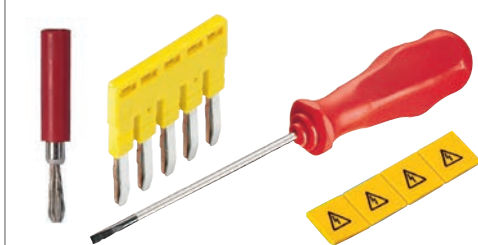


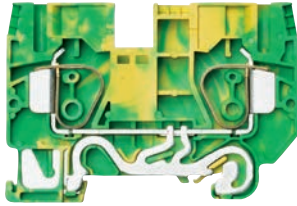
Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated*	2-pole	IVB WKFN 6–2	Z7.282.5227.0	10
	3-pole	IVB WKFN 6–3	Z7.282.5327.0	10
	4-pole	IVB WKFN 6–4	Z7.282.5427.0	10
	5-pole	IVB WKFN 6–5	Z7.282.5527.0	10
	Cover with warning symbol over 4 blocks	yellow	ADF 6/4 GELB	04.343.6253.8
Test plug		ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated		DIN 5264 B 0,8x4	06.502.4100.0	5





* When cross connectors are used according to EN 60079-0 and EN 60079-7, the current must be reduced to max. 3.5 A.

Ground blocks with tension spring connection

WKFN 10 SL/35


- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 10 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170







Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 10 SL/35	56.710.9055.0	50
General data				
Width / length / height, incl. TS 7.5	10 mm / 72 mm / 50 mm			
Wire strip length	15 mm			
Approvals	PTB    PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 10 mm ²			0.2 – 10 mm ²
Cross section solid/stranded	1.5 – 16 mm ²			1.5 – 16 mm ²
Cross section, AWG		16–6	16–6	
Rated current				
Rated voltage	1000 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 10/35	07.313.0855.0	10


WKFN 10 D1/2/SL/35

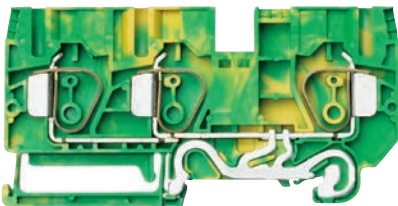
- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 10 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170







Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 10 D1/2/SL/35	56.710.9355.0	50
General data				
Width / length / height, incl. TS 7.5	10 mm / 98 mm / 50 mm			
Wire strip length	15 mm			
Approvals	PTB    PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 10 mm ²			0.2 – 10 mm ²
Cross section solid/stranded	1.5 – 16 mm ²			1.5 – 16 mm ²
Cross section, AWG			16–6	
Rated current				
Rated voltage	1000 V		600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 10 D1/2	07.313.1055.0	10


WKFN 16 SL/35


- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 16 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170

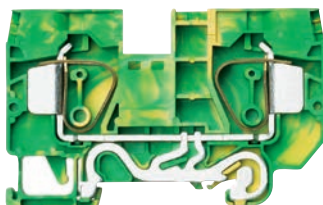






Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 16 SL/35	56.716.9055.0	50
General data				
Width / length / height, incl. TS 7.5	12 mm / 79 mm / 50 mm			
Wire strip length	16 mm			
Approvals	PTB    PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 16 mm ²			0.2 – 16 mm ²
Cross section solid/stranded	1.5 – 25 mm ²			1.5 – 25 mm ²
Cross section, AWG		16–4	16–4	
Rated current				
Rated voltage	1000 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 16	07.313.1255.0	10

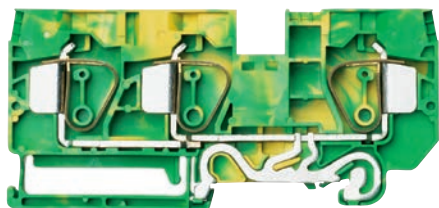
WKFN 16 D1/2/SL/35

- Duo ground block with tension spring connection for mounting on TS 35
- Nominal cross section 16 mm²
- Ex e II  II 2GD IM2
Follow the EX installation instructions on page 170








Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKFN 16 D1/2/SL/35	56.716.9355.0	50
General data				
Width / length / height, incl. TS 7.5	12 mm / 107 mm / 50 mm			
Wire strip length	16 mm			
Approvals	PTB     PTB 06 ATEX 1075 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.2 – 16 mm ²			0.2 – 16 mm ²
Cross section solid/stranded	1.5 – 25 mm ²			1.5 – 25 mm ²
Cross section, AWG			16–4	
Rated current				
Rated voltage	1000 V		600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 16 D1/2	07.313.1455.0	10


WKF 35 SL/35

- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 35 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WKF 35 SL/35	56.735.9053.0	10
General data				
Width / length / height, incl. TS 7.5	16 mm / 100 mm / 59 mm			
Wire strip length	25 mm			
Approvals	ATEX     KEMA 03 ATEX 2057 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	2.5 – 35 mm ²			2.5 – 35 mm ²
Cross section solid/stranded	2.5 – 35 mm ²			2.5 – 35 mm ²
Cross section, AWG		12–2	12–2	
Rated current				
Rated voltage	800 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
Cross connector, insulated	2-pole	IVB WKF 35–2	Z7.285.6227.0	10
Cover with warning symbol over 4 blocks		ADF 35/5 GELB	04.343.9253.8	10
Test plug		ST 2/2,3	Z5.553.2921.0	10

Accessories for *fasis* WKFN 10 SL/... and WKFN 16 SL/...

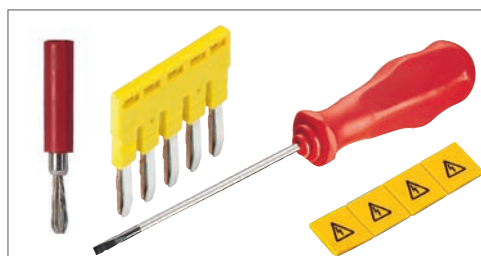


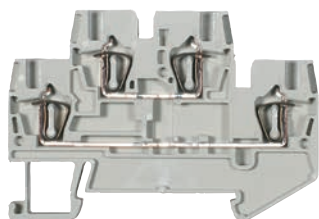
Accessories	Type	Part No.	Std. Pack	
Test plug	ST 2/2,3	Z5.553.2921.0	10	
Screwdriver, uninsulated	DIN 5264 B 1x5,5	06.502.4200.0	5	
for WKFN 10 ...				
Cross connector, insulated**	2-pole	IVB WKF 10–2	Z7.283.8227.0	10
Cover with warning symbol over 4 blocks	yellow	ADF 10/4 GELB	04.343.6453.8	10
for WKFN 16 ...				
Cross connector, insulated*	2-pole	IVB WKF 16–2	Z7.284.4227.0	10
Cover with warning symbol over 4 blocks	yellow	ADF 16/4 GELB	04.343.6653.8	10



** When cross connectors are used acc. to EN 60079-0 and EN 60079-7 the current must be reduced to 4 A/40 K or 5 A/45 K for type WKFN 10/35.

Multi-tier terminal blocks with tension spring connection


WKF 1,5 E2/35


- Multi-tier block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170





Description	Type	Part No.	Std. Pack	
Multi-tier block	gray	WKF 1,5 E2/35	56.702.7653.0	50
General data				
Width / length / height, incl. TS 7.5	4 mm / 68 mm / 47 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2056 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section, AWG		26–14	26–14	
Rated current	17,5 A	15 A	15 A	15/13,5 A ¹⁾
Rated voltage	500 V	300 V	300 V	440 V ²⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5 E2	07.312.8753.0	10
Partition	gray	TWF 1,5 E2	07.312.8853.0	10
Cross connector, insulated	2-pole	IVB WKF 1,5–2	Z7.268.0227.0	10
	5-pole	IVB WKF 1,5–5	Z7.268.0527.0	10
	10-pole	IVB WKF 1,5–10	Z7.268.1027.0	10
	20-pole	IVB WKF 1,5–20	Z7.268.2027.0	10
Marking tag carrier, 2-fold		BT 4/2	04.243.0953.0	100


WKF 1,5 E2/VB/35


- Multi-tier block, vertically connected, with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170


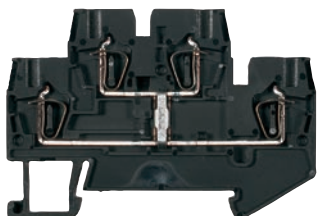


Description	Type	Part No.	Std. Pack	
Multi-tier block	black	WKF 1,5 E2/VB/35	56.702.6953.1	50
General data				
Width / length / height, incl. TS 7.5	4 mm / 68 mm / 47 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2056 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section, AWG		26–14	26–14	
Rated current	17,5 A	15 A	15 A	15/13,5 A ¹⁾
Rated voltage	500 V	300 V	300 V	440 V ²⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5 E2	07.312.8753.0	10
Partition	gray	TWF 1,5 E2	07.312.8853.0	10
Cross connector, insulated	2-pole	IVB WKF 1,5–2	Z7.268.0227.0	10
	5-pole	IVB WKF 1,5–5	Z7.268.0527.0	10
	10-pole	IVB WKF 1,5–10	Z7.268.1027.0	10
	20-pole	IVB WKF 1,5–20	Z7.268.2027.0	10
Marking tag carrier, 2-fold		BT 4/2	04.243.0953.0	100

WKF 1,5 E2/SL/35

- Multi-tier ground block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170

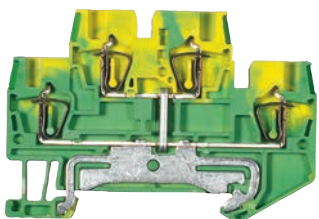


Description	Type	Part No.	Std. Pack	
Multi-tier ground block	green/yellow	WKF 1,5 E2/SL/35	56.702.9253.0	50
General data				
Width / length / height, incl. TS 7.5	4 mm / 68 mm / 47 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2056 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section solid/stranded	0.08–1.5 mm ²			0.14–1.5 mm ²
Cross section, AWG		26–14	26–14	
Rated current				
Rated voltage	500 V	300 V	300 V	²⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5 E2	07.312.8753.0	10
Partition	gray	TWF 1,5 E2	07.312.8853.0	10
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.564.4253.0	10
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.564.4353.0	10
Cover with warning symbol over 5 blocks		ADF 1,5/5 GELB	04.343.6953.8	10
Marking tag carrier, 2-fold		BT 4/2	04.243.0953.0	100


¹⁾ Rated current when using cross connectors

²⁾ For maintaining the proper isolation distances, the open side of a feed-through terminal block as well as both sides of a jumper are to be covered by partitions.





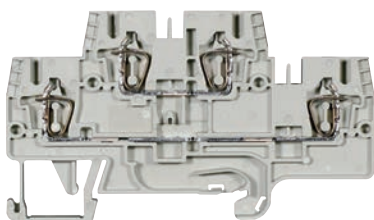

Multi-tier blocks with tension spring connection

WKFN 2,5 E/35 WKFN 2,5 E/N/D/35

- Multi-tier block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E/35	56.703.7055.0
Multi-tier block, combined	gray	WKFN 2,5 E/N/D/35	56.703.7655.0


General data				
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current	24 A	20 A	24 A	20/21,5 A ¹⁾
Rated voltage	500 V	300 V	300 V	440/275 V ²⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ 1. value at 40 K / 2. value at 45 K ²⁾ When using cross connectors on the upper tier			

WKFN 2,5 E/N/D/35







	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Feed-through	gray

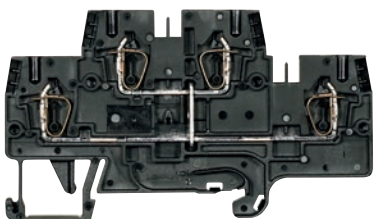WKFN 2,5 E/VB/35


- Multi-tier block, vertically connected, with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Multi-tier block	black	WKFN 2,5 E/VB/35	56.703.6955.1





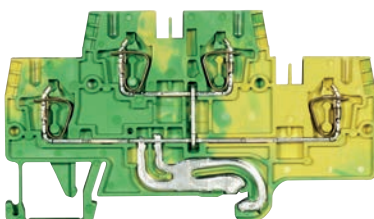

General data				
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current	24 A	20 A	24 A	20/21,5 A ¹⁾
Rated voltage	500 V	600 V	600 V	440 V
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ 1. value at 40 K / 2. value at 45 K			

WKFN 2,5 E/SL/35

- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Ground block	green/yellow	WKFN 2,5 E/SL/35	56.703.8955.0

General data				
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current				
Rated voltage	500 V	600 V	600 V	
Rated impulse voltage	6 kV			
Pollution degree	3			

Multi-tier blocks with tension spring connection

WKFN 2,5 E-K


- Multi-tier block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

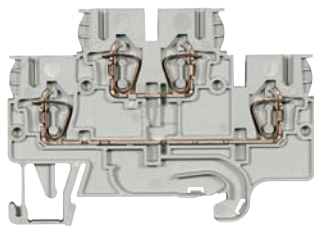

Description	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E-K	56.703.4755.0
General data			
Width / length / height, incl. TS 7.5	5 mm / 68 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1	pending	pending
Cross section fine-stranded	0.13–2.5 mm ²		
Cross section solid/stranded	0.13–4 mm ²		
Cross section, AWG			
Rated current	24 A		
Rated voltage	500 V		
Rated impulse voltage	6 kV		
Pollution degree	3		

WKFN 2,5 EVB-K


- Multi-tier block, vertically connected, with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

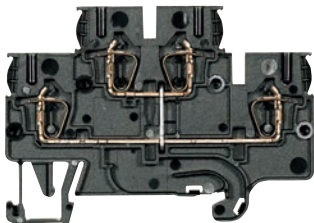

Description	Type	Part No.	Std. Pack
Multi-tier block	black	WKFN 2,5 EVB-K	56.703.4855.1
General data			
Width / length / height, incl. TS 7.5	5 mm / 68 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1	pending	pending
Cross section fine-stranded	0.13–2.5 mm ²		
Cross section solid/stranded	0.13–4 mm ²		
Cross section, AWG			
Rated current	24 A		
Rated voltage	500 V		
Rated impulse voltage	6 kV		
Pollution degree	3		

WKFN 2,5 ESL-K


- Ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

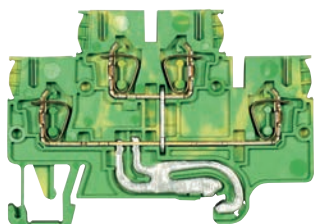

Description	Type	Part No.	Std. Pack
Ground block	green/yellow	WKFN 2,5 ESL-K	56.703.4955.0
General data			
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 68 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-2	pending	pending
Cross section fine-stranded	0.13–2.5 mm ²		
Cross section solid/stranded	0.13–4 mm ²		
Cross section, AWG			
Rated current			
Rated voltage	500 V		
Rated impulse voltage	6 kV		
Pollution degree	3		

WKFN 2,5 E/D/SL/35 WKFN 2,5 E/N/SL/35

- Multi-tier block, combined, with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

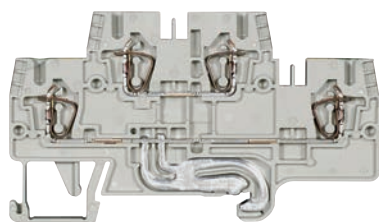

Description	Type	Part No.	Std. Pack	
Multi-tier block, combined	gray	WKFN 2,5 E/D/SL/35	56.703.7855.0	100
Multi-tier block, combined	gray	WKFN 2,5 E/N/SL/35	56.703.7755.0	100

General data			
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.13–2.5 mm ²		
Cross section solid/stranded	0.13–4 mm ²		
Cross section, AWG		22–12	24–12
Rated current	24 A	20 A	24 A
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WKFN 2,5 E/D/SL/35


	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow

WKFN 2,5 E/N/SL/35

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Ground conductor	green/yellow

WKFN 2,5 E...G

- Multi-tier function block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

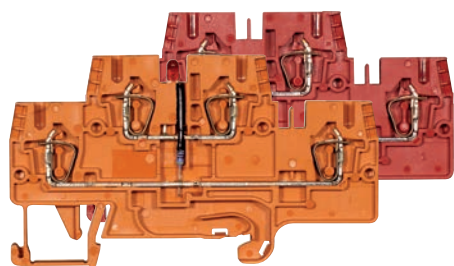

Description	Type	Part No.	Std. Pack	
Multi-tier function block	red	WKFN 2,5 E.../35	56.703.XX55.5	100
Multi-tier function block	orange	WKFN 2,5 E.../35	56.703.XX55.9	100

General data			
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG		22–12	24–12

Function diagram for fasis WKFN 2,5 E...

The multi-tier block is available on request as a function block for a wide variety of switching tasks.

56.703.7555.9 56.703.7555.5		56.703.8255.5		I = 1 A U = 1000 V	56.703.7455.9 LED red		R = 4.7 kΩ P = 0.5 W U = 24 V DC
56.703.7155.5 56.703.7155.9		56.703.7955.5		I = 1 A U = 1000 V	56.703.7255.5 LED red		R = 4.7 kΩ P = 0.5 W U = 24 V DC
56.703.8055.9		56.703.8355.5		I = 1 A U = 1000 V	56.703.7355.5		R = 680 kΩ P = 0.25 W U = 100-500 V


Accessories for fasis WKFN 2,5 E/...




Accessories	Type	Part No.	Std. Pack	
End plate	gray	APFN 2,5 E	07.312.7355.0	10
Partition	gray	WFN 2,5 E	07.312.7455.0	10
Cross connector, insulated	2-pole	IVB WKF 2,5–2	Z7.280.6227.0	10
	3-pole	IVB WKF 2,5–3	Z7.280.6327.0	10
	4-pole	IVB WKF 2,5–4	Z7.280.6427.0	10
	5-pole	IVB WKF 2,5–5	Z7.280.6527.0	10
	10-pole	IVB WKF 2,5–10	Z7.280.7027.0	20
Vertical cross connector	20-pole	IVB WKF 2,5–20	Z7.280.8027.0	20
	1-pole	IVB WKF–V	Z7.261.1127.0	10
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm ²	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm ²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
Cover with warning symbol over 4 blocks	yellow	ADFN 2,5/4 GELB	04.343.8353.8	10
Marking tag carrier, 3-fold		BT 5/3	04.243.0755.0	100






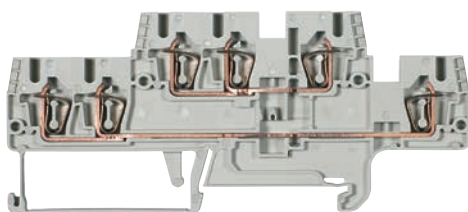

Duo multi-tier terminal blocks with tension spring connection

WKFN 2,5 E1/2/35 WKFN 2,5 E1/2/N/D/35


- Duo multi-tier block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E1/2/35	56.703.6055.0
Multi-tier block, combined	gray	WKFN 2,5 E1/2/N/D/35	56.703.6355.0






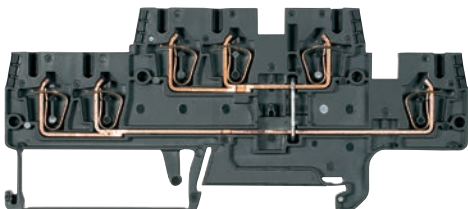

General data				
Width / length / height, incl. TS 7.5	5 mm / 107 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current	22 A	20 A	24 A	20/21 A ¹⁾
Rated voltage	500 V	300 V	300 V	440/275 V ²⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ 1. value at 40 K / 2. value at 45 K ²⁾ When using cross connectors on the upper tier			

WKFN 2,5 E1/2/VB/35

- Duo multi-tier block, vertically connected, with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




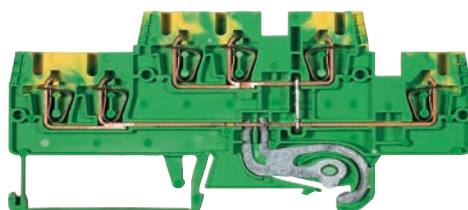
Description	Type	Part No.	Std. Pack
Multi-tier block	black	WKFN 2,5 E1/2/VB/35	56.703.5955.1

General data				
Width / length / height, incl. TS 7.5	5 mm / 107 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current	22 A	20 A	24 A	20/21 A ¹⁾
Rated voltage	500 V	300 V	300 V	440 V
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ 1. value at 40 K / 2. value at 45 K			








Accessories	Type	Part No.	Std. Pack
Partition	gray	TWFN 2,5 E1/2	07.312.7855.0
			10

WKFN 2,5 E1/2/SL/35

- Duo multi-tier ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Ground block	green/yellow	WKFN 2,5 E1/2/SL/35	56.703.6255.0

General data				
Width / length / height, incl. TS 7.5	5 mm / 107 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB       PTB 04 ATEX 1051 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section, AWG		22–12	24–12	
Rated current				
Rated voltage	500 V	600 V	600 V	
Rated impulse voltage	6 kV			
Pollution degree	3			

WKFN 2,5 E1/2/D/SL/35
WKFN 2,5 E1/2/N/SL/35

- Duo multi-tier block, combined, with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

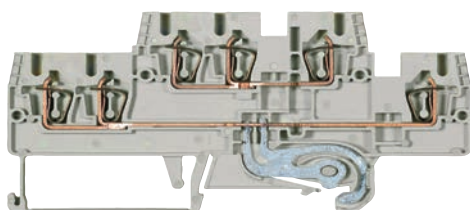

Description	Type	Part No.	Std. Pack
Multi-tier block, combined	gray	WKFN 2,5 E1/2/D/SL/35	56.703.6155.0
Multi-tier block, combined	gray	WKFN 2,5 E1/2/N/SL/35	56.703.6455.0

General data			
Width / length / height, incl. TS 7.5	5 mm / 107 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.13–2.5 mm ²		
Cross section solid/stranded	0.13–4 mm ²		
Cross section, AWG		22–12	24–12
Rated current	22 A	20 A	24 A
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WKFN 2,5 E1/2/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Feed-through	gray

WKFN 2,5 E1/2/D/SL/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow

WKFN 2,5 E1/2/N/D/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Feed-through	gray

WKFN 2,5 E1/2/N/SL/35 Block color: gray

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Ground conductor	green/yellow

WKFN 2,5 E1/2/VB/35 Block color: black

	Function	Color ID
Upper tier	Feed-through	black
Lower tier	vert. jumpered	black

WKFN 2,5 E1/2/SL/35 Block color: green/yellow

	Function	Color ID
Upper tier	Ground conductor	green/yellow
Lower tier	vert. jumpered	green/yellow


Accessories for fasis WKFN 2,5 E1/2/...










Accessories	Type	Part No.	Std. Pack
End plate	gray	APFN 2,5 E1/2	07.312.7755.0
Partition	gray	TWFN 2,5 E1/2	07.312.7855.0
Cross connector, insulated	2-pole	IVB WKF 2,5–2	Z7.280.6227.0
	3-pole	IVB WKF 2,5–3	Z7.280.6327.0
	4-pole	IVB WKF 2,5–4	Z7.280.6427.0
	5-pole	IVB WKF 2,5–5	Z7.280.6527.0
	10-pole	IVB WKF 2,5–10	Z7.280.7027.0
	20-pole	IVB WKF 2,5–20	Z7.280.8027.0
Vertical cross connector	1-pole	IVB WKF–V	Z7.261.1127.0
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0
	0.25–0.5 mm ²	LELN 2,5/2 GRAU	05.564.3855.0
	0.75–1.0 mm ²	LELN 2,5/3 SCHWARZ	05.564.3955.0
Cover with warning symbol over 4 blocks	yellow	ADFN 2,5/4 GELB	04.343.8353.8
Marking tag carrier, 2-fold		BT 5/2	04.243.0855.0
Test adapter, modular		PS WKC/F	Z1.299.9753.0
Test plug		ST 2/2,3	Z5.553.2921.0
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0

Multi-tier terminal blocks with tension spring connection

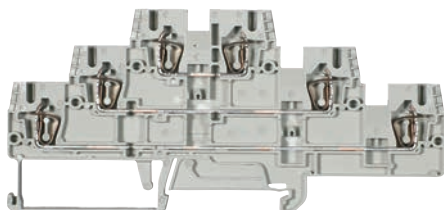
WKFN 2,5 E3/35


- Multi-tier block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170









Description	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E3/35	56.703.3055.0
General data			
Width / length / height, incl. TS 7.5	5 mm / 123 mm / 59 mm		
Wire strip length	11 mm		
Approvals	PTB       PTB 04 ATEX 1051 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-1		EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²		0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²		0.13–4 mm ²
Cross section, AWG		22–12	24–12
Rated current	20 A	20 A	19/20 A ¹⁾
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		440/275 V ²⁾
Pollution degree	3		
Note	¹⁾ 1. value at 40 K / 2. value at 45 K ²⁾ When using cross connectors on the upper tier		

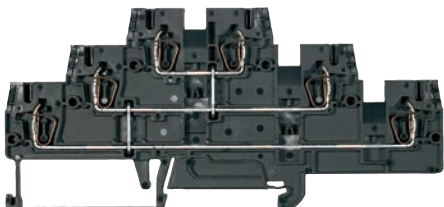
WKFN 2,5 E3/VB/35


- Multi-tier block, vertically connected, with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170







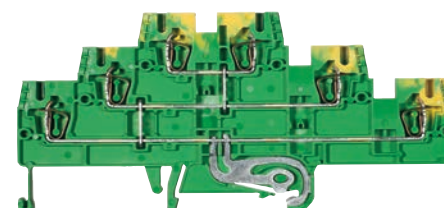

Description	Type	Part No.	Std. Pack
Multi-tier block	black	WKFN 2,5 E3/VB/35	56.703.2955.1
General data			
Width / length / height, incl. TS 7.5	5 mm / 123 mm / 59 mm		
Wire strip length	11 mm		
Approvals	PTB       PTB 04 ATEX 1051 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-1		EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²		0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²		0.13–4 mm ²
Cross section, AWG		22–12	24–12
Rated current	20 A	20 A	20/21 A ¹⁾
Rated voltage	500 V	600 V	600 V
Rated impulse voltage	6 kV		440 V
Pollution degree	3		
Note	¹⁾ 1. value at 40 K / 2. value at 45 K		

WKFN 2,5 E3/SL/35

- Multi-tier ground block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Multi-tier ground block	green/yellow	WKFN 2,5 E/SL/35	56.703.8855.0
General data			
Width / length / height, incl. TS 7.5	5 mm / 123 mm / 59 mm		
Wire strip length	11 mm		
Approvals	PTB       PTB 04 ATEX 1051 U		
Technical data	IEC	UL	CSA
	EN 60 947-7-2		EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²		0.2–2.5 mm ²
Cross section solid/stranded	0.13–4 mm ²		0.13–4 mm ²
Cross section, AWG		22–12	24–12
Rated current			
Rated voltage	500 V	600 V	600 V
Rated impulse voltage	6 kV		
Pollution degree	3		

Multi-tier/Motor connection block with tension spring connection

WKFN 2,5 E3/D/D/SL/35 WKFN 2,5 E3/N/D/SL/35

- Multi-tier block, combined, with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

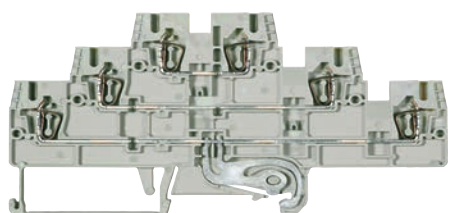


Description	Type	Part No.	Std. Pack
Multi-tier block	gray	WKFN 2,5 E3/D/D/SL/35	56.703.3355.0
Multi-tier block	gray	WKFN 2,5 E3/N/D/SL/35	56.703.3255.0

General data			
Width / length / height, incl. TS 7.5	5 mm / 123 mm / 59 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.13–2.5 mm ²		
Cross section solid/stranded	0.13–4 mm ²		
Cross section, AWG		22–12	24–12
Rated current	20 A	20 A	24 A
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		

WKFN 2,5 E3/N/D/SL/35			WKFN 2,5 E3/D/D/SL/35		
Block color: gray			Block color: gray		
	Function	Color ID		Function	Color ID
Upper tier	Feed-through	blue	Upper tier	Feed-through	gray
Center tier	Feed-through	gray	Center tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow	Lower tier	Ground conductor	green/yellow

WKF 4 3D/SL


- Motor connection block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²

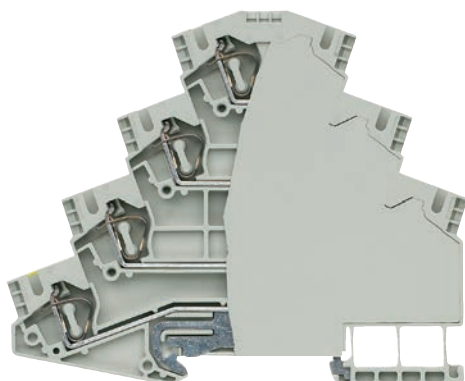

Description	Type	Part No.	Std. Pack
Motor connection block	gray	WKF 4 3D/SL	56.704.8453.0

General data			
Width / length / height, incl. TS 7.5	6 mm / 100 mm / 84 mm		
Wire strip length	10 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1/DIN VDE 0611 T1		
Cross section fine-stranded	0.13 – 4 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG		28–10	28–10
Rated current	28 A	30 A	30 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories for *fasis* WKFN 2,5 E3/...

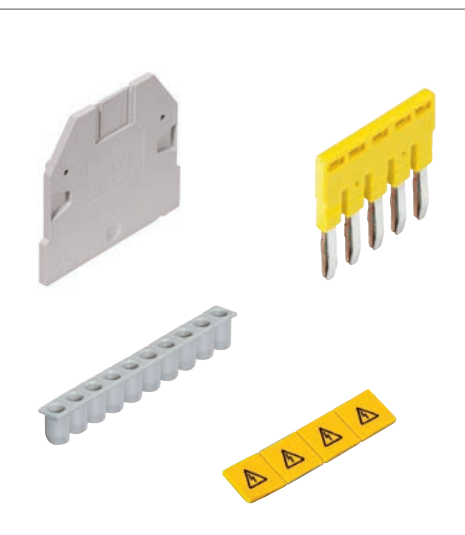


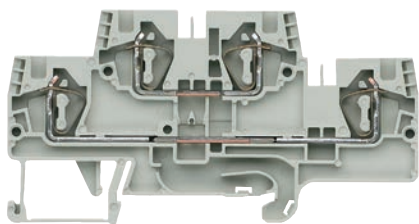
Accessories	Type	Part No.	Std. Pack
End plate	gray	APFN 2,5 E3	07.312.7555.0
Partition	gray	TWFN 2,5 E3	07.312.7655.0
Cross connector, insulated	2-pole	IVB WKF 2,5–2	Z7.280.6227.0
	3-pole	IVB WKF 2,5–3	Z7.280.6327.0
	4-pole	IVB WKF 2,5–4	Z7.280.6427.0
	5-pole	IVB WKF 2,5–5	Z7.280.6527.0
	10-pole	IVB WKF 2,5–10	Z7.280.7027.0
	20-pole	IVB WKF 2,5–20	Z7.280.8027.0
Vertical cross connector	1-pole	IVB WKF–V	Z7.261.1127.0
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0
	0.25–0.5 mm ²	LELN 2,5/2 GRAU	05.564.3855.0
	0.75–1.0 mm ²	LELN 2,5/3 SCHWARZ	05.564.3955.0
Cover with warning symbol over 4 blocks	yellow	ADFN 2,5/4 GELB	04.343.8353.8
Marking tag carrier, 2-fold		BT 5/2	04.243.0855.0

Multi-tier terminal blocks with tension spring connection







WKFN 4 E/35

WKFN 4 E/N/D/35

- Multi-tier block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Multi-tier block	gray WKFN 4 E/35	56.704.7055.0	100
Multi-tier block, combined	gray WKFN 4 E/N/D/35	56.704.7655.0	100


General data				
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB      PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section solid/stranded	0.13–6 mm ²			0.2–6 mm ²
Cross section, AWG		24–10	24–10	
Rated current	32 A	30 A	32 A	27/29 A ¹⁾²⁾
Rated voltage	500 V	300 V	300 V	440/352 V ³⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ 1. value at 40 K / 2. value at 45 K ²⁾ When cross connectors are used acc. to EN 60079-0 and EN60079-7 the current must be reduced to 2 A at 45 K. ³⁾ When using cross connectors on the upper tier			

WKFN 4 E/N/D/35 Block color: gray





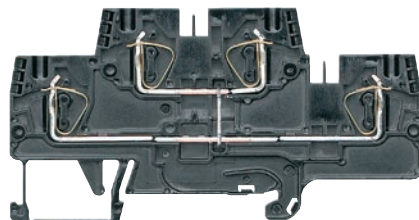

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Feed-through	gray

WKFN 4 E/VB/35


- Multi-tier block, vertically connected, with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Multi-tier block	black WKFN 4 E/VB/35	56.704.6955.1	100







General data				
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB      PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section solid/stranded	0.13–6 mm ²			0.2–6 mm ²
Cross section, AWG		24–10	24–10	
Rated current	32 A	30 A	32 A	30/31 A ¹⁾
Rated voltage	500 V	600 V	300 V	440 V
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ 1. value at 40 K / 2. value at 45 K			

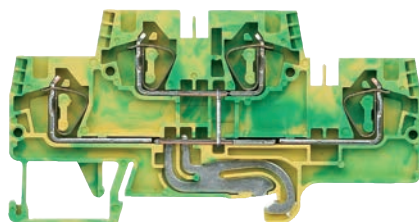WKFN 4 E/SL/35

- Multi-tier ground block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170




Description	Type	Part No.	Std. Pack
Multi-tier ground block	green/yellow WKFN 4 E SL/35	56.704.9255.0	100

General data				
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 48 mm			
Wire strip length	11 mm			
Approvals	PTB      PTB 05 ATEX 1104 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–4 mm ²			0.13–4 mm ²
Cross section solid/stranded	0.13–6 mm ²			0.2–6 mm ²
Cross section, AWG		24–10	24–10	
Rated current				
Rated voltage	500 V	600 V	600 V	
Rated impulse voltage	6 kV			
Pollution degree	3			

Multi-tier terminal blocks with tension spring connection

WKFN 4 E/D/SL/35 WKFN 4 E/N/SL/35

- Multi-tier block, combined, with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²
- Ex e I/II II 2GD IM2
Follow the EX installation instructions on page 170

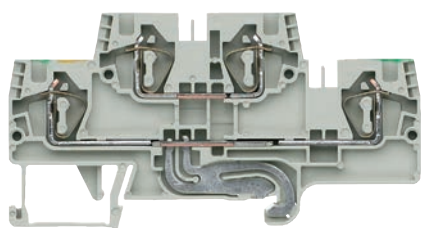

Description	Type	Part No.	Std. Pack	
Multi-tier block, combined	gray	WKFN 4 E/D/SL/35	56.704.7855.0	100
Multi-tier block, combined	gray	WKFN 4 E/N/SL/35	56.704.7755.0	100

General data			
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.13–4 mm ²		
Cross section solid/stranded	0.13–6 mm ²		
Cross section, AWG		24–10	24–10
Rated current	32 A	30 A	32 A
Rated voltage	500 V	300 V	300 V
Rated impulse voltage	6 kV		
Pollution degree	3		


WKFN 4 E/D/SL/35 Block color: gray **WKFN 4 E/N/SL/35** Block color: gray

	Function	Color ID
Upper tier	Feed-through	gray
Lower tier	Ground conductor	green/yellow

	Function	Color ID
Upper tier	Feed-through	blue
Lower tier	Ground conductor	green/yellow

WKFN 4 E /35...

- Multi-tier function block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²

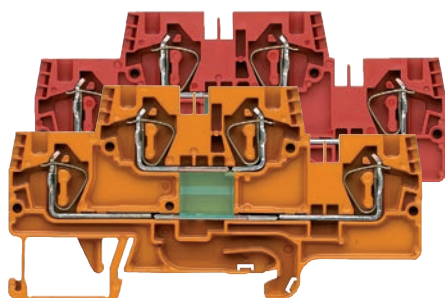

Description	Type	Part No.	Std. Pack	
Multi-tier function block	red	WKFN 4 E /35...	56.704.XX55.5	100
Multi-tier function block	orange	WKFN 4 E /35...	56.704.XX55.9	100


General data			
Width / length / height, incl. TS 7.5	6 mm / 90 mm / 48 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 4 mm ²		
Cross section solid/stranded	0.13 – 6 mm ²		
Cross section, AWG		24–10	24–10

Function diagram for fasis WKFN 4 E/...

The multi-tier block is available on request as a function block for a wide variety of switching tasks.

56.704.7555.9 56.704.7555.5					
56.704.8255.5		I = 1 A U = 1000 V	56.704.7455.9 LED red		R = 4.7 kΩ P = 0.5 W U = 24 V DC
56.704.7155.5 56.704.7155.9			56.704.7255.5 LED red		R = 4.7 kΩ P = 0.5 W U = 24 V DC
56.704.8055.9		I = 1 A U = 1000 V	56.704.8355.5		R = 680 kΩ P = 0.25 W U = 100-500 V

Accessories for fasis WKFN 4 E/...

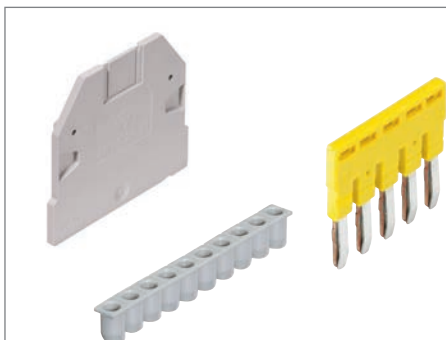


Accessories	Type	Part No.	Std. Pack	
End plate	gray	APFN 4 E...	07.312.9655.0	10
Partition	gray	TWFN 4 E...	07.312.9755.0	10
Cross connector, insulated	2-pole	IVB WKF 4–2	Z7.261.1227.0	10
	3-pole	IVB WKF 4–3	Z7.261.1327.0	10
	4-pole	IVB WKF 4–4	Z7.261.1427.0	10
	5-pole	IVB WKF 4–5	Z7.261.1527.0	10
	6-pole	IVB WKF 4–6	Z7.261.1627.0	10
	7-pole	IVB WKF 4–7	Z7.261.1727.0	20
	8-pole	IVB WKF 4–8	Z7.261.1827.0	20
	9-pole	IVB WKF 4–9	Z7.261.1927.0	20
	10-pole	IVB WKF 4–10	Z7.261.2027.0	20
	Vertical cross connector, insulated	1-pole	IVB WKF-V	Z7.261.1127.0
Wire entry guide	0.13–0.2 mm ²	LEL 4/1 WEISS	05.561.8553.0	100
	0.25–0.5 mm ²	LEL 4/2 GRAU	05.561.8653.0	100
	0.75–1.0 mm ²	LEL 4/3 SCHWARZ	05.561.8753.0	100

Knife disconnect terminal blocks with tension spring connection

WKFN 2,5 TKM/35


- Knife disconnect terminal block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

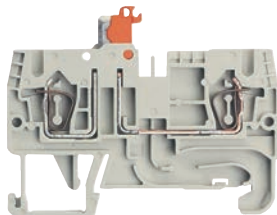

Description	Type	Part No.	Std. Pack	
Disconnect terminal block	gray	WKFN 2,5 TKM/35	56.703.5355.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 60 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.14 – 2.5 mm ²			
Cross section solid/stranded	0.2 – 4 mm ²			
Cross section, AWG		24–12	24–12	
Rated current	20 A	19 A	20 A	
Rated voltage	630 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 D1/2	07.312.6955.0	10
Partition	gray	TWFN 2,5 D1/2	07.312.7055.0	10

WKFN 2,5 TKM 1/2/35


- Duo knife disconnect terminal block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

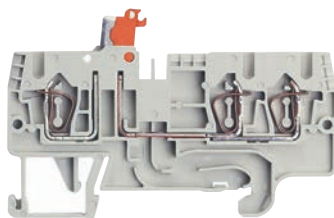

Description	Type	Part No.	Std. Pack	
Disconnect terminal block	gray	WKFN 2,5 TKM 1/2/35	56.703.5455.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 72 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.14 – 2.5 mm ²			
Cross section solid/stranded	0.2 – 4 mm ²			
Cross section, AWG		24–12	24–12	
Rated current	20 A	19 A	20 A	
Rated voltage	630 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 D2/2	07.312.7155.0	10
Partition	gray	TWFN 2,5 D2/2	07.312.7255.0	10

WKFN 2,5 TKM 2/2/35

- Duo knife disconnect terminal block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

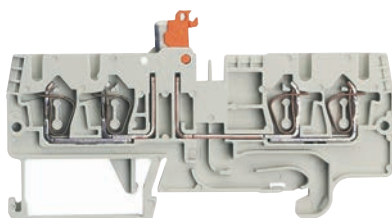


Description	Type	Part No.	Std. Pack	
Disconnect terminal block	gray	WKFN 2,5 TKM 2/2/35	56.703.5555.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 85 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.14 – 2.5 mm ²			
Cross section solid/stranded	0.2 – 4 mm ²			
Cross section, AWG		24–12	24–12	
Rated current	20 A	19 A	20 A	
Rated voltage	630 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 TKM D2/2	07.313.0055.0	10
Partition	gray	TWFN 2,5 TKM D2/2	07.313.0155.0	10

Multi-tier disconnect terminal blocks with tension spring connection

WKFN 2,5 TKM E1/35


- Multi-tier disconnect terminal block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

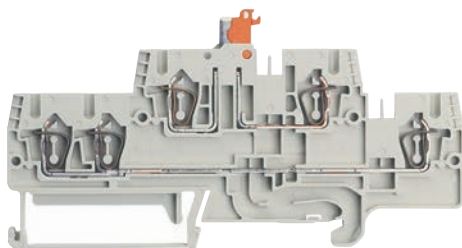

Description	Type	Part No.	Std. Pack	
Disconnect terminal block	gray	WKFN 2,5 TKM E1/35	56.703.6555.0	50
General data				
Width / length / height, incl. TS 7.5	5 mm / 107 mm / 48 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.14 – 2.5 mm ²			
Cross section solid/stranded	0.2 – 4 mm ²			
Cross section, AWG		24–12	24–12	
Rated current	20 A	19 A	20 A	
Rated voltage	500 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 E1/2	07.312.7755.0	10
Partition	gray	TWFN 2,5 E1/2	07.312.7855.0	10


WKFN 2,5 TKM E2/35

- Multi-tier disconnect terminal block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

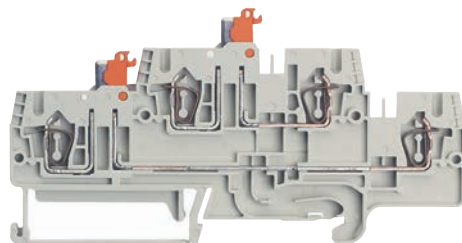

Description	Type	Part No.	Std. Pack	
Disconnect terminal block	gray	WKFN 2,5 TKM E2/35	56.703.6655.0	50
General data				
Width / length / height, incl. TS 7.5	5 mm / 107 mm / 48 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.14 – 2.5 mm ²			
Cross section solid/stranded	0.2 – 4 mm ²			
Cross section, AWG		24–12	24–12	
Rated current	19 A	19 A	19 A	
Rated voltage	500 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 E1/2	07.312.7755.0	10
Partition	gray	TWFN 2,5 E1/2	07.312.7855.0	10

Accessories for *fasis* WKFN 2,5 TKM...

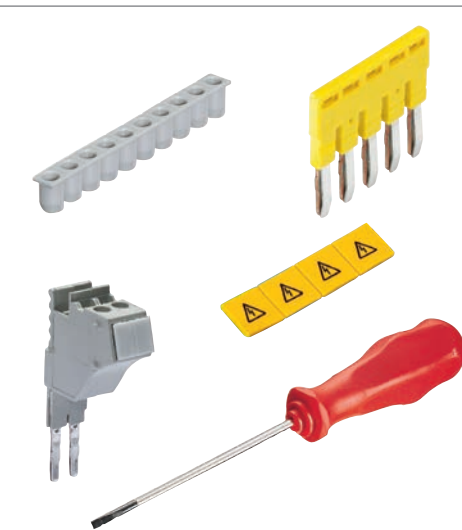


Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated	2-pole	IVB WKF 2,5–2	Z7.280.6227.0	10
	3-pole	IVB WKF 2,5–3	Z7.280.6327.0	10
	4-pole	IVB WKF 2,5–4	Z7.280.6427.0	10
	5-pole	IVB WKF 2,5–5	Z7.280.6527.0	10
	6-pole	IVB WKF 2,5–6	Z7.280.6627.0	10
	7-pole	IVB WKF 2,5–7	Z7.280.6727.0	20
	8-pole	IVB WKF 2,5–8	Z7.280.6827.0	20
	9-pole	IVB WKF 2,5–9	Z7.280.6927.0	20
	10-pole	IVB WKF 2,5–10	Z7.280.7027.0	20
	20-pole	IVB WKF 2,5–20	Z7.280.8027.0	20
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm ²	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm ²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
Cover with warning symbol over 4 blocks	yellow	ADFN 2,5/4 GELB	04.343.8353.8	10
Test adapter, modular		PS WKC/F	Z1.299.9753.0	10
Test plug		ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Fuse blocks with tension spring connection

WKFN 4 TKG with THSi 5 x 20

- Disconnect block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²

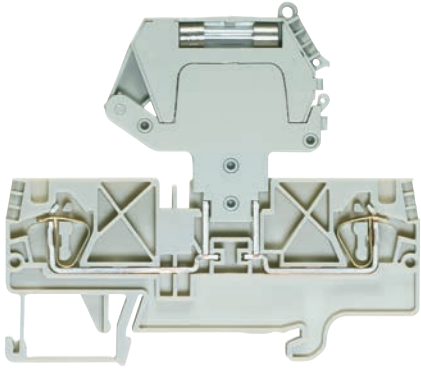


Description	Type	Part No.	Std. Pack	
Disconnect block	gray	WKFN 4 TKG/35	56.704.4055.0	100
Fuse disconnect lever		THSi 5x20	Z1.298.1053.0	10
Fuse disconnect lever with LED 12–24 V ²⁾		THSi 5x20 LED24	Z1.298.1153.0	10
Fuse disconnect lever with LED 24–60 V ²⁾		THSi 5x20 LED60	Z1.298.1253.0	10
Fuse disconnect lever with GL 110–250 V ²⁾		THSi 5x20 GL250	Z1.298.1353.0	10

General data				
Width / length / height, incl. TS 7.5	6 mm / 82 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-3			
Cross section fine-stranded	0.13–4 mm ²			
Cross section solid/stranded	0.13–6 mm ²			
Cross section, AWG		24–10	22–10	
Rated current	¹⁾	¹⁾	10 A ¹⁾	
Rated voltage	500 V ²⁾	600 V ²⁾	300 V ²⁾	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 4 D2/2	07.312.9055.0	10
Partition	gray	TWFN 4 D2/2	07.312.9155.0	10

WKFN 4 TKG with THSi 6,3 x 32

- Disconnect block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²

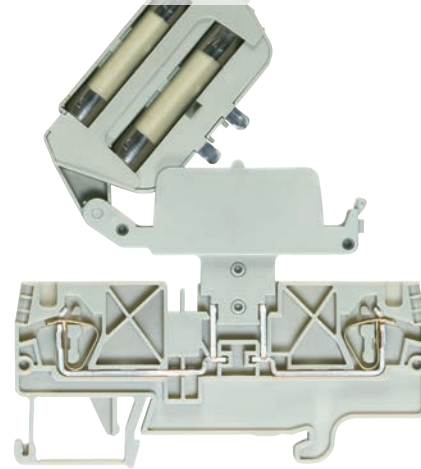

Description	Type	Part No.	Std. Pack	
Disconnect block	gray	WKFN 4 TKG/35	56.704.4055.0	100
Fuse disconnect lever		THSi 6,3x32	Z1.298.1653.0	10
Fuse disconnect lever with LED 12–24 V ²⁾		THSi 6,3x32 LED24	Z1.298.1753.0	10
Fuse disconnect lever with LED 24–60 V ²⁾		THSi 6,3x32 LED60	Z1.298.1853.0	10
Fuse disconnect lever with GL 110–250 V ²⁾		THSi 6,3x32 GL250	Z1.298.1953.0	10
Fuse disconnect lever with GL 500 V ²⁾		THSi 6,3x32 GL500	Z1.298.2053.0	10

General data				
Width / length / height, incl. TS 7.5	6 mm / 82 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60 947-7-3			
Cross section fine-stranded	0.13–4 mm ²			
Cross section solid/stranded	0.13–6 mm ²			
Cross section, AWG		24–10	22–10	
Rated current	¹⁾	¹⁾	10 A ¹⁾	
Rated voltage	500 V ²⁾	600 V ²⁾	300 V ²⁾	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 4 D2/2	07.312.9055.0	10
Intermediate plate, 4 mm	gray	ZP/WKFN 4 TKG	07.313.1655.0	10
Partition	gray	TWFN 4 D2/2	07.312.9155.0	10

Info and accessories for fasis WKFN 4 TKG with THSi...

¹⁾ The current is determined by the inserted fuse.
²⁾ The voltage range is determined by the built-in LED display.
 Depending on the application and the installation method, the circumstances for increased temperature must be checked in the closed fuse holders.
 Higher ambient temperatures are an additional load for the fuse inserts. Therefore, the reduction of the rated current must be considered accordingly in these applications.
 Indicator (24 V): LED, red
 current consumption: 10.3 mA
 Indicator (220 V): LED, red
 current consumption: 0.3 mA

When selecting G fuse inserts, make sure that the specified maximum power is not exceeded.
 Maximum power loss at 23°C ambient temperature (according to DIN EN 60947-7-3)


Type	Rated voltage	Overload protection		Exclusive short-circuit protection	
		Single arrangement	Group arrangement	Single arrangement	Group arrangement
THSi 5x20	250 V	1.6 W	1.6 W	4.0 W	2.5 W
THSi 6,3x32	500 V	2.5 W	1.6 W	4.0 W	2.5 W

Accessories					
Cross connector, insulated	2-pole	IVB WKF 4-2	Z7.261.1227.0	10	
for WKFN 4 TKG with THSi 5x20	3-pole	IVB WKF 4-3	Z7.261.1327.0	10	
	4-pole	IVB WKF 4-4	Z7.261.1427.0	10	
	5-pole	IVB WKF 4-5	Z7.261.1527.0	10	
	6-pole	IVB WKF 4-6	Z7.261.1627.0	10	
	7-pole	IVB WKF 4-7	Z7.261.1727.0	20	
	8-pole	IVB WKF 4-8	Z7.261.1827.0	20	
	9-pole	IVB WKF 4-9	Z7.261.1927.0	20	
	10-pole	IVB WKF 4-10	Z7.261.2027.0	20	
	Wire entry guide	0.13–0.2 mm ²	LEL 4/1 WEISS	05.561.8553.0	100
		0.25–0.5 mm ²	LEL 4/2 GRAU	05.561.8653.0	100
0.75–1.0 mm ²		LEL 4/3 SCHWARZ	05.561.8753.0	100	
Cover with warning symbol over 4 blocks	yellow	ADF 4/4 GELB	04.343.6153.8	10	
Test adapter, modular		ST 2/2,3	Z5.553.2921.0	10	
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	

For WKFN 4 TKG with THSi 6.3x32 and intermediate plate cross connector IVB WKF 2,5-x must be used.

WKFN 4 TKG with SiST

- Disconnect block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²

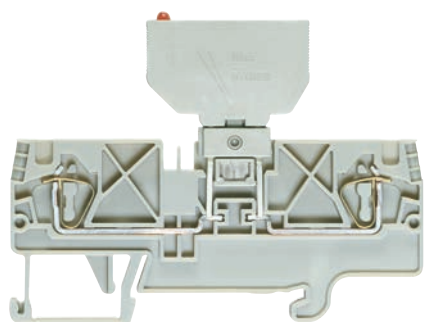

Description	Type	Part No.	Std. Pack	
Disconnect block	gray	WKFN 4 TKG/35	56.704.4055.0	100
Fuse holder for fuse 5 x 20		Si ST	Z1.299.4055.0	10
Fuse holder with indicator (24 V) ²⁾		Si ST LED	Z1.299.4155.0	10
Fuse holder with indicator (220 V) ²⁾		Si ST GL	Z1.299.4255.0	10


General data

Width / length / height, incl. TS 7.5	6 mm / 82 mm / 38 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-3		
Cross section fine-stranded	0.13–4 mm ²		
Cross section solid/stranded	0.13–6 mm ²		
Cross section, AWG			
Rated current	¹⁾	24–10	22–10
Rated voltage	500 V ²⁾	600 V ²⁾	300 V ²⁾
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories	Type	Part No.	Std. Pack	
End plate	gray	APFN 4 D2/2	07.312.9055.0	10
Partition	gray	TWFN 4 D2/2	07.312.9155.0	10

WKFN 4 TKG with DiST

- Disconnect block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²

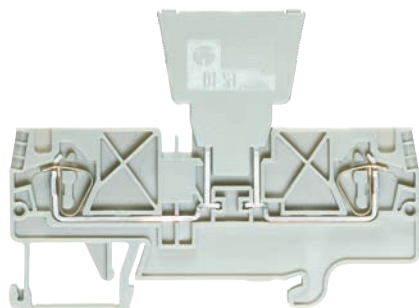

Description	Type	Part No.	Std. Pack	
Disconnect block	gray	WKFN 4 TKG/35	56.704.4055.0	100
Diode plug–empty	$J_{max} = 10 A^{1)}$	DIST ...	Z1.299.3055.0	10
Diode plug–diode	$J_{max} = 1 A^{1)}$	DIST-1 N 4007-1 ³⁾	Z1.299.3155.0	10
Diode plug–diode	$J_{max} = 1 A^{1)}$	DIST-1 N 4007-2 ⁴⁾	Z1.299.3355.0	10
Diode plug with jumper	$J_{max} = 10 A^{1)}$	DIST-D	Z1.299.3255.0	10

General data

Width / length / height, incl. TS 7.5	6 mm / 82 mm / 38 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-3		
Cross section fine-stranded	0.13–4 mm ²		
Cross section solid/stranded	0.13–6 mm ²		
Cross section, AWG			
Rated current	¹⁾	24–10	22–10
Rated voltage	500 V ²⁾	600 V ²⁾	300 V ²⁾
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories	Type	Part No.	Std. Pack	
End plate	gray	APFN 4 D2/2	07.312.9055.0	10
Partition	gray	TWFN 4 D2/2	07.312.9155.0	10

Info and Accessories for *fasis* WKFN 4 TKG with SiST and DiST

¹⁾ The current is determined by the inserted fuse.

²⁾ The voltage range is determined by the built-in LED display. Depending on the application and the installation method, the circumstances for increased temperature must be checked in the closed fuse holders.

Higher ambient temperatures are an additional load for the fuse inserts. Therefore, the reduction of the rated current must be considered accordingly in these applications.

Indicator (24 V): LED, red
current consumption: 10.3 mA

Indicator (220 V): LED, red
current consumption: 0.3 mA

^{3)/4)} Periodic peak voltage 1000 V
Direction of the diode: Anode Cathode³⁾
Cathode Anode⁴⁾

Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated	2-pole	IVB WKF 4-2	Z7.261.1227.0	10
	3-pole	IVB WKF 4-3	Z7.261.1327.0	10
	4-pole	IVB WKF 4-4	Z7.261.1427.0	10
	5-pole	IVB WKF 4-5	Z7.261.1527.0	10
	6-pole	IVB WKF 4-6	Z7.261.1627.0	10
	7-pole	IVB WKF 4-7	Z7.261.1727.0	20
	8-pole	IVB WKF 4-8	Z7.261.1827.0	20
	9-pole	IVB WKF 4-9	Z7.261.1927.0	20
	10-pole	IVB WKF 4-10	Z7.261.2027.0	20
	Wire entry guide	0.13–0.2 mm ²	LEL 4/1 WEISS	05.561.8553.0
0.25–0.5 mm ²		LEL 4/2 GRAU	05.561.8653.0	100
0.75–1.0 mm ²		LEL 4/3 SCHWARZ	05.561.8753.0	100
Cover with warning symbol over 4 blocks	yellow	ADF 4/4 GELB	04.343.6153.8	10
Test adapter, modular		ST 2/2,3	Z5.553.2921.0	10
Screwdriver, unisulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, unisulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10


Type	Rated voltage	Overload protection		Exclusive short-circuit protection	
		Single arrangement	Group arrangement	Single arrangement	Group arrangement
SiST	250 V	1.6 W	1.6 W	2.5 W	1.6 W

When selecting G fuse inserts, make sure that the specified maximum power is not exceeded. Maximum power loss at 23°C ambient temperature (according to DIN EN 60947-7-3)

Fuse blocks with tension spring connection

WKFN 4 FSI


- Fuse block for automobile fuses for mounting on TS 35
- Nominal cross section 4 mm²

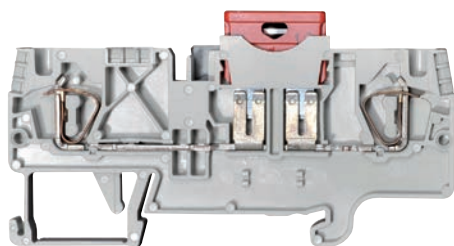

Description	Type	Part No.	Std. Pack	
Fuse block	gray	WKFN 4 FSI	56.704.4155.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 82 mm / 39 mm			
Wire strip length	12 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-3			
Cross section fine-stranded	0.13 – 4 mm ²			
Cross section solid/stranded	0.13 – 6 mm ²			
Cross section, AWG				
Rated current	*			
Rated voltage	800 V			
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	* Observe the derating curve, available in our e-catalog at https://eshop.wieland-electric.com			
Accessories				
End plate	gray	APFN 4 D2/2	07.312.9055.0	10
Partition, 4mm for TCP	gray	ZP/WKFN 4 TKG	07.313.1655.0	10
Partition	gray	TWFN 4 D2/2	07.312.9155.0	10

WKFN 4 FSI

- Fuse block with indicator for mounting on TS 35
- Nominal cross section 4 mm²

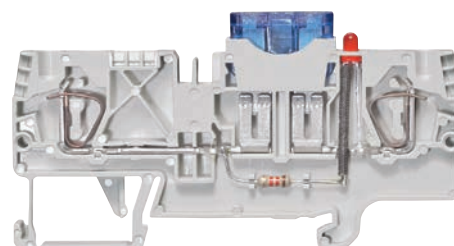


Description	Type	Part No.	Std. Pack	
Fuse block	gray	WKFN 4 FSI LED12	56.704.4255.0	100
Fuse block	gray	WKFN 4 FSI LED24	56.704.5355.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 82 mm / 39 mm			
Wire strip length	12 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-3			
Cross section fine-stranded	0.13 – 4 mm ²			
Cross section solid/stranded	0.13 – 6 mm ²			
Cross section, AWG				
Rated current	*			
Rated voltage	800 V			
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	* Observe the derating curve, available in our e-catalog at https://eshop.wieland-electric.com			
Accessories				
End plate	gray	APFN 4 D2/2	07.312.9055.0	10
Partition, 4mm for TCP	gray	ZP/WKFN 4 TKG	07.313.1655.0	10
Partition	gray	TWFN 4 D2/2	07.312.9155.0	10

Automotive fuses

The WKFN 4 FSI .. type fuse blocks take blade-type fuses according to ISO 8820 (DIN 72581-3).

Automotive fuses are not offered for sale by Wieland Electric!


We recommend the following:

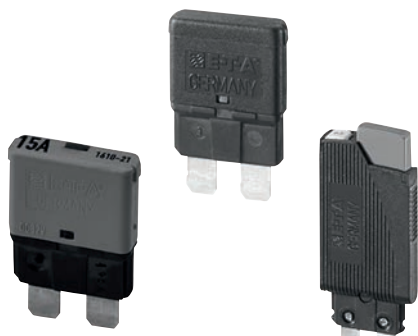




Description	Color	
Blade-type automobile fuse, DC 32 V	black	1 A
Electrotechnical specialized trade	gray	2 A
Motor vehicle accessory market	violet	3 A
	pink	4 A
	beige	5 A
	brown	7.5 A
	red	10 A
	blue	15 A
	yellow	20 A
Thermal circuit breaker, DC 32 V		5 A
ETA*, type 1610-21 or		6 A
ETA*, type 1610-H2 with manual release		10 A
		15 A
		20 A
Thermal circuit breaker, AC 250 V; DC 65 V		0.1 A
ETA*, type 1180 ..		0.2 A
		0.5 A
		1 A
		2 A
		3 A
		4 A
		6 A
		8 A
		10 A

Supply terminal



WKF 16/35 PV/WKFN

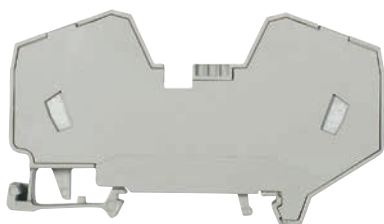- Supply terminal for mounting on TS 35
- Nominal cross section 16 mm²
- Ex e I/II  II 2GD IM2
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack	
Supply terminal	gray	WKF 16/35 PV/WKFN	56.716.0353.0	20
General data				
Width / length / height, incl. TS 7.5	12 mm / 82 mm / 48 mm			
Wire strip length	15 mm			
Approvals	 KEMA 01 ATEX 2087 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-3			EN 60 079-0/-7
Cross section fine-stranded	4–16 mm ²			4–16 mm ²
Cross section solid/stranded	4–16 mm ²			4–16 mm ²
Cross section, AWG		24–4	12–4	
Rated current	76 A	75 A	78 A	64 A ¹⁾
Rated voltage	800 V	600 V	600 V	690 V
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	¹⁾ Derating curves available on request			

Accessories	Type	Part No.	Std. Pack
Cover with warning symbol over 4 blocks	ADF 16/4 GELB	04.343.6653.8	10
Screwdriver, uninsulated	DIN 5264 B 1,0x5,5	06.502.4200.0	5

Potential distribution				
	one side	both sides	single	double
Jumpering	one side	both sides	single	double
IVB WKF 4...	single	double	single	double
I_{max}	64	76	76	76
I_{Nblock}	32	32	32	32

$$I_{max} = \sum I_n \leq \sum I_{N block}$$

Accessories for *fasis* WKFN 4 FSI...



Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated, for	2 blocks	IVB WKF 4–2	Z7.261.1227.0	10
	3 blocks	IVB WKF 4–3	Z7.261.1327.0	10
	4 blocks	IVB WKF 4–4	Z7.261.1427.0	10
	5 blocks	IVB WKF 4–5	Z7.261.1527.0	10
	6 blocks	IVB WKF 4–6	Z7.261.1627.0	10
	7 blocks	IVB WKF 4–7	Z7.261.1727.0	20
	8 blocks	IVB WKF 4–8	Z7.261.1827.0	20
	9 blocks	IVB WKF 4–9	Z7.261.1927.0	20
	10 blocks	IVB WKF 4–10	Z7.261.1027.0	20
	Wire entry guide	0.13–0.2 mm ²	LEL 4/1 WEISS	05.561.8553.0
0.25–0.5 mm ²		LEL 4/2 GRAU	05.561.8653.0	100
0.75–1.0 mm ²		LEL 4/1 SCHWARZ	05.561.8753.0	100
Cover with warning symbol over 4 blocks	yellow	ADF 4/4 GELB	04.343.6153.8	10
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

fasis CON

DIN rail terminal blocks with plug-in connection

The system

- Rated current up to 32 A
- Connection cross-section 4 mm²
- Width 5 mm


The terminals

Modular DIN rail mount terminals for universal use with pluggable connectors, all with tension spring connection technology.

In addition to the pluggable connection, a tension spring connection also is available to use the block as a standard feed-through terminal.

The connectors

For application specific wire harness assemblies, or single pole test plug.

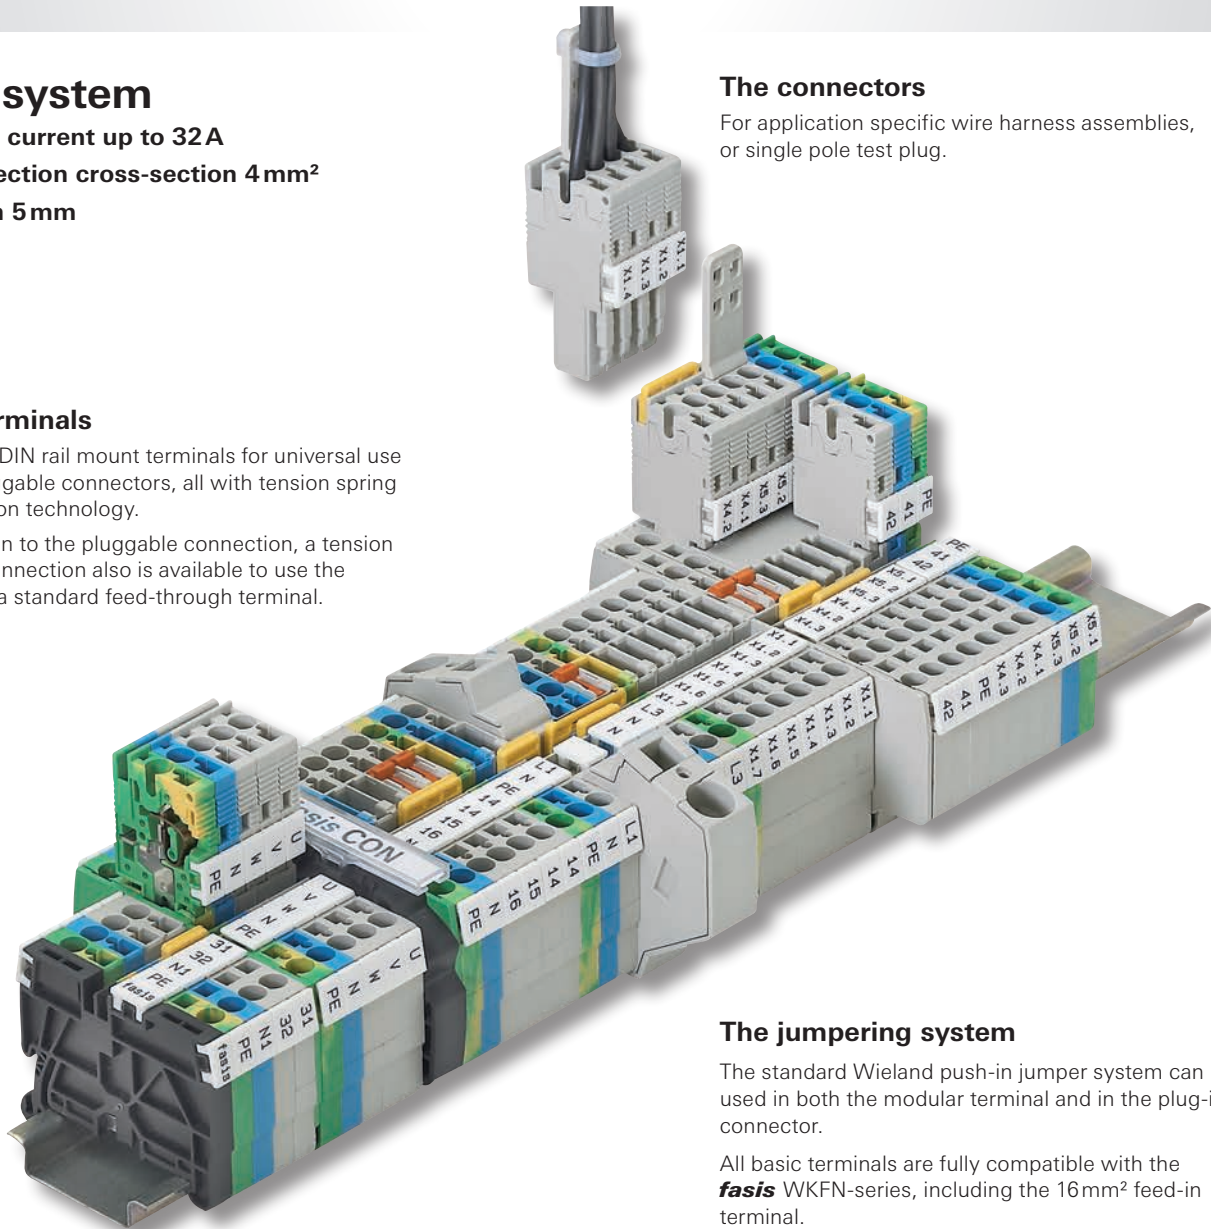

The jumpering system

The standard Wieland push-in jumper system can be used in both the modular terminal and in the plug-in connector.

All basic terminals are fully compatible with the **fasis** WKFN-series, including the 16 mm² feed-in terminal.

The modular terminal block's integrated jumper channel maintains a permanent feed-through connection even when the plug is not installed.


The labeling system

All termination points can be clearly labeled using the standard Wieland labeling system.


Integrated safety

Touch protection of all components, even when not connected, IP 20 when connected.

All plug connectors have a built-in latching mechanism and coding option – no further accessories required.

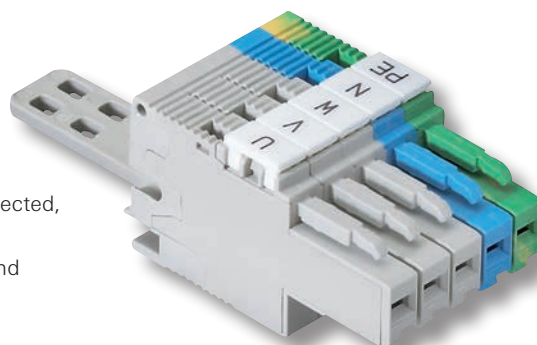

Plug & Play in the control cabinet

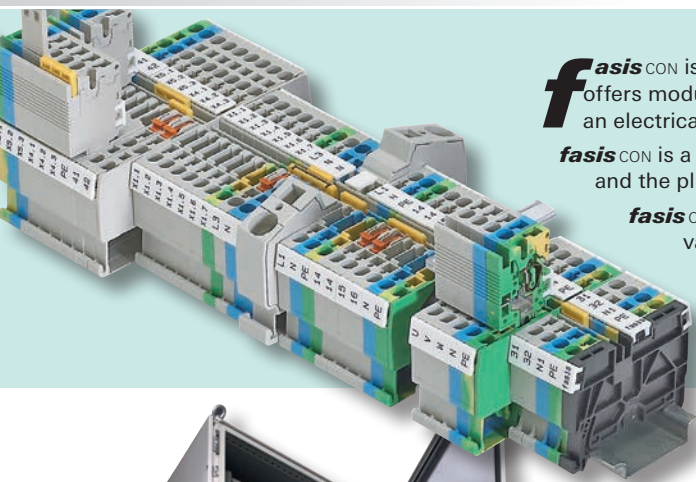


fasis CON is a DIN rail terminal block system with a pluggable outgoing feeder, which offers modular, cost-saving solutions with advantages in every phase of the service life of an electrical system.

fasis CON is a fully compatible part of the established **fasis** WKFN system. Both the terminal and the plug connector possess the high-performance features of **fasis** WKFN.

fasis CON consists of feed-through and ground DIN rail terminal blocks with a wide variety of both wiring termination points and sockets for the **fasis** CON pluggable connectors.

fasis CON is a cost-effective, high-performance and pluggable system solution.


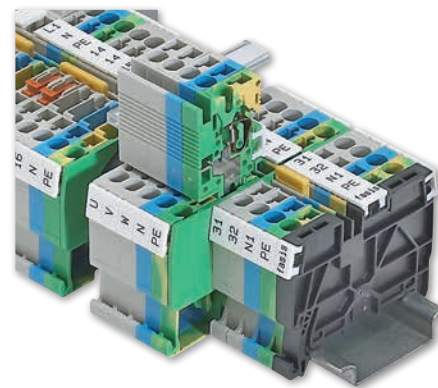


Cost-effective

- Cost-optimized installation and maintenance times
- Small numbers of components
- Can be assembled individually
- Pre-assembled modules

High-performance

- Range of terminals up to 4 mm²
- Rated current up to 32A*
- Rated voltage 500V
- Total width only 5 mm

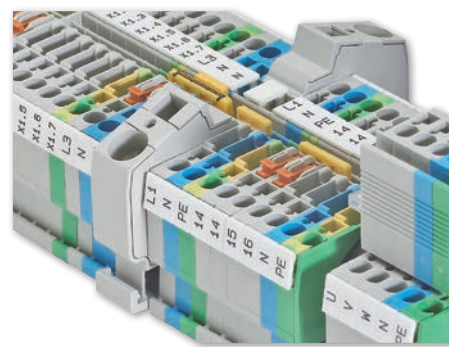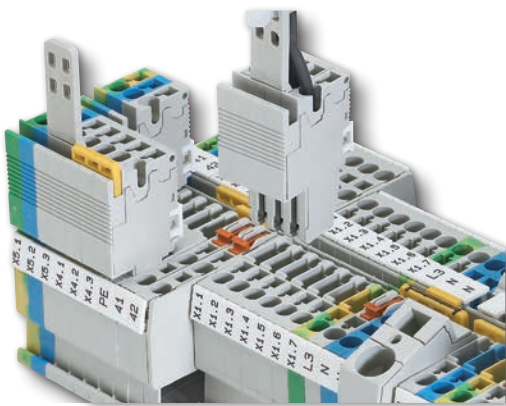

Pluggable

- Complex systems can be brought on-line quickly and cost-effectively with pluggable technology
- Functional units can be tested easily
- Field components can be more quickly replaced when faults occur
- Systems can be expanded with pluggable technology

Complete system


- Uniform accessories
- Coded to prevent mismating
- All components can be jumpered
- Comprehensive and clear labeling
- Can be combined with **fasis** WKFN

* Observe the derating curve, available in our online-catalog at <https://eshop.wieland-electric.com>

DIN rail terminal blocks with plug-in connection

WKFN 2,5 F/P/F


- DIN rail terminal blocks with plug-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

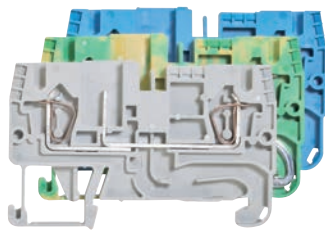

Description	Type	Part No.	Std. Pack	
Feed-through block F/P/F	gray	WKFN 2,5 F/P/F	56.703.2355.0	100
Feed-through block F/P/F	blue	WKFN 2,5 F/P/F	56.703.2355.6	100
Ground block	green/yellow	WKFN 2,5 F/P/F-SL	56.703.2455.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 60 mm / 39 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1/-2			
Cross section fine-stranded	0.13 – 4 mm ²			
Cross section solid/stranded	0.13 – 4 mm ²			
Cross section, AWG		24 – 12	24 – 12	
Rated current	32 A*	20 A	20 A	
Rated voltage	500 V	500 V	500 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	* Observe the derating curve, available in our e-catalog at https://eshop.wieland-electric.com			
Accessories				
End plate	gray	APFN 2,5 D1/2	07.312.6955.0	10
End plate	blue	APFN 2,5 D1/2 BLAU	07.312.6955.6	10
Partition	gray	TWFN 2,5 D1/2	07.312.7055.0	10

WKFN 2,5 2P/2F


- DIN rail terminal blocks with plug-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

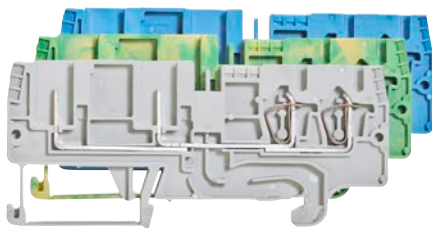

Description	Type	Part No.	Std. Pack	
Feed-through block 2P/2F	gray	WKFN 2,5 2P/2F	56.703.2155.0	100
Feed-through block 2P/2F	blue	WKFN 2,5 2P/2F	56.703.2155.6	100
Ground block	green/yellow	WKFN 2,5 2P/2F-SL	56.703.2255.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 85 mm / 39 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1/-2			
Cross section fine-stranded	0.13 – 4 mm ²			
Cross section solid/stranded	0.13 – 4 mm ²			
Cross section, AWG		24 – 12	24 – 12	
Rated current	32 A*	20 A	20 A	
Rated voltage	500 V	500 V	500 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	* Observe the derating curve, available in our e-catalog at https://eshop.wieland-electric.com			
Accessories				
End plate	gray	APFN 2,5 TKM D2/2	07.313.0055.0	10
Partition	gray	TWFN 2,5 TKM D2/2	07.313.0155.0	10

WKFN 2,5 E/.../...

- Multi-tier blocks with plug-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

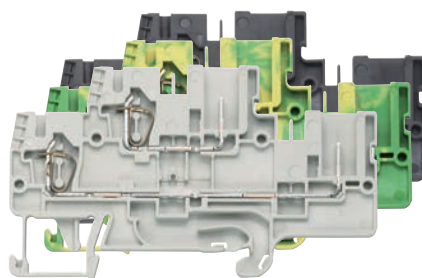


Description	Type	Part No.	Std. Pack	
Multi-tier block E/F/P	gray	WKFN 2,5 E/F/P	56.703.3455.0	100
Multi-tier block, vertically connected	black	WKFN 2,5 E/VB/F/P	56.703.3555.1	100
Multi-tier ground block	green/yellow	WKFN 2,5 E/F/P/SL	56.703.3655.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 49 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1/-2			
Cross section fine-stranded	0.13 – 4 mm ²			
Cross section solid/stranded	0.13 – 4 mm ²			
Cross section, AWG		24 – 12	24 – 12	
Rated current	22 A*	20 A	20 A	
Rated voltage	500 V	500 V	500 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Note	* Observe the derating curve, available in our e-catalog at https://eshop.wieland-electric.com			
Accessories				
End plate	gray	APFN 2,5 E	07.312.7355.0	10
Partition	gray	TWFN 2,5 E	07.312.7455.0	10

Connectors


WBF 2,5/..../.

- Connectors for DIN rail terminal blocks with plug-in connection

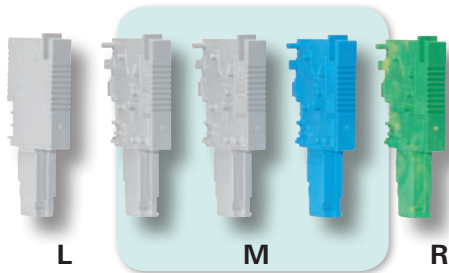

Description	Type	Part No.	Std. Pack
Connectors LEFT			
gray	WBF 2,5 1/L/GR	Z1.110.8955.0	50
blue	WBF 2,5 1/L/BL	Z1.110.8955.6	50
green/yellow	WBF 2,5 1/L/SL	Z1.110.8955.7	50
Connectors MIDDLE			
gray	WBF 2,5 1/M/GR	Z1.110.8855.0	50
blue	WBF 2,5 1/M/BL	Z1.110.8855.6	50
green/yellow	WBF 2,5 1/M/SL	Z1.110.8855.7	50
Connectors RIGHT			
gray	WBF 2,5 1/R/GR	Z1.110.9055.0	50
blue	WBF 2,5 1/R/BL	Z1.110.9055.6	50
green/yellow	WBF 2,5 1/R/SL	Z1.110.9055.7	50
Connectors preassembled, gray			
1-pole	WBF 2,5-1	59.903.0155.0	50
2-pole	WBF 2,5-2	59.903.0255.0	50
3-pole	WBF 2,5-3	59.903.0355.0	50
4-pole	WBF 2,5-4	59.903.0455.0	50
5-pole	WBF 2,5-5	59.903.0555.0	50
6-pole	WBF 2,5-6	59.903.0655.0	25
7-pole	WBF 2,5-7	59.903.0755.0	25
8-pole	WBF 2,5-8	59.903.0855.0	25
9-pole	WBF 2,5-9	59.903.0955.0	25
10-pole	WBF 2,5-10	59.903.1055.0	25
General data			
Width / length / height, incl. TS 7.5	5 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1/-2		
Cross section fine-stranded	0.13 – 4 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG		24 – 12	24 – 12
Rated current	32 A*	20 A	20 A
Rated voltage	500 V	500 V	500 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Note	* Observe the derating curve, available in our e-catalog at https://eshop.wieland-electric.com		
Accessories			
Strain relief	Z-WBF	05.567.9155.0	10
Screwdriver, uninsulated	DIN 5264 B 0,6x3,5	06.502.4000.0	10
Screwdriver, MINI	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10

Accessories for *fasis* WKFN 2,5...

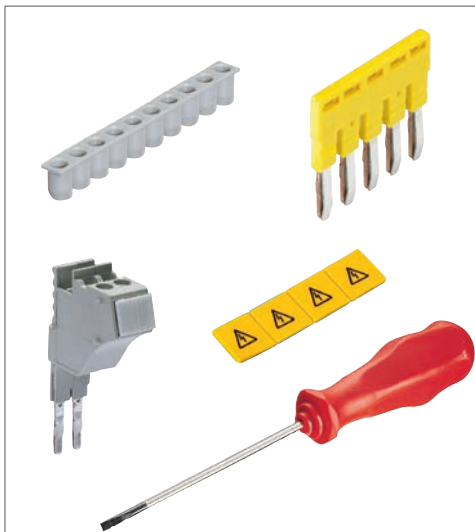


Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated, for	2 blocks	IVB WKF 2,5-2	Z7.280.6227.0	10
	3 blocks	IVB WKF 2,5-3	Z7.280.6327.0	10
	4 blocks	IVB WKF 2,5-4	Z7.280.6427.0	10
	5 blocks	IVB WKF 2,5-5	Z7.280.6527.0	10
	6 blocks	IVB WKF 2,5-6	Z7.280.6627.0	10
	7 blocks	IVB WKF 2,5-7	Z7.280.6727.0	20
	8 blocks	IVB WKF 2,5-8	Z7.280.6827.0	20
	9 blocks	IVB WKF 2,5-9	Z7.280.6927.0	20
	10 blocks	IVB WKF 2,5-10	Z7.280.7027.0	20
	20 blocks	IVB WKF 2,5-20	Z7.280.8027.0	20
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm ²	LELN 2,5/1 GRAU	05.564.3855.0	100
	0.75–1.0 mm ²	LELN 2,5/1 SCHWARZ	05.564.3955.0	100
Cover with warning symbol over 4 blocks	yellow	ADFN 2,5/4 GELB	04.343.8353.8	10
Test adapter, modular	PS WKC/F	Z1.299.9753.0	10	
Screwdriver, uninsulated	DIN 5264 B 0,6x3,5	06.502.4000.0	5	
Screwdriver, uninsulated, MINI	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	

DIN rail terminal blocks with tension spring and pluggable connections

WKF 2,5 D2/8113/35


- Duo feed-through block for mounting on TS 35
- Nominal cross section 2.5 mm²

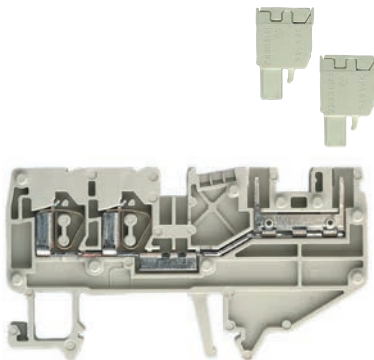

Description	Type	Part No.	Std. Pack	
Duo feed-through block	gray	WKF 2,5 D2/8113/35	56.703.2053.0	100
Duo feed-through block	blue	WKF 2,5 D2/8113/35 BLAU	56.703.2053.6	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 76 mm / 42 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.13 – 2.5 mm ²			
Cross section solid/stranded	0.13 – 4 mm ²			
Cross section, AWG		22 – 12	24 – 12	
Rated current	16 A	15 A	15 A	
Rated voltage	250 V	300 V	300 V	
Rated impulse voltage	4 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 2,5/D2/8113	07.312.4153.0	10
End plate	blue	APF 2,5/D2/8113	07.312.4153.6	10
Wire entry guide	0.13–0.2 mm ²	LEL 2,5/1 WEISS	05.561.6653.0	100
	0.25–0.5 mm ²	LEL 2,5/2 GRAU	05.561.6653.0	100
	0.75–1.0 mm ²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
Cover with warning symbol over 4 blocks		ADF 2,5/4 GELB	04.343.6053.8	10

WKF 2,5 D2/8113/SL/35


- Duo-ground block for mounting on TS 35
- Nominal cross section 2.5 mm²

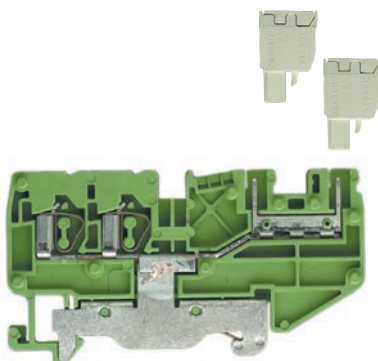

Description	Type	Part No.	Std. Pack	
Duo-ground block	green/yellow	WKF 2,5 D2/8113 SL/35	56.703.9253.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 76 mm / 42 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.13 – 2.5 mm ²			
Cross section solid/stranded	0.13 – 4 mm ²			
Cross section, AWG		22 – 12	24 – 12	
Rated current	16 A			
Rated voltage	250 V	300 V	300 V	
Rated impulse voltage	4 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 2,5/D2/8113	07.312.4153.0	10
Wire entry guide	0.13–0.2 mm ²	LEL 2,5/1 WEISS	05.561.6653.0	100
	0.25–0.5 mm ²	LEL 2,5/2 GRAU	05.561.6653.0	100
	0.75–1.0 mm ²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
Cover with warning symbol over 4 blocks		ADF 2,5/4 GELB	04.343.6053.8	10

WKF 1,5 E/8113/35


- Multi-tier block for mounting on TS 35
- Nominal cross section 1.5 mm²

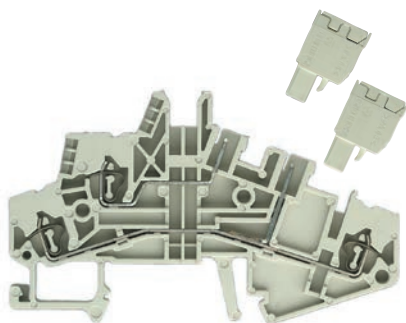

Description	Type	Part No.	Std. Pack	
Multi-tier block	gray	WKF 1,5 E/8113/35	56.702.2053.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 83 mm / 51 mm			
Wire strip length	8 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.13 – 1.5 mm ²			
Cross section solid/stranded	0.13 – 2.5 mm ²			
Cross section, AWG		22 – 12	24 – 12	
Rated current	16 A			
Rated voltage	250 V			
Rated impulse voltage	4 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5/E/8113	07.312.4753.0	10
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.562.2453.0	100
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.562.2553.0	100
	0.75–1.0 mm ²	LEL 1,5/3 SCHWARZ	05.562.2653.0	100
Cover with warning symbol over 4 blocks		ADF 1,5/4 GELB	04.343.8353.8	10

WKF 1,5 E/35

- Multi-tier block for mounting on TS 35
- Nominal cross section 1.5 mm²

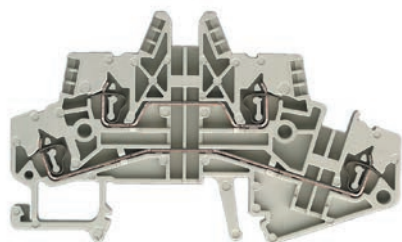


Description	Type	Part No.	Std. Pack	
Multi-tier block	gray	WKF 1,5 E/35	56.702.7053.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 83 mm / 51 mm			
Wire strip length	8 mm			
Approvals				
Technical data	IEC	UL	CSA	
	EN 60947-7-1			
Cross section fine-stranded	0.13 – 1.5 mm ²			
Cross section solid/stranded	0.13 – 2.5 mm ²			
Cross section, AWG		30 – 14	30 – 14	
Rated current	17,5 A	15 A	15 A	
Rated voltage	400 V	300 V	600 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APF 1,5 E	07.312.3553.0	10
Partition	gray	TWF 1,5 E	07.312.3653.0	10
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.562.2453.0	100
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.562.2553.0	100
	0.75–1.0 mm ²	LEL 1,5/3 SCHWARZ	05.562.2653.0	100
Cover with warning symbol over 4 blocks		ADF 1,5/4 GELB	04.343.8353.8	10

wiecon PC board connector

Type 8113 BFK

- Spring clamp/tension spring system
- 5 mm spacing, nominal cross section 2,5 mm²
- Accessories: coding pice 05.561.9153.0
- Rated voltages: VDE 0110/01.89
 - 250 V/4 kV/3 – Overvoltage category III
 - 400 V/4 kV/2 – Overvoltage category II
 - 1000 V/4 kV/1 – Overvoltage category I

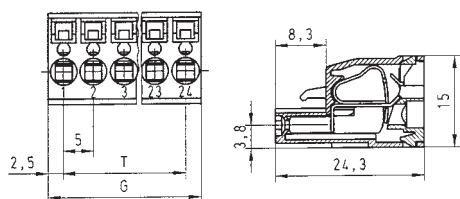


G	T	Pole	Part No.	Part No.	Std. Pack
5 mm spacing			unmarked	marked	
10.00	5.00	2	25.920.3253.0	25.920.0253.0	100
15.00	10.00	3	25.920.3353.0	25.920.0353.0	100
20.00	15.00	4	25.920.3453.0	25.920.0453.0	50
25.00	20.00	5	25.920.3553.0	25.920.0553.0	50
30.00	25.00	6	25.920.3653.0	25.920.0653.0	50
35.00	30.00	7	25.920.3753.0	25.920.0753.0	50
40.00	35.00	8	25.920.3853.0	25.920.0853.0	50
45.00	40.00	9	25.920.3953.0	25.920.0953.0	50
50.00	45.00	10	25.920.4053.0	25.920.1053.0	50
55.00	50.00	11	25.920.4153.0	25.920.1153.0	50
60.00	55.00	12	25.920.4253.0	25.920.1253.0	50
65.00	60.00	13	25.920.4353.0	25.920.1353.0	50
70.00	65.00	14	25.920.4453.0	25.920.1453.0	50
75.00	70.00	15	25.920.4553.0	25.920.1553.0	50
80.00	75.00	16	25.920.4653.0	25.920.1653.0	50
17- to 24-pole configurations upon request					
General data					
Wire strip length	9 mm				
Approvals					
Technical data	IEC	UL	CSA		
	EN 60947-7-1				
Cross section fine-stranded	0.13 – 2.5 mm ²				
Cross section solid/stranded	0.13 – 4 mm ²				
Cross section, AWG		22 – 12	22 – 12		
Rated current	12 A	12 A	12 A		
Rated voltage		300 V	300 V		
Rated impulse voltage					
Pollution degree					

Accessories for *fasis* WKF 2,5 D... and WKF 1,5 E...



Accessories	Type	Part No.	Std. Pack	
Cross connector, insulated	2-pole	IVB WKF 2,5–2	Z7.280.6227.0	10
	3-pole	IVB WKF 2,5–3	Z7.280.6327.0	10
	4-pole	IVB WKF 2,5–4	Z7.280.6427.0	10
	5-pole	IVB WKF 2,5–5	Z7.280.6527.0	10
	6-pole	IVB WKF 2,5–6	Z7.280.6627.0	10
	7-pole	IVB WKF 2,5–7	Z7.280.6727.0	20
	8-pole	IVB WKF 2,5–8	Z7.280.6827.0	20
	9-pole	IVB WKF 2,5–9	Z7.280.6927.0	20
	10-pole	IVB WKF 2,5–10	Z7.280.7027.0	20
	20-pole	IVB WKF 2,5–20	Z7.280.8027.0	20
	Cover with warning symbol over 4-poles	yellow	AD 8113/4 GELB	04.343.6853.8
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5
Coding strip			05.561.0053.0	100



Initiator and actuator blocks with tension spring connection

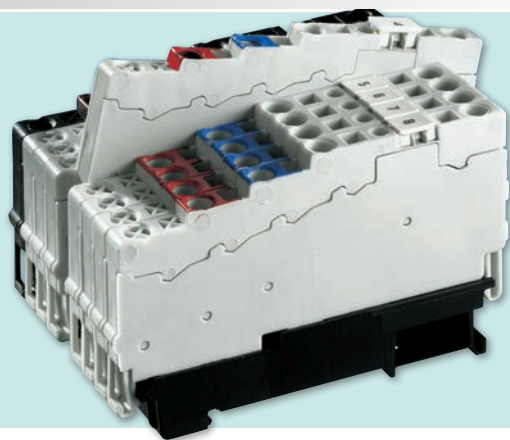

For machine and system control wiring, practice-oriented solutions are preferred that are primarily economical and reliable and thus contribute to the system's operational and functional safety.

fasis KOI was designed to connect the great variety of initiators and actuators to central and remote control systems. The initiator and actuator blocks of type WKF 1,5 KOI have, in particular, been conceived for the requirements in machine and system engineering. They facilitate the wiring task through clearly arranged termination points and an easily accessible and operable tension spring technology.

fasis KOI is a compact and efficient wiring system for connection purposes, potential distribution and transmission of signals from initiators and actuators.

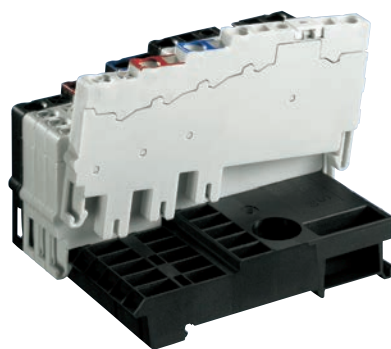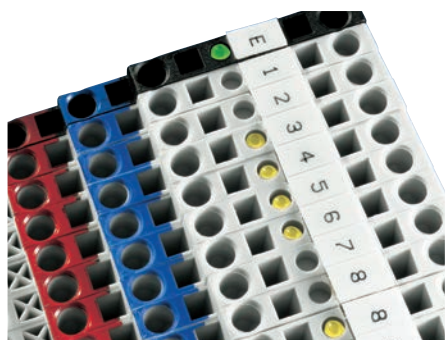


System features and benefits

- Control-compatible system solutions through accurate matching of the connection modules' number of poles to the input and output modules of the PLC.
- Flexible connection module mounting options with either snap-on TS 35 DIN rail mount, or direct mounting to a backplane with screws.
- Application-specific individual terminal block as a link between initiators, actuators and the PLC.

Economically designed

- Low space requirements due to compact dimensioning of the individual terminal blocks and integration of the potential distribution inside the connection module.
- Efficient installation and start-up of the wiring system by simply fitting the connection module with components, making further accessories unnecessary.
- Reduction of the warehousing costs due to a low variety of parts without having to forego flexibility in the application.

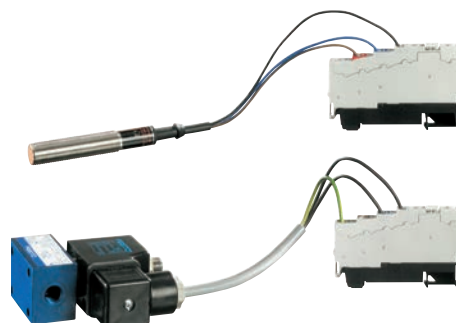


Service-friendly operation

- Short maintenance times for modifications of the terminal block assembly by replacing or extending individual blocks without interrupting the power supply of the other initiator and actuator blocks.
- Immediate visual monitoring of the switching states due to integrated light-emitting diodes.
- No maintenance required due to a permanently secure and dynamic tension spring clamp connection system.

Application specific options

- Power supply to the connection modules through supply blocks, with optional LEDs.
- Potential distribution through connection modules in designs for 9 (1+8) or 18 (2x(1+8)) terminal blocks.
- Initiator blocks, for example for the connection of 3-wire or 4-wire proximity or position switches, with optional LEDs.
- Actuator terminals, for example for the connection of magnetic valves.

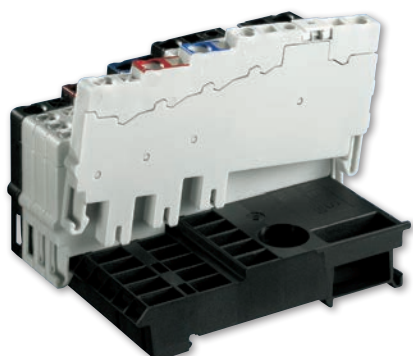

Connection module: Collect and distribute potentials

- Potential distribution is achieved quickly and safely as soon as the terminal blocks are snapped on.
- Cross connectors for the plus, minus and ground or screen potential are each integrated in the connection modules.
- The system does not require any additional cross connectors.




Marking system: All clamping points marked clearly

- Marking tags easily readable even with the wires connected.
- Clear assignment of wire to the termination point while wiring.
- Simplified troubleshooting for servicing.
- Customized marking with the **wieplot** marking system.



Wire entry guides: Connect small cross sections safely

- Wire entry guides prevent the wires from being inserted too deeply (smaller than 1 mm²) and enable an easy, professional and quick installation.
- Ensure the connection of solid and fine-stranded wires smaller than 1 mm².
- Also see the accessories for DIN rail terminal blocks starting at page 140

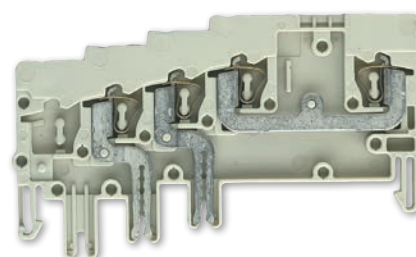


Materials: High-quality materials

- Special alloys enable low feed-through resistance and provide a gas-tight contact area:
 - clamping spring: stainless CrNi steel
 - current-carrying bar: tin-plated copper
- Polyamide has excellent electrical, chemical and mechanical characteristics:
 - temperature resistance: up to 120°C
 - creepage resistance: CTI 600
 - flammability class: self-extinguishing, UL94-V2


Initiator and actuator blocks with tension spring connection

WKF 1,5 KOI 3L...

- Initiator block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²

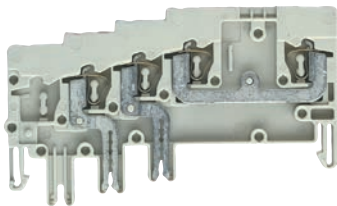

37.702.7453.0
* 65 V/1.5 kV/3



37.702.8453.0
* DC 24 V
same as picture,
but with LED



Description	Type	Part No.	Std. Pack	
Initiator block	gray	WKF 1,5 KOI 3L	37.702.7453.0	50
Initiator block with LED	gray	WKF 1,5 KOI 3L-PGE	37.702.8453.0	50

General data			
Width / length / height, incl. TS 7.5	5 mm / 71 mm / 48 mm		
Wire strip length	10 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 1.5 mm ²		
Cross section solid/stranded	0.13 – 1.5 mm ²		
Cross section, AWG		22 – 16	28 – 16
Rated current	10 A	10 A	10 A
Rated voltage	*	65 V	65 V
Rated impulse voltage			
Pollution degree			


Accessories				
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.562.2453.0	100
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.562.2553.0	100
	0.75–1.0 mm ²	LEL 1,5/3 SCHWARZ	05.562.2653.0	100
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5

WKF 1,5 KOI 3L/SL...


- Initiator block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²



37.702.7553.0
* 65 V/1.5 kV/3



37.702.8553.0
* DC 24 V
same as picture,
but with LED




Description	Type	Part No.	Std. Pack	
Initiator block	gray	WKF 1,5 KOI 3L/SL	37.702.7553.0	50
Initiator block with LED	gray	WKF 1,5 KOI 3L/SL-PGE	37.702.8553.0	50

General data			
Width / length / height, incl. TS 7.5	5 mm / 71 mm / 48 mm		
Wire strip length	10 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 1.5 mm ²		
Cross section solid/stranded	0.13 – 1.5 mm ²		
Cross section, AWG		22 – 16	28 – 16
Rated current	10 A	10 A	10 A
Rated voltage	*	65 V	65 V
Rated impulse voltage			
Pollution degree			


Accessories				
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.562.2453.0	100
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.562.2553.0	100
	0.75–1.0 mm ²	LEL 1,5/3 SCHWARZ	05.562.2653.0	100
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5

WKF 1,5 KOE...


- Supply block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²

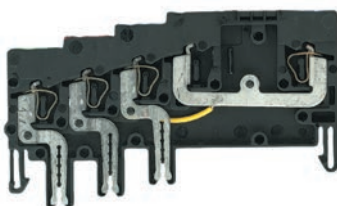

37.702.7753.0
* 65 V/1.5 kV/3



37.702.8753.0
* DC 24 V
same as picture,
but with LED




Description	Type	Part No.	Std. Pack	
Supply block	black	WKF 1,5 KOE	37.702.7753.0	50
Supply block with LED	black	WKF 1,5 KOE-PGN	37.702.8753.0	50

General data			
Width / length / height, incl. TS 7.5	5 mm / 71 mm / 48 mm		
Wire strip length	10 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 1.5 mm ²		
Cross section solid/stranded	0.13 – 1.5 mm ²		
Cross section, AWG		22 – 16	28 – 16
Rated current	10 A	10 A	10 A
Rated voltage	*	65 V	65 V
Rated impulse voltage			
Pollution degree			

Accessories				
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.562.2453.0	100
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.562.2553.0	100
	0.75–1.0 mm ²	LEL 1,5/3 SCHWARZ	05.562.2653.0	100
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5

WKF 1,5 KOA 2L...

- Actuator block with tension spring connection for mounting on TS 35
- Nominal cross section 1.5 mm²

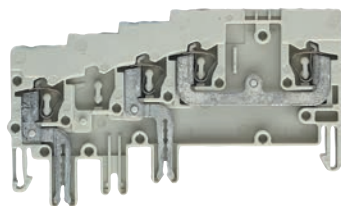

37.702.7653.0
* 65 V/1.5 kV/3



37.702.8653.0
* DC 24 V
same as picture,
but with LED



Description	Type	Part No.	Std. Pack	
Actuator block	gray	WKF 1,5 KOA 2L	37.702.7653.0	50
Actuator block with LED	gray	WKF 1,5 KOA 2L/SL-PGE	37.702.8653.0	50

General data			
Width / length / height, incl. TS 7.5	5 mm / 71 mm / 48 mm		
Wire strip length	10 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 1.5 mm ²		
Cross section solid/stranded	0.13 – 1.5 mm ²		
Cross section, AWG	28–16		
Rated current	10 A		
Rated voltage	*		
Rated impulse voltage	65 V		
Pollution degree			

Accessories		Type	Part No.	Std. Pack
Wire entry guide	0.13–0.2 mm ²	LEL 1,5/1 WEISS	05.562.2453.0	100
	0.25–0.5 mm ²	LEL 1,5/2 GRAU	05.562.2553.0	100
	0.75–1.0 mm ²	LEL 1,5/3 SCHWARZ	05.562.2653.0	100
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5

VM WKF ...

- Connection module for 9 or 18 blocks




Description	Type	Part No.	Std. Pack	
Connection module for 9 blocks	black	VM WKF KO..9	69.700.0953.0	10
Connection module for 18 blocks	black	VM WKF KO..18	69.700.1853.0	5

General data			
Length: 9-pole module	L = 9 x 5 mm + 1.5 mm		
Length: 18-pole module	L = 18 x 5 mm + 1.5 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 1.5 mm ²		
Cross section solid/stranded	0.13 – 1.5 mm ²		
Cross section, AWG			
Rated current	10 A		
Rated voltage	*		
Rated impulse voltage	65 V		
Pollution degree			

fasis MINI

DIN rail terminal blocks with tension spring connection

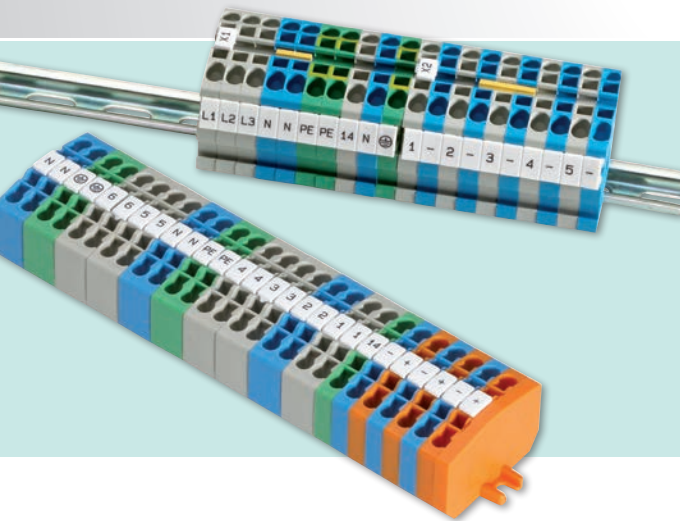


With our DIN rail terminal block system **fasis** MINI we focus on the application's size and flexibility. **fasis** MINI is a range of DIN rail terminal blocks in tension spring technology designed for installation in confined spaces.

The portfolio comprises ground blocks and feed-through blocks in various colors with 2 or 4 connections per potential.

The potential in the WKFM 2,5 terminal block series can be distributed, modified and extended quickly, flexibly and without problem by using cross connectors.

Designed to be mounted in various ways, including TS 35 and TS 15 DIN rails, backpanels, or inside distribution boxes, we provide different solutions including snap-on mounting feet, pins, and screw flanges.

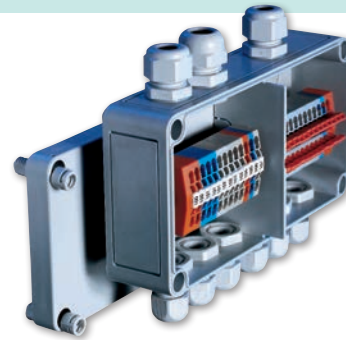

Application specific options

- Miniature terminal blocks with push-in mounting pin for installation directly onto the panel.
- Miniature terminal blocks with screw flange for installation directly onto the panel.
- Miniature terminal blocks for installation on TS 15 or TS 35 mounting rails.

Solutions for confined spaces

- Space-saving miniature terminal blocks in many designs for installation inside distribution boxes, motors and applications with confined space requirements.
- Easy wiring with user-friendly screwdriver entry guides at the top of the block.
- Marking tags easily readable even with the wires connected.
- Customized assembly design and marking using **wiemarc**.




Customized assembly

- DIN rail terminal blocks of the **fasis** MINI series are available in 2 and 4-pole configurations.
- **fasis** MINI blocks can be snapped together with the integrated latching pins, with or without a mounting rail.
- The various potentials and terminal blocks are visually distinguished by several color variations.
- Individual marking using marking tags or customized printing of the terminal blocks.

Permanent electrical connection



- The tension spring system provides a dynamic clamping connection. Load-controlled and thermal cold flow properties of the connected wires are balanced.
- Maintenance-free and gas-tight electrical connection as specified by the approvals. Customized layouts can be created individually.
- Separation of electrical and mechanical functions.

WKMF 2,5/15


- Feed-through block with tension spring connection for mounting on TS 15
- Nominal cross section 2.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack
Feed-through block	gray	WKMF 2,5/15	55.703.0053.0
Feed-through block	blue	WKMF 2,5/15	55.703.0053.6



General data				
Width / length / height, incl. TS 5.5	5 mm / 36 mm / 30 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2071 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-1			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.5–2.5 mm ²
Cross section solid/stranded	0.13–2.5 mm ²			0.5–2.5 mm ²
Cross section, AWG		26–12	26–12	
Rated current	24 A	20 A	20 A	19/20 A ¹⁾
Rated voltage	500 V	300 V	300 V	275 V ²⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ with/without jumper ²⁾ For maintaining the proper isolation distances, the open side of feed-through or ground blocks as well as both sides of a jumper are to be covered by partitions.			

WKMF 2,5 SL/15


- Ground block with tension spring connection for mounting on TS 15
- Nominal cross section 2.5 mm²
- Ex e II  II 2GD
Follow the EX installation instructions on page 170



Description	Type	Part No.	Std. Pack
Ground block	green/yellow	WKMF 2,5 SL/15	55.703.9053.0

General data				
Width / length / height, incl. TS 5.5	5 mm / 36 mm / 30 mm			
Wire strip length	10 mm			
Approvals	ATEX  KEMA 03 ATEX 2071 U			
Technical data	IEC	UL	CSA	
	EN 60 947-7-2			EN 60 079-0/-7
Cross section fine-stranded	0.13–2.5 mm ²			0.5–2.5 mm ²
Cross section solid/stranded	0.13–2.5 mm ²			0.5–2.5 mm ²
Cross section, AWG		26–12	26–12	
Rated current				
Rated voltage	500 V	300 V	300 V	¹⁾
Rated impulse voltage	6 kV			
Pollution degree	3			
Note	¹⁾ For maintaining the proper isolation distances, the open side of feed-through or ground blocks as well as both sides of a jumper are to be covered by partitions.			

Accessories for *fasis* WKMF 2,5...

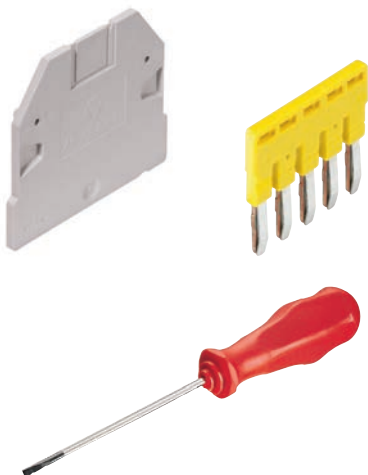

Accessories	Type	Part No.	Std. Pack
End plate, 1.5 mm wide	gray	APMF 2,5 /15	07.312.5953.0
Cross connector, insulated	2-pole	IVB WKMF 2,5–2	Z7.260.0229.0
	3-pole	IVB WKMF 2,5–3	Z7.260.0329.0
	4-pole	IVB WKMF 2,5–4	Z7.260.0429.0
	5-pole	IVB WKMF 2,5–5	Z7.260.0529.0
	10-pole	IVB WKMF 2,5–10	Z7.260.1029.0
	50-pole	IVB WKMF 2,5 M50	Z7.260.0029.0
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0

Mini terminal blocks with tension spring connection

WKF 2,5/M with flange

- Feed-through block with tension spring connection with or without flange
- Nominal cross section 2.5 mm²



WKF 2,5/M/F



WKF 2,5/M

Description	Type	Part No.	Std. Pack	
Feed-through block unmarked	gray	WKF 2,5/M	37.703.0553.0	100
Feed-through block unmarked	blue	WKF 2,5/M BLAU	37.703.0553.6	100
Feed-through block unmarked	orange	WKF 2,5/M ORANGE	37.703.0553.9	100
Feed-through block with flange	gray	WKF 2,5/M/F	39.703.0153.0	100
Feed-through block with flange	blue	WKF 2,5/M/F BLAU	39.703.0153.6	100
Feed-through block with flange	orange	WKF 2,5/M/F ORANGE	39.703.0153.9	100

General data			
Width / length / height	5 mm / 36 mm / 23 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG		22 – 12	24 – 12
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

WKF 2,5/MD with flange

- Duo feed-through block with tension spring connection with or without flange
- Nominal cross section 2.5 mm²



WKF 2,5/MD/F



WKF 2,5/MD

Description	Type	Part No.	Std. Pack	
Duo feed-through block unmarked	gray	WKF 2,5/MD	37.703.1053.0	100
Duo feed-through block unmarked	blue	WKF 2,5/MD BLAU	37.703.1053.6	100
Duo feed-through block unmarked	orange	WKF 2,5/MD ORANGE	37.703.1053.9	100
Duo feed-through block with flange	gray	WKF 2,5/MD/F	39.703.0253.0	100
Duo feed-through block with flange	blue	WKF 2,5/MD/F BLAU	39.703.0253.6	100
Duo feed-through block with flange	orange	WKF 2,5/MD/F ORANGE	39.703.0253.9	100

General data			
Width / length / height	10 mm / 36 mm / 23 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG		22 – 12	24 – 12
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories for *fasis* WKF 2,5/M...

Accessories	Type	Part No.	Std. Pack	
End plate with flange on the right	gray	APF 2,5/M.../F/R	07.312.3153.0	10
End plate with flange on the right	blue	APF 2,5/M.../F/R BLAU	07.312.3153.6	10
End plate with flange on the right	orange	APF 2,5/M.../F/R ORANGE	07.312.3153.9	10
Wire entry guide	0.13 – 0.2 mm ²	LEL 2,5/1 WEISS	05.561.6553.0	100
Wire entry guide	0.25 – 0.5 mm ²	LEL 2,5/2 GRAU	05.561.6653.0	100
Wire entry guide	0.75 – 1.0 mm ²	LEL 2,5/3 SCHWARZ	05.561.6753.0	100
Cross connector, insulated	2-pole		05.902.3500.0	10
Marking strip, unmarked	(4 x 22 pcs.)		04.244.0053.0	5
	marked (1 – 11)		04.844.2053.0	5
	marked (12 – 55)		04.844.2153.0	5
	marked (56 – 99)		04.844.2253.0	5
Screwdriver, uninsulated	DIN 5264 B 0,6 x 3,5		06.502.4000.0	5

WKF 2,5/M/R with mounting foot

- Feed-through block with tension spring connection, unmarked
- Nominal cross section 2.5 mm²



Mounting hole: Ø 3,5 mm
Plate thickness: 0,6–1,2 mm

Description	Type	Part No.	Std. Pack
Feed-through block unmarked	gray	WKF 2,5/M/R	38.703.0553.0
Feed-through block unmarked	blue	WKF 2,5/M/R BLAU	38.703.0553.6
Feed-through block unmarked	orange	WKF 2,5/M/R ORANGE	38.703.0553.9
General data			
Width / length / height	5 mm / 36 mm / 23 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG		22 – 12	24 – 12
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

WKF 2,5/MD/R with mounting foot

- Duo feed-through block with tension spring connection, unmarked
- Nominal cross section 2.5 mm²



Mounting hole: Ø 3,5 mm
Plate thickness: 0,6–1,2 mm

Description	Type	Part No.	Std. Pack
Duo feed-through block unmarked	gray	WKF 2,5/MD/R	38.703.1053.0
Duo feed-through block unmarked	blue	WKF 2,5/MD/R BLAU	38.703.1053.6
Duo feed-through block unmarked	orange	WKF 2,5/MD/R ORANGE	38.703.1053.9
General data			
Width / length / height	10 mm / 36 mm / 23 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG		22 – 12	24 – 12
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories for *fasis* WKF 2,5/M.../R

Accessories	Type	Part No.	Std. Pack
End plate	gray	APF 2,5/M...	07.312.2953.0
End plate	blue	APF 2,5/M... BLAU	07.312.2953.6
End plate	orange	APF 2,5/M... ORANGE	07.312.2953.9
Wire entry guide	0.13–0.2 mm ²	LEL 2,5/1 WEISS	05.561.6553.0
Wire entry guide	0.25–0.5 mm ²	LEL 2,5/2 GRAU	05.561.6653.0
Wire entry guide	0.75–1.0 mm ²	LEL 2,5/3 SCHWARZ	05.561.6753.0
Cross connector, insulated	2-pole		05.902.3500.0
Marking strip, unmarked	(4 x 22 pcs.)		04.244.0053.0
	marked (1–11)		04.844.2053.0
	marked (12–55)		04.844.2153.0
	marked (56–99)		04.844.2253.0
Screwdriver, uninsulated	DIN 5264 B 0,6 x 3,5		06.502.4000.0

Mini terminal blocks with tension spring connection

WKF 2,5/M/15

- Feed-through block with tension spring connection, unmarked, for mounting on TS 15
- Nominal cross section 2.5 mm²



Description	Type	Part No.	Std. Pack
Feed-through block unmarked	gray	WKF 2,5/M/15	55.703.0553.0
Feed-through block unmarked	blue	WKF 2,5/M/15 BLAU	55.703.0553.6
Feed-through block unmarked	orange	WKF 2,5/M/15 ORANGE	55.703.0553.9
Feed-through block unmarked	green	WKF 2,5/M/15 GRÜN	55.703.0553.7

General data			
Width / length / height, incl. TS 5.5	5 mm / 36 mm / 27 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG	22 – 12		
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

WKF 2,5/MD/15

- Duo feed-through block with tension spring connection, unmarked, for mounting on TS 15
- Nominal cross section 2.5 mm²



Description	Type	Part No.	Std. Pack
Duo feed-through block unmarked	gray	WKF 2,5/MD/15	55.703.1053.0
Duo feed-through block unmarked	blue	WKF 2,5/MD/15 BLAU	55.703.1053.6
Duo feed-through block unmarked	orange	WKF 2,5/MD/15 ORANGE	55.703.1053.9
Duo feed-through block unmarked	green	WKF 2,5/MD/15 GRÜN	55.703.1053.7

General data			
Width / length / height, incl. TS 5.5	10 mm / 36 mm / 27 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG	22 – 12		
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

WKF 2,5/M/35

- Feed-through block with tension spring connection, unmarked, for mounting on TS 35
- Nominal cross section 2.5 mm²



Description	Type	Part No.	Std. Pack
Feed-through block unmarked	gray	WKF 2,5/M/35	56.703.0553.0
Feed-through block unmarked	blue	WKF 2,5/M/35 BLAU	56.703.0553.6
Feed-through block unmarked	orange	WKF 2,5/M/35 ORANGE	56.703.0553.9
Feed-through block unmarked	green	WKF 2,5/M/35 GRÜN	56.703.0553.7

General data			
Width / length / height, incl. TS 7.5	5 mm / 36 mm / 32 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG	22 – 12		
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

WKF 2,5/MD/35

- Duo-Feed-through block with tension spring connection, unmarked, for mounting on TS 35
- Nominal cross section 2.5 mm²



Description	Type	Part No.	Std. Pack
Duo-Feed-through block unmarked	gray	WKF 2,5/MD/35	56.703.1053.0
Duo-Feed-through block unmarked	blue	WKF 2,5/MD/35 BLAU	56.703.1053.6
Duo-Feed-through block unmarked	orange	WKF 2,5/MD/35 ORANGE	56.703.1053.9
Duo-Feed-through block unmarked	green	WKF 2,5/MD/35 GRÜN	56.703.1053.7


General data			
Width / length / height, incl. TS 7.5	10 mm / 36 mm / 32 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60947-7-1		
Cross section fine-stranded	0.13 – 2.5 mm ²		
Cross section solid/stranded	0.13 – 4 mm ²		
Cross section, AWG	22 – 12		
Rated current	24 A	20 A	25 A
Rated voltage	800 V	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		

Accessories for *fasis* WKF 2,5/M...


Accessories	Type	Part No.	Std. Pack
End plate	gray	APF 2,5/M...	07.312.2953.0
End plate	blue	APF 2,5/M... BLAU	07.312.2953.6
End plate	orange	APF 2,5/M... ORANGE	07.312.2953.9
Wire entry guide	0.13–0.2 mm ²	LEL 2,5/1 WEISS	05.561.6553.0
Wire entry guide	0.25–0.5 mm ²	LEL 2,5/2 GRAU	05.561.6653.0
Wire entry guide	0.75–1.0 mm ²	LEL 2,5/3 SCHWARZ	05.561.6753.0
Cross connector, insulated	2-pole		05.902.3500.0
Marking strip, unmarked	(4 x 22 pcs.)		04.244.0053.0
	marked (1–11)		04.844.2053.0
	marked (12–55)		04.844.2153.0
	marked (56–99)		04.844.2253.0
	yellow, unmarked		04.244.0053.8
Screwdriver, uninsulated	DIN 5264 B 0,6 x 3,5		06.502.4000.0

fasis BIT

DIN rail terminals for installation distribution boards with tension spring connection

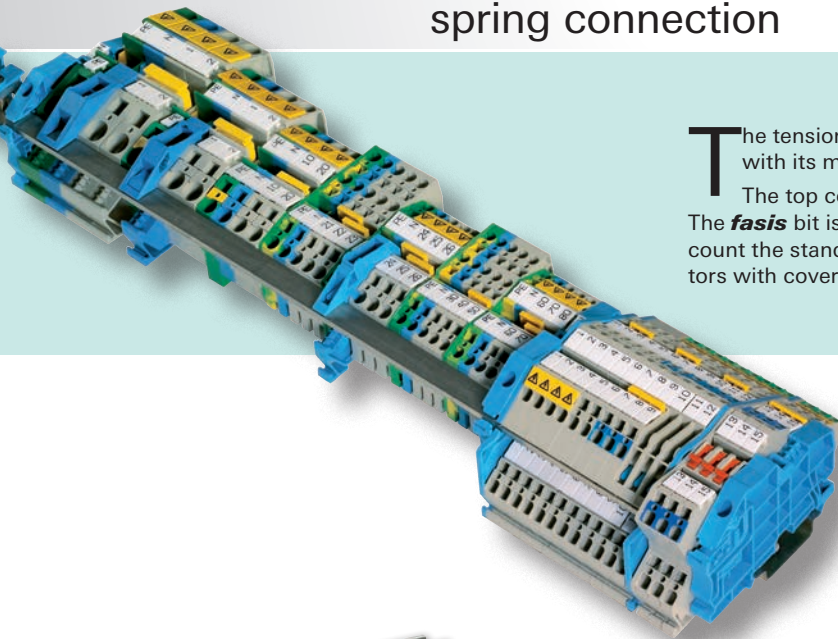

The tension spring connection of the **fasis** bit series impresses users with its maintenance-free and vibration-proof connection mechanism. The top connection from above is especially suitable for tight spaces. The **fasis** bit is designed for use in distribution systems and takes into account the standardized dimensions for small distributors and field distributors with covers in accordance with DIN 43871.

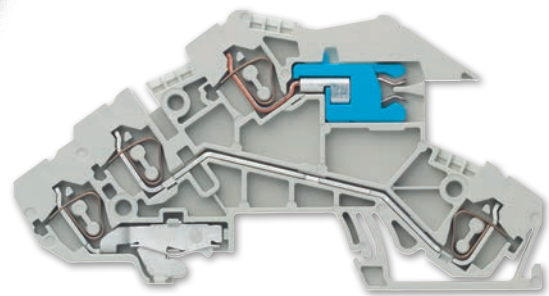


Simple testing

- Function test with modular test adapter
- Integrated test jacks in all blocks


Space-saving wiring

- Clear wiring and assignment of electrical circuits through three-story design in 5 mm assembly width
- Neutral conductor, current throughput, and green conductor connection in just one terminal
- Safety and convenience through switchable N disconnect function

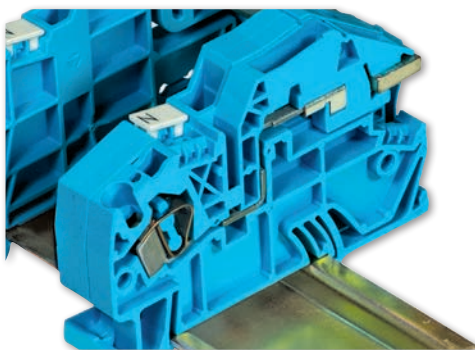

Convenient switching and operation

- Screwless, maintenance-free spring-force device
- Easy conductor feed and operation from above
- Safety and operation convenience even with disconnection of the neutral conductor from the neutral busbar for insulation measurement using slide-gate valve with optical control.

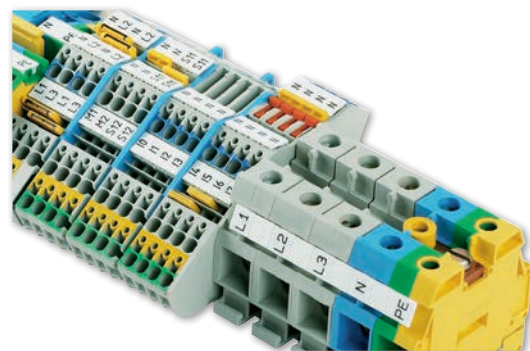


Combinable in the system

- Problem-free combination of installation terminals with other Wieland terminal blocks, also with different connection equipment
- For example:
 - Circuit wiring with compact spring-force device **fasis** BIT
 - Power feed with proven **selos** screw technology
- Low storage and logistics expense due to uniform accessories

Neutral disconnect blocks for installation distribution boards with tension spring connection

WKF 4 NT


- Neutral disconnect block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²

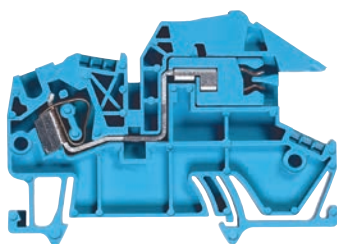

Description	Type	Part No.	Std. Pack
Neutral disconnect terminal	blue WKF 4 NT / 35	56.704.8153.0	100
General data			
Width / length / height, incl. TS 7.5	6 mm / 69.5 mm / 51.2 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-4 mm ²		
Cross section solid/stranded	0.14-6 mm ²		
Cross-section, AWG		22-10 AWG	
Rated current	25 A		
Rated voltage	400 V	600 V	
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	APF 4 NT	07.312.5653.0	10
Jumper bar	2-pole IVBWKF 4 - 2	Z7.261.1227.0	10
	3-pole IVBWKF 4 - 3	Z7.261.1327.0	10
	10-pole IVBWKF 4 - 10	Z7.261.2027.0	20
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1
Connection clamp for busbar	WAK16/2 BL/V0	30.494.3021.6	100
Connection clamp for busbar	WAK35/2 BL/V0	30.494.4021.6	100
Connection clamp for busbar	WAK35/2	30.494.4121.0	50

WKF 10 NT


- Neutral disconnect block with tension spring connection for mounting on TS 35
- Nominal cross section 10 mm²
- Enclosed design

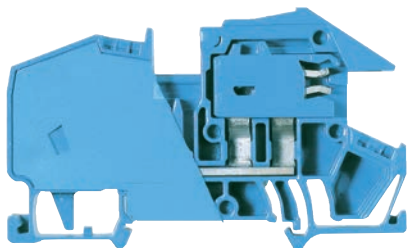

Description	Type	Part No.	Std. Pack
Neutral disconnect terminal	blue WKF 10 NT/35	56.710.8153.0	50
General data			
Width / length / height, incl. TS 7.5	10 mm / 82 mm / 51.2 mm		
Wire strip length	13 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	2.5-10 mm ²		
Cross section solid/stranded	2.5-10 mm ²		
Cross-section, AWG			
Rated current	57 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
Jumper bar	2-pole IVBWKF 10- 2	Z7.283.8227.0	10
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1
Connection clamp for busbar	WAK16/2 BL/V0	30.494.3021.6	100
Connection clamp for busbar	WAK35/2 BL/V0	30.494.4021.6	100
Connection clamp for busbar	WAK35/2	30.494.4121.0	50

WKIF 16 NT

- Neutral disconnect block with tension spring connection for mounting on TS 35
- Nominal cross section 16 mm²
- Enclosed design

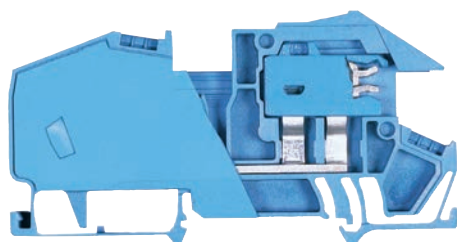


Description	Type	Part No.	Std. Pack
Neutral disconnect terminal	blue WKIF 16/1 NT/35	56.716.8155.0	20
General data			
Width / length / height, incl. TS 7.5	12 mm / 94 mm / 51.2 mm		
Wire strip length	15 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	4-16 mm ²		
Cross section solid/stranded	4-16 mm ²		
Cross-section, AWG			
Rated current	76 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
Jumper bar	2-pole IVBWKF 16- 2	Z7.284.4227.0	10
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1
Connection clamp for busbar	WAK16/2 BL/V0	30.494.3021.6	100
Connection clamp for busbar	WAK35/2 BL/V0	30.494.4021.6	100
Connection clamp for busbar	WAK35/2	30.494.4121.0	50

Feed-through blocks for installation distribution boards with tension spring connection

WKF 2.5

- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

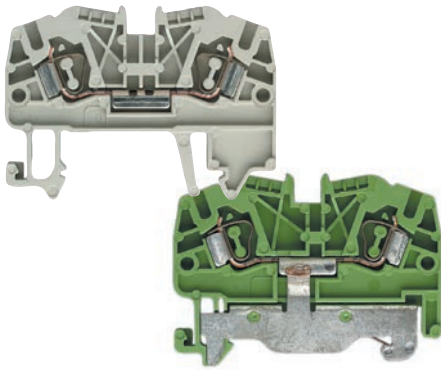

Description	Type	Part No.	Std. Pack	
Feed-through terminal	gray	WKF 2,5 / 35	56.703.0053.0	100
	blue	WKF 2,5 / 35 BLAU	56.703.0053.6	100
Feed-through terminal block	green/yellow	WKF 2,5 SL / 35	56.703.9053.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 5 mm / 42.3 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.13-2.5 mm ²			
Cross section solid/stranded	0.13-4 mm ²			
Cross-section, AWG		22-12 AWG	24-12 AWG	
Rated current	24 A	20 A	20 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
	Type	Part No.	Std. Pack	
End plate	APF 2,5 - 4	07.312.2153.0	10	
Partition	TWF 2,5 - 4	07.312.2253.0	10	
Jumper bar	2-pole	IVBWKf 2,5 - 2	27.280.6227.0	10
	3-pole	IVBWKf 2,5 - 3	27.280.6327.0	10
	10-pole	IVBWKf 2,5 - 10	27.280.7027.0	20

WKF 4


- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 4 mm²



Description	Type	Part No.	Std. Pack	
Feed-through terminal	gray	WKF 4 / 35	56.704.0053.0	100
	blue	WKF 4 / 35 BLAU	56.704.0053.6	100
Feed-through terminal block	green/yellow	WKF 4 SL / 35/V0	56.704.9053.0	100
General data				
Width / length / height, incl. TS 7.5	6 mm / 57 mm / 42.3 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.13-4 mm ²			
Cross section solid/stranded	0.13 - 6 mm ²			
Cross-section, AWG		22-10 AWG	22-10 AWG	
Rated current	32 A	20 A	20 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
	Type	Part No.	Std. Pack	
End plate	APF 2,5 - 4	07.312.2153.0	10	
Partition	TWF 2,5 - 4	07.312.2253.0	10	
Jumper bar	2-pole	IVBWKf 4 - 2	27.261.1227.0	10
	3-pole	IVBWKf 4 - 3	27.261.1327.0	10
	10-pole	IVBWKf 4 - 10	27.261.2027.0	20

WKF 6

- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 6 mm²
- Enclosed design

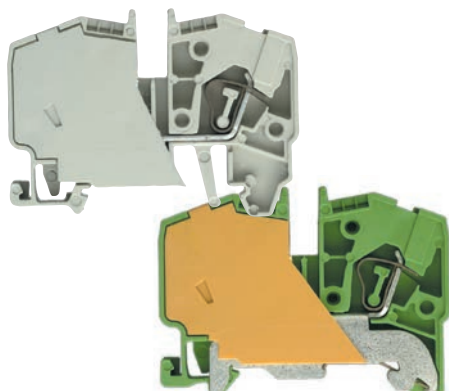

Description	Type	Part No.	Std. Pack	
Feed-through terminal	gray	WKF 6/35	56.706.0053.0	100
	blue	WKF 6/35 BLAU	56.706.0053.6	100
Feed-through terminal block	green/yellow	WKF 6SL/35	56.706.9053.0	100
General data				
Width / length / height, incl. TS 7.5	8 mm / 61 mm / 45.1 mm			
Wire strip length	12 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.5 - 6 mm ²			
Cross section solid/stranded	0.5 - 6 mm ²			
Cross-section, AWG		20-10 AWG	20-10 AWG	
Rated current	41 A	40 A	40 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
	Type	Part No.	Std. Pack	
Jumper bar	2-pole	IVBWKf 6- 2	27.282.4227.0	10

WKF 10

- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 10 mm²
- Enclosed design




Description	Type	Part No.	Std. Pack	
Feed-through terminal	gray	WKF 10/35	56.710.0053.0	50
	blue	WKF 10/35 BLAU	56.710.0053.6	50
Feed-through terminal block	green/yellow	WKF 10SL/35	56.710.9053.0	50

General data				
Width / length / height, incl. TS 7.5	10 mm / 70 mm / 47.5 mm			
Wire strip length	13 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	2.5-10 mm ²			
Cross section solid/stranded	2.5-10 mm ²			
Cross-section, AWG		14-8 AWG	14-8 AWG	
Rated current	57 A	55 A	55 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories	Type	Part No.	Std. Pack	
Jumper bar	2-pole	IVBWK 10- 2	Z7.283.8227.0	10

WKIF 16

- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 16 mm²
- Enclosed design

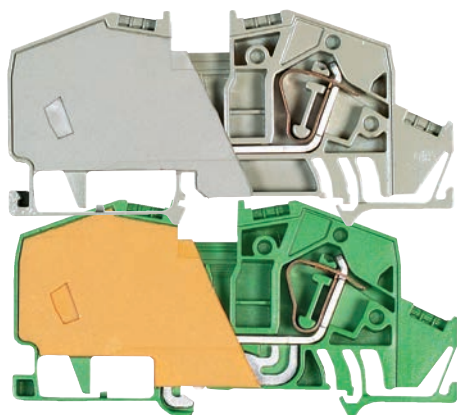

Description	Type	Part No.	Std. Pack	
Feed-through terminal	gray	WKIF 16/1 /35	56.716.1155.0	20
	blue	WKIF 16/1 /35 BLAU	56.716.1155.6	20
Feed-through terminal block	green/yellow	WKIF 16/1 SL/35	56.716.9155.0	20

General data				
Width / length / height, incl. TS 7.5	12 mm / 94 mm / 47.7 mm			
Wire strip length	16 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	4-16 mm ²			
Cross section solid/stranded	4-16 mm ²			
Cross-section, AWG				
Rated current	76 A			
Rated voltage	800 V			
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories	Type	Part No.	Std. Pack	
Jumper bar	2-pole	IVBWK 16- 2	Z7.284.4227.0	10

WKF 16

- Feed-through block with tension spring connection for mounting on TS 35
- Nominal cross section 16 mm²
- Enclosed design



Description	Type	Part No.	Std. Pack	
Feed-through terminal	gray	WKF 16/35	56.716.0053.0	50
	blue	WKF 16/35 BLAU	56.716.0053.6	50
Feed-through terminal block	green/yellow	WKF 16SL/35	56.716.9053.0	50


General data				
Width / length / height, incl. TS 7.5	12 mm / 82 mm / 47.7 mm			
Wire strip length	15 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	4-16 mm ²			
Cross section solid/stranded	4-16 mm ²			
Cross-section, AWG		24-4 AWG	12-4 AWG	
Rated current	76 A	75 A	75 A	
Rated voltage	800 V	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			

Accessories	Type	Part No.	Std. Pack	
Jumper bar	2-pole	IVBWK 16- 2	Z7.284.4227.0	10

Multi-tier terminals for installation distribution boards with tension spring connection

WKIF 2.5 D

- Installation multi-tier terminal with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

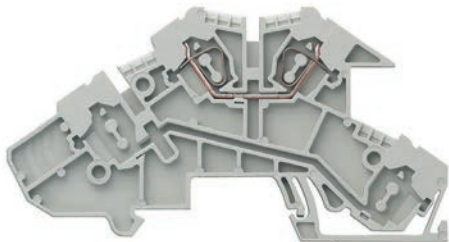

Description	Type	Part No.	Std. Pack
Installation rail terminal blocks	WKIF 2,5 D	56.703.9653.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 95 mm / 51.2 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-2.5 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG		22-12 AWG	22-14 AWG
Rated current	24 A	20 A	20 A
Rated voltage	400 V		300 V
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	Type APIF 2,5	Part No. 07.311.8353.0	Std. Pack 10
Jumper bar	2-pole	IVBWK 2,5 - 2	7.280.6227.0
	3-pole	IVBWK 2,5 - 3	7.280.6327.0
	4-pole	IVBWK 2,5 - 4	7.280.6427.0
	5-pole	IVBWK 2,5 - 5	7.280.6527.0
	10-pole	IVBWK 2,5 - 10	7.280.7027.0
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKIF 2.5 D-D

WKID 2,5 N-D

- Installation multi-tier terminal with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²



Description	Type	Part No.	Std. Pack
Installation rail terminal blocks	WKIF 2,5 D-D	56.703.9753.0	50
	WKIF 2,5 N-D	56.703.9953.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 95 mm / 51.2 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-2.5 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG		22-12 AWG	22-14 AWG
Rated current	24 A	20 A	20 A
Rated voltage	400 V		300 V
Rated impulse voltage	4 kV		
Pollution degree	3		
Accessories			
End plate	Type APIF 2,5	Part No. 07.311.8353.0	Std. Pack 10
Jumper bar	2-pole	IVBWK 2,5 - 2	7.280.6227.0
	3-pole	IVBWK 2,5 - 3	7.280.6327.0
	10-pole	IVBWK 2,5 - 10	7.280.7027.0
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKIF 2.5 D-D-SL

WKIF 2.5 N-D-SL


- Installation multi-tier terminal with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²



Description	Type	Part No.	Std. Pack
Installation rail terminal blocks	WKIF 2,5 D-D-SL	56.703.9853.0	50
	WKIF 2,5 N-D-SL	56.703.9453.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 95 mm / 51.2 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-2.5 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG		22-12 AWG	22-14 AWG
Rated current	24 A	20 A	20 A
Rated voltage	400 V		300 V
Rated impulse voltage	4 kV		
Pollution degree	3		
Accessories			
End plate	Type APIF 2,5	Part No. 07.311.8353.0	Std. Pack 10
Jumper bar	2-pole	IVBWK 2,5 - 2	7.280.6227.0
	3-pole	IVBWK 2,5 - 3	7.280.6327.0
	10-pole	IVBWK 2,5 - 10	7.280.7027.0
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKIF 2.5 NT-D-SL


- Installation multi-tier terminal with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

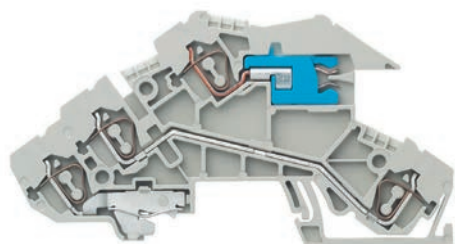


Description	Type	Part No.	Std. Pack	
Installation rail terminal blocks	WKIF 2,5 NT-D-SL	56.703.9553.0	50	
General data				
Width / length / height, incl. TS 7.5	5 mm / 95 mm / 51.2 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.14-2.5 mm ²			
Cross section solid/stranded	0.14-4 mm ²			
Cross-section, AWG		22-12 AWG	22-14 AWG	
Rated current	20 A	20 A	20 A	
Rated voltage	400 V		300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	Type	Part No.	Std. Pack	
	APIF 2,5	07.311.8353.0	10	
Jumper bar	2-pole	IVBWK 2,5 - 2	Z7.280.6227.0	10
	3-pole	IVBWK 2,5 - 3	Z7.280.6327.0	10
	4-pole	IVBWK 2,5 - 4	Z7.280.6427.0	10
	5-pole	IVBWK 2,5 - 5	Z7.280.6527.0	10
	10-pole	IVBWK 2,5 - 10	Z7.280.7027.0	20
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1	

WKIF 2.5 NTM-D-SL

- Installation multi-tier terminal with tension spring connection for mounting on TS 35
- Nominal cross section 2.5 mm²

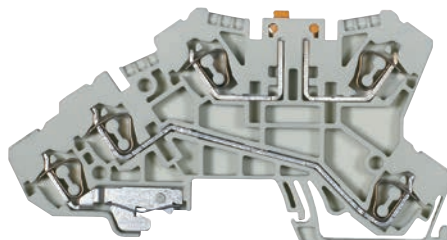

Description	Type	Part No.	Std. Pack	
Installation rail terminal blocks	WKIF 2,5 NTM-D-SL	56.703.8653.0	50	
General data				
Width / length / height, incl. TS 7.5	5 mm / 95 mm / 51.2 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			
Cross section fine-stranded	0.14-2.5 mm ²			
Cross section solid/stranded	0.14-4 mm ²			
Cross-section, AWG				
Rated current	16 A			
Rated voltage	400 V			
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	Type	Part No.	Std. Pack	
	APIF 2,5 TM	07.312.8053.0	10	
Jumper bar	2-pole	IVBWK 2,5 - 2	Z7.280.6227.0	10
	3-pole	IVBWK 2,5 - 3	Z7.280.6327.0	10
	4-pole	IVBWK 2,5 - 4	Z7.280.6427.0	10
	5-pole	IVBWK 2,5 - 5	Z7.280.6527.0	10
	10-pole	IVBWK 2,5 - 10	Z7.280.7027.0	20

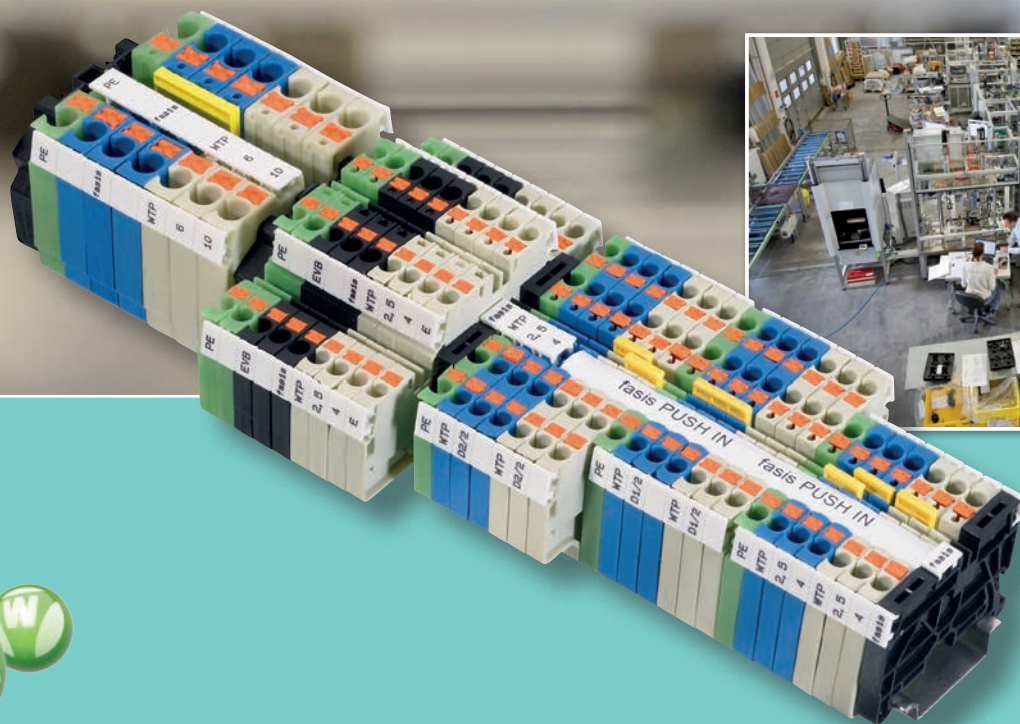

fasis WTP

DIN rail terminal blocks with push-in connection

Terminate wires easily, directly and without tools!
fasis WTP – DIN rail terminal blocks with push-in connection.

Built according to an effective and comprehensive concept, including compact design and high-performance contact technology, **fasis** WTP reduces installation time and keeps inventory costs to a minimum.



The product line includes feed-through and ground blocks with 2, 3 or 4 termination points, as well as multi-tier blocks.

fasis WTP has been designed for use in machinery and plant engineering, as well as power distribution for buildings.

Connection cross-sections up to 10 mm²

Rated current of up to 57 A


Rated voltage of up to 1000 V

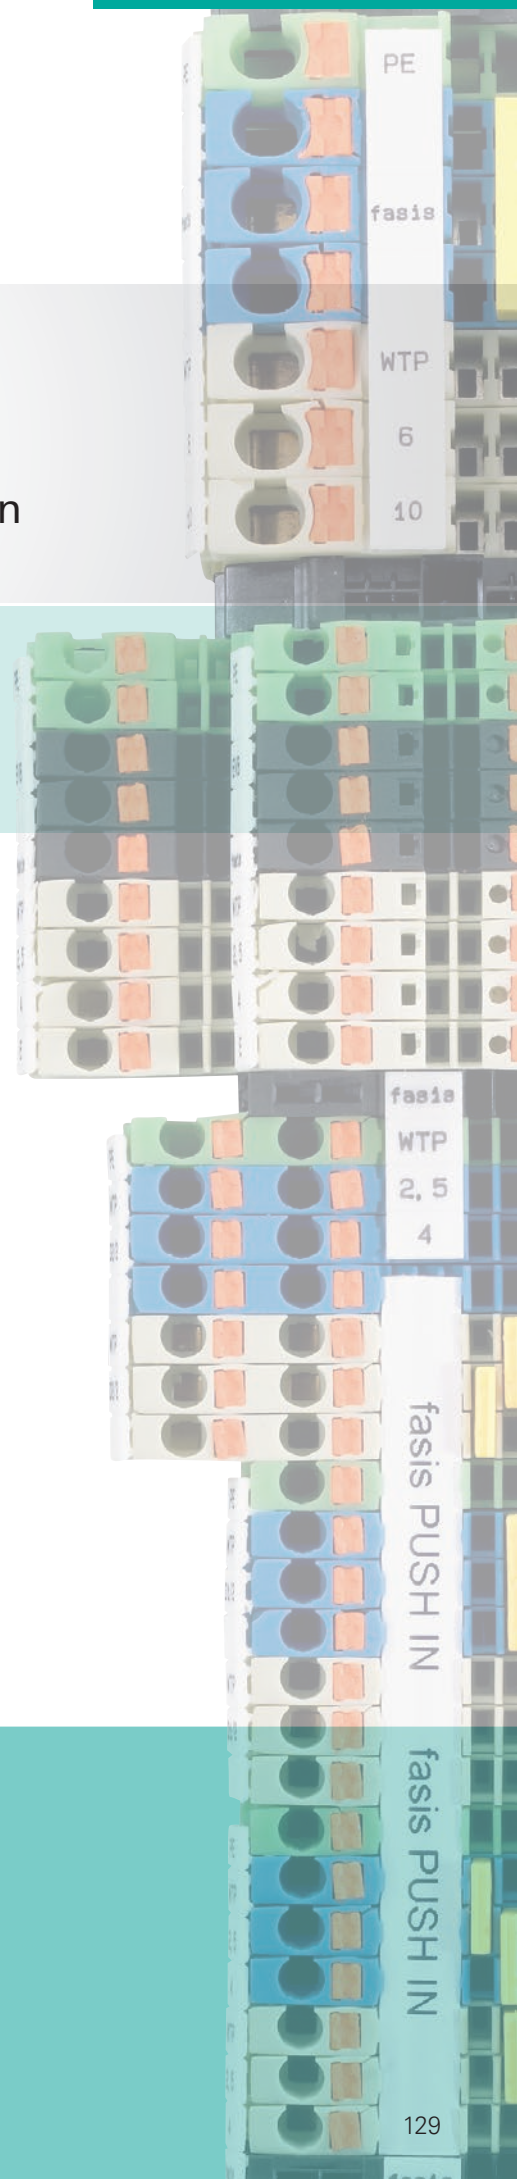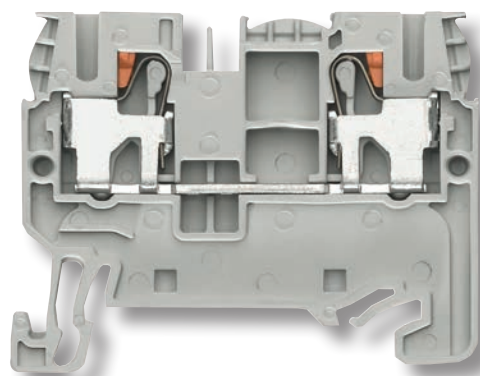

fasis WTP – wires simply push-in



fasis push-in				
Nominal cross section	2.5 mm ²	4 mm ²	6 mm ²	10 mm ²
Rated current	30 A		57 A	
Width	5 mm		8 mm	
	⇩		⇩	
	WTP 2,5/4		WTP 6/10	

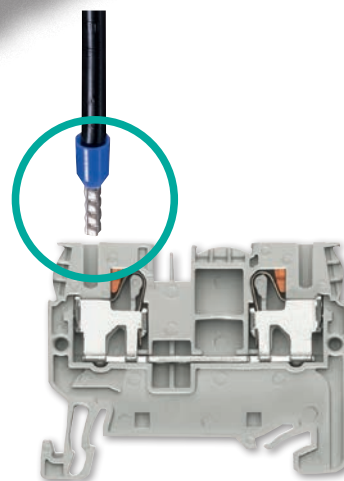


The same functionality – fewer items

- 2.5 & 4 mm² and 6 & 10 mm² in one block


Connect without tools

- Push-in connection
- Wires connect directly

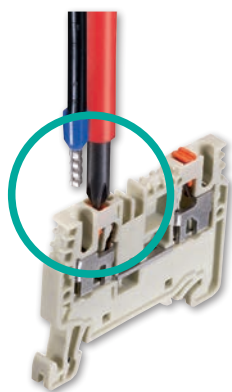

Integrated release lever


- No mix-up of wire-entry and screwdriver entry points
- No contact with live parts
- Use of Philips head screwdriver also possible

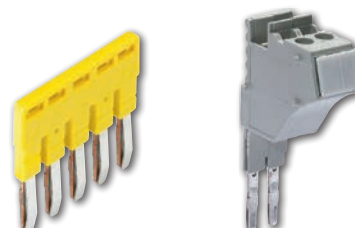

Plug & Play – Completing the Concept

- Dual jumpering channels
- Plug-in jumper bars
- Plug-in test adapter

Wieland jumpering system – Perfect technology

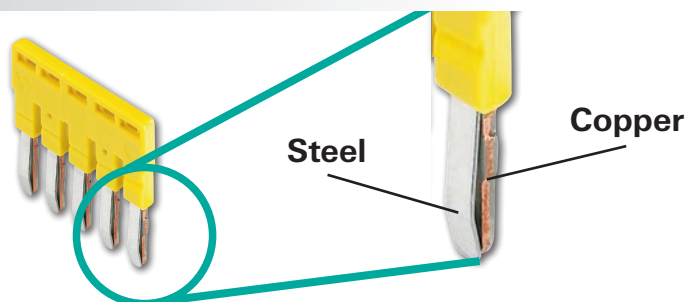


Perfect technology

- Copper current bar guarantees low contact resistance
- Steel spring guarantees strength, durability, and long-term stability



Extremely rugged!


- Indestructible steel spring
- Vibration-proof connection

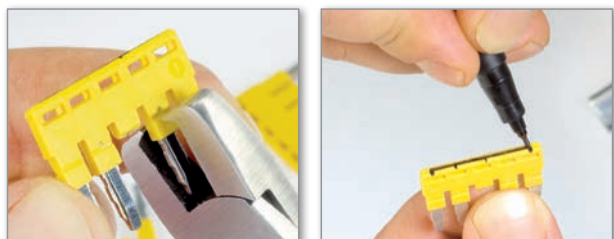

Simple customization

- Individual poles easy to remove
- Circuits easy to identify

Wieland marking system – Reliable identification

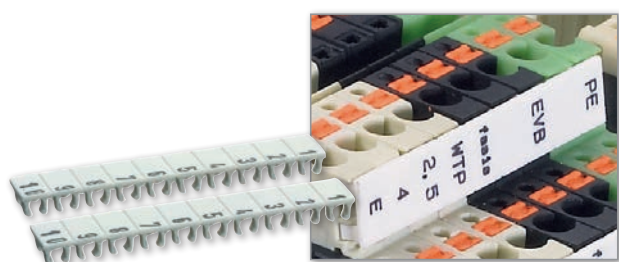


Marking strips – Dependable

- Maximum hold to the terminal
- Solidify integrity of the assembly



Endless strip – Effective

- Mounting facility for endless strips permits single step marking of entire assembly
- Continuous labeling
- Uses commercially available labeling systems

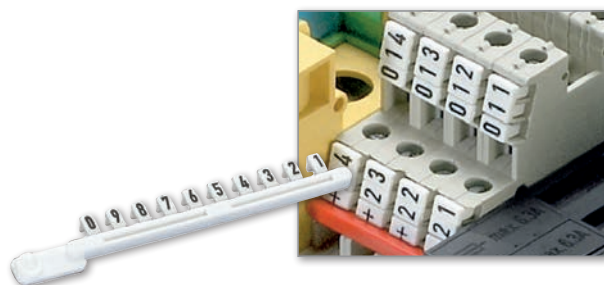


Marking tags – Individual

- Individual labeling with minimum effort
- Ideal for service and maintenance

Feed-through blocks with push-in connection

WTP 2,5/4

- Feed-through block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²




* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WTP 2,5/4	56.203.0055.0
Feed-through block	blue	WTP 2,5/4 BLAU	56.203.0055.6
General data			
Width / length / height, incl. TS 7.5	5 mm / 47 mm / 38 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		pending
Cross section fine-stranded	0.2–4 mm ²		
Cross section solid/stranded	0.2–4 mm ²		
Cross section, AWG		24–12	22–12
Rated current (UL field/factory wiring)	30 A	20 A/30 A	20 A
Rated voltage	800 V*	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	APFN 2,5	07.312.6755.0
Partition	gray	TWFN 2,5	07.312.6855.0

WTP 2,5/4 D1/2

- Duo feed-through block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

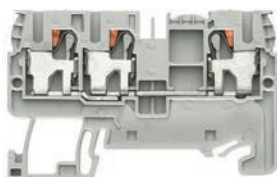


* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WTP 2,5/4 D1/2	56.203.5055.0
Feed-through block	blue	WTP 2,5/4 D1/2 BLAU	56.203.5055.6
General data			
Width / length / height, incl. TS 7.5	5 mm / 60 mm / 38 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		pending
Cross section fine-stranded	0.2–4 mm ²		
Cross section solid/stranded	0.2–4 mm ²		
Cross section, AWG		24–12	22–12
Rated current (UL field/factory wiring)	30 A	20 A/30 A	20 A
Rated voltage	800 V*	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	APFN 2,5 D1/2	07.312.6955.0
Partition	gray	TWFN 2,5 D1/2	07.312.7055.0

WTP 2,5/4 D2/2

- Duo feed-through block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

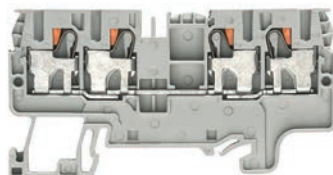


* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WTP 2,5/4 D2/2	56.203.5155.0
Feed-through block	blue	WTP 2,5/4 D2/2 BLAU	56.203.5155.6
General data			
Width / length / height, incl. TS 7.5	5 mm / 72 mm / 38 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		pending
Cross section fine-stranded	0.2–4 mm ²		
Cross section solid/stranded	0.2–4 mm ²		
Cross section, AWG		24–12	22–12
Rated current (UL field/factory wiring)	30 A	20 A/30 A	20 A
Rated voltage	800 V*	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	APFN 2,5 D2/2	07.312.7155.0
Partition	gray	TWFN 2,5 D2/2	07.312.7255.0

Accessories for WTP 2,5/4...


Description	Type	Part No.	Std. Pack
Cross connector, insulated	2-pole	IVB WKF 2,5–2	Z7.280.6227.0
	3-pole	IVB WKF 2,5–3	Z7.280.6327.0
	4-pole	IVB WKF 2,5–4	Z7.280.6427.0
	5-pole	IVB WKF 2,5–5	Z7.280.6527.0
	10-pole	IVB WKF 2,5–10	Z7.280.7027.0
	20-pole	IVB WKF 2,5–20	Z7.280.8027.0
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0
	0.25–0.5 mm ²	LELN 2,5/2 GRAU	05.564.3855.0
	0.75–1.0 mm ²	LELN 2,5/3 SCHWARZ	05.564.3955.0
Test adapter, modular		PS WKC/F	Z1.299.9753.0
Test plug		ST 2/2,3	Z5.553.2921.0
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0

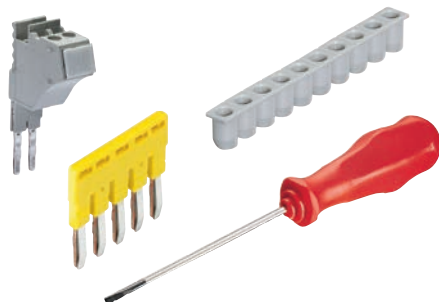

Feed-through blocks with push-in connection

WTP 6/10

- Feed-through block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²

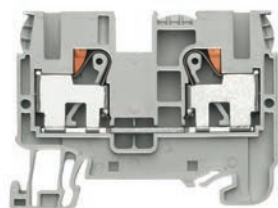


* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WTP 6/10	56.206.0055.0
Feed-through block	blue	WTP 6/10 BLAU	56.206.0055.6
General data			
Width / length / height, incl. TS 7.5	8 mm / 58 mm / 44 mm		
Wire strip length	15 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		pending
Cross section fine-stranded	0,2–10 mm ²		
Cross section solid/stranded	0.2–10 mm ²		
Cross section, AWG		10–8	12–8
Rated current	57 A	41 A	41 A
Rated voltage	1000 V*	600 V	600 V
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	AP WTP 6/10	07.313.4155.0
Partition	gray	TW WTP 6/10	07.313.4255.0

WTP 6/10 D1/2

- Feed-through block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²

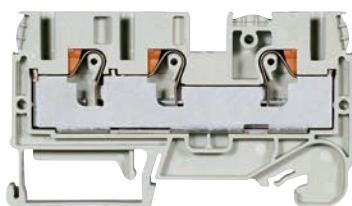


* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WTP 6/10 D1/2	56.206.5055.0
Feed-through block	blue	WTP 6/10 D1/2 BLAU	56.206.5055.6
General data			
Width / length / height, incl. TS 7.5	8 mm / 77 mm / 44 mm		
Wire strip length	15 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1	pending	pending
Cross section fine-stranded	0,2–10 mm ²		
Cross section solid/stranded	0.2–10 mm ²		
Cross section, AWG			
Rated current	57 A		
Rated voltage	1000 V*		
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	AP WTP 6/10 D1/2	07.313.5355.0
Partition	gray	TW WTP 6/10 Dx/2	07.313.5255.0

WTP 6/10 D2/2

- Feed-through block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²

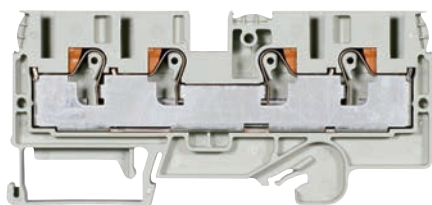

* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Description	Type	Part No.	Std. Pack
Feed-through block	gray	WTP 6/10 D2/2	56.206.5155.0
Feed-through block	blue	WTP 6/10 D2/2 BLAU	56.206.5155.6
General data			
Width / length / height, incl. TS 7.5	8 mm / 94 mm / 44 mm		
Wire strip length	15 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1	pending	pending
Cross section fine-stranded	0,2–10 mm ²		
Cross section solid/stranded	0.2–10 mm ²		
Cross section, AWG			
Rated current	57 A		
Rated voltage	1000 V*		
Rated impulse voltage	8 kV		
Pollution degree	3		
Accessories			
End plate	gray	AP WTP 6/10 D2/2	07.313.5455.0
Partition	gray	TW WTP 6/10 Dx/2	07.313.5255.0

Accessories for *fasis* WTP 6/10....




Accessories	Type	Part No.	Std. Pack
Cross connector, insulated, I _N : 41 A	2-pole	IVB WKFN 6–2	Z7.282.5227.0
(57 A when using	3-pole	IVB WKFN 6–3	Z7.282.5327.0
two cross connectors)	4-pole	IVB WKFN 6–4	Z7.282.5427.0
	5-pole	IVB WKFN 6–5	Z7.282.5527.0
Test plug	ST 2/2,3		Z5.553.2921.0
Screwdriver, uninsulated	DIN 5264 B 0,8x4		06.502.4100.0

Ground blocks with push-in connection

WTP 2,5/4 PE

- Ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²




* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WTP 2,5/4 PE	56.203.9055.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 47 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			pending
Cross section fine-stranded	0.2–4 mm ²			
Cross section solid/stranded	0.2–4 mm ²			
Cross section, AWG		24–12	22–12	
Rated current				
Rated voltage	800 V*	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5	07.312.6755.0	10
Partition	gray	TWFN 2,5	07.312.6855.0	10

WTP 2,5/4 D1/2/PE

- Duo ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

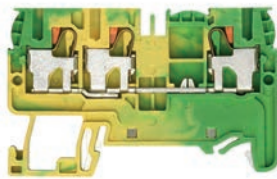


* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WTP 2,5/4 D1/2/PE	56.203.9355.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 60 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			pending
Cross section fine-stranded	0.2–4 mm ²			
Cross section solid/stranded	0.2–4 mm ²			
Cross section, AWG		24–12	22–12	
Rated current				
Rated voltage	800 V*	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 D1/2	07.312.6955.0	10
Partition	gray	TWFN 2,5 D1/2	07.312.7055.0	10

WTP 2,5/4 D2/2/PE

- Duo ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

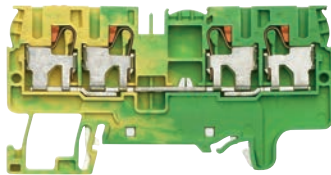

* When cross connector IVB WKF 2,5-... is used, the rated voltage must be reduced to 630 V.

Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WTP 2,5/4 D2/2/PE	56.203.9155.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 72 mm / 38 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			pending
Cross section fine-stranded	0.2–4 mm ²			
Cross section solid/stranded	0.2–4 mm ²			
Cross section, AWG		24–12	22–12	
Rated current				
Rated voltage	800 V*	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 D2/2	07.312.7155.0	10
Partition	gray	TWFN 2,5 D2/2	07.312.7255.0	10


Accessories for *fasis* WTP 2,5/4...



Accessories	Type	Part No.	Std. Pack	
Wire entry guide	0.13–0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0	100
	0.25–0.5 mm ²	LELN 2,5/2 GRAU	05.564.3855.0	100
	0.75–1.0 mm ²	LELN 2,5/3 SCHWARZ	05.564.3955.0	100
Test adapter, modular	PS WKC/F	Z1.299.9753.0	10	
Test plug	ST 2/2,3	Z5.553.2921.0	10	
Screwdriver, uninsulated	DIN 5264 B 0,6x3,5	06.502.4000.0	5	
Screwdriver, uninsulated, MINI	DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	

WTP 6/10 PE

- Ground block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²

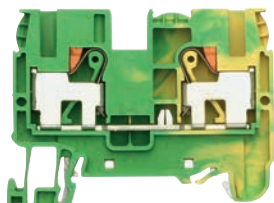


* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WTP 6/10 PE	56.206.9055.0	100
General data				
Width / length / height, incl. TS 7.5	8 mm / 58 mm / 44 mm			
Wire strip length	15 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			pending
Cross section fine-stranded	0.2 – 10 mm ²			
Cross section solid/stranded	0.2 – 10 mm ²			
Cross section, AWG	10–8			
Rated current	12–8			
Rated voltage	1000 V*	600 V	600 V	
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP WTP 6/10	07.313.4155.0	10
Partition	gray	TW WTP 6/10	07.313.4255.0	10

WTP 6/10 D1/2 PE

- Ground block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²

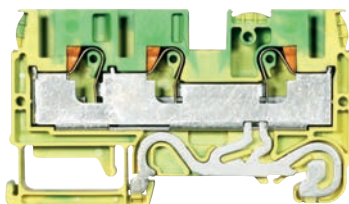


* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WTP 6/10 D1/2 PE	56.206.9355.0	50
General data				
Width / length / height, incl. TS 7.5	8 mm / 77 mm / 44 mm			
Wire strip length	15 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2	pending	pending	pending
Cross section fine-stranded	0.2 – 10 mm ²			
Cross section solid/stranded	0.2 – 10 mm ²			
Cross section, AWG				
Rated current				
Rated voltage	1000 V*			
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP WTP 6/10 D1/2	07.313.5355.0	10
Partition	gray	TW WTP 6/10 Dx/2	07.313.5255.0	10

WTP 6/10 D2/2 PE

- Ground block with push-in connection for mounting on TS 35
- Nominal cross section 10 mm²

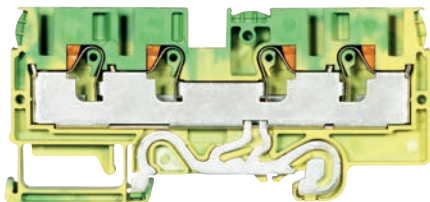

* When cross connector IVB WKFN 6-... is used, the rated voltage must be reduced to 800 V.

Description	Type	Part No.	Std. Pack	
Ground block	green/yellow	WTP 6/10 D2/2 PE	56.206.9155.0	50
General data				
Width / length / height, incl. TS 7.5	8 mm / 94 mm / 44 mm			
Wire strip length	15 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2	pending	pending	pending
Cross section fine-stranded	0.2 – 10 mm ²			
Cross section solid/stranded	0.2 – 10 mm ²			
Cross section, AWG				
Rated current				
Rated voltage	1000 V*			
Rated impulse voltage	8 kV			
Pollution degree	3			
Accessories				
End plate	gray	AP WTP 6/10 D2/2	07.313.5455.0	10
Partition	gray	TW WTP 6/10 Dx/2	07.313.5255.0	10

Accessories for *fasis* WTP...




Accessories	Type	Part No.	Std. Pack
Test plug	ST 2/2,3	Z5.553.2921.0	10
Screwdriver, uninsulated	DIN 5264 B 0,8x4	06.502.4100.0	5

Multi-tier blocks with push-in connection

WTP 2,5/4 E


- Multi-tier block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

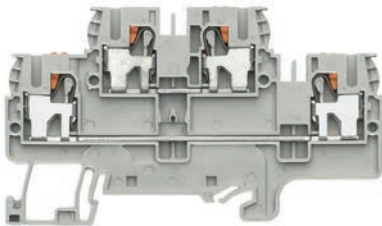

Description	Type	Part No.	Std. Pack	
Multi-tier block	gray	WTP 2,5/4 E	56.203.7055.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-1			pending
Cross section fine-stranded	0.2–4 mm ²			
Cross section solid/stranded	0.2–4 mm ²			
Cross section, AWG		24–12	22–12	
Rated current	24 A	20 A	20 A	
Rated voltage	500 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 E	07.312.7355.0	10
Partition	gray	TWFN 2,5 E	07.312.7455.0	10
Marking tag carrier, 2-fold		BT 5/2	04.243.0855.0	100

WTP 2,5/4 E VB


- Multi-tier block, vertically connected, with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

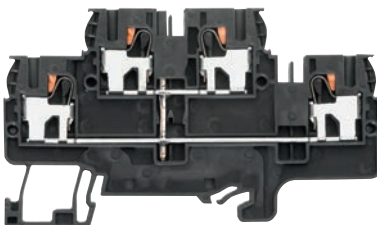

Description	Type	Part No.	Std. Pack	
Multi-tier block	black	WTP 2,5/4 E VB	56.203.6955.1	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			pending
Cross section fine-stranded	0.2–4 mm ²			
Cross section solid/stranded	0.2–4 mm ²			
Cross section, AWG		24–12	22–12	
Rated current	24 A	20 A	20 A	
Rated voltage	500 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 E	07.312.7355.0	10
Partition	gray	TWFN 2,5 E	07.312.7455.0	10
Marking tag carrier, 2-fold		BT 5/2	04.243.0855.0	100


WTP 2,5/4 E PE

- Multi-tier ground block with push-in connection for mounting on TS 35
- Nominal cross section 4 mm²

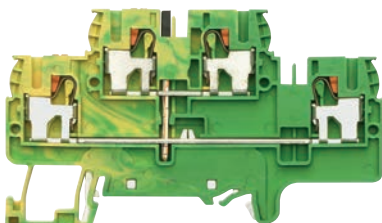

Description	Type	Part No.	Std. Pack	
Multi-tier ground block	green/yellow	WTP 2,5/4 E PE	56.203.8955.0	100
General data				
Width / length / height, incl. TS 7.5	5 mm / 82 mm / 48 mm			
Wire strip length	11 mm			
Approvals				
Technical data	IEC	UL	CSA	Ex
	EN 60 947-7-2			pending
Cross section fine-stranded	0.2–4 mm ²			
Cross section solid/stranded	0.2–4 mm ²			
Cross section, AWG		24–12	22–12	
Rated current				
Rated voltage	500 V	300 V	300 V	
Rated impulse voltage	6 kV			
Pollution degree	3			
Accessories				
End plate	gray	APFN 2,5 E	07.312.7355.0	10


Accessories for *fasis* WTP 2,5/4...

		Accessories			
		Type	Part No.	Std. Pack	
Cross connector, insulated	2-pole	IVB WKF 2,5-2	Z7.280.6227.0	10	
	3-pole	IVB WKF 2,5-3	Z7.280.6327.0	10	
	4-pole	IVB WKF 2,5-4	Z7.280.6427.0	10	
	5-pole	IVB WKF 2,5-5	Z7.280.6527.0	10	
	6-pole	IVB WKF 2,5-6	Z7.280.6627.0	10	
	7-pole	IVB WKF 2,5-7	Z7.280.6727.0	20	
	8-pole	IVB WKF 2,5-8	Z7.280.6827.0	20	
	9-pole	IVB WKF 2,5-9	Z7.280.6927.0	20	
	10-pole	IVB WKF 2,5-10	Z7.280.7027.0	20	
	20-pole	IVB WKF 2,5-20	Z7.280.8027.0	20	
	Wire entry guide	0.13-0.2 mm ²	LELN 2,5/1 WEISS	05.564.3755.0	100
0.25-0.5 mm ²		LELN 2,5/2 GRAU	05.564.3855.0	100	
0.75-1.0 mm ²		LELN 2,5/3 SCHWARZ	05.564.3955.0	100	
Test adapter, modular		PS WKC/F	Z1.299.9753.0	10	
Test plug		ST 2/2,3	Z5.553.2921.0	10	
Screwdriver, uninsulated		DIN 5264 B 0,6x3,5	06.502.4000.0	5	
Screwdriver, uninsulated, MINI		DIN 5264 B 0,6x3,5 M	06.502.5000.0	10	

Multi-tier terminals for installation distribution boards with push-in connection

WKIS 2.5 D

- Installation multi-tier terminal with push-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

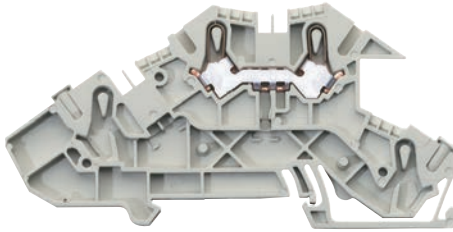


Description	Type	Part No.	Std. Pack
Installation rail terminal blocks	WKIS 2,5 D	56.203.9653.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 100 mm / 51.1 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-4 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG			
Rated current	24 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	Type	Part No.	Std. Pack
	APIS 2,5..	07.313.0253.0	10
Jumper bar	2-pole	IVBWK 2,5 - 2	Z7.280.6227.0
	3-pole	IVBWK 2,5 - 3	Z7.280.6327.0
	10-pole	IVBWK 2,5 - 10	Z7.280.7027.0
	20-pole	IVBWK 2,5 - 20	Z7.280.8027.0
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKIS 2.5 D-D

WKIS 2.5 N-D

- Installation multi-tier terminal with push-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

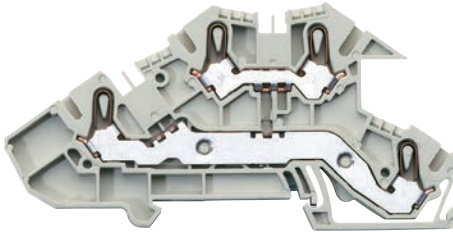


Description	Type	Part No.	Std. Pack
Installation rail terminal blocks	WKIS 2,5 D-D	56.203.9753.0	50
	WKIS 2,5 N-D	56.203.8953.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 100 mm / 51.1 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-4 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG			
Rated current	24 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	Type	Part No.	Std. Pack
	APIS 2,5..	07.313.0253.0	10
Jumper bar	2-pole	IVBWK 2,5 - 2	Z7.280.6227.0
	2-pole	IVBWK 2,5 - 3	Z7.280.6327.0
	10-pole	IVBWK 2,5 - 10	Z7.280.7027.0
	20-pole	IVBWK 2,5 - 20	Z7.280.8027.0
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKIS 2.5 D-D-SL

WKIS 2.5 N-D-SL


- Installation multi-tier terminal with push-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

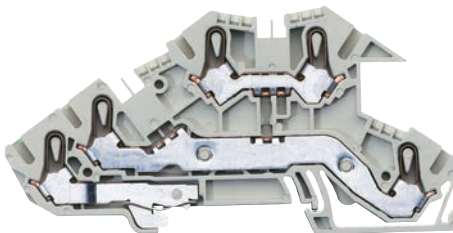

Description	Type	Part No.	Std. Pack
Installation rail terminal blocks	WKIS 2,5 D-D-SL	56.203.9853.0	50
	WKIS 2,5 N-D-SL	56.203.9453.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 100 mm / 51.1 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-4 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG			
Rated current	24 A		
Rated voltage	400 V		
Rated impulse voltage	6 kV		
Pollution degree	3		
Accessories			
End plate	Type	Part No.	Std. Pack
	APIS 2,5..	07.313.0253.0	10
Jumper bar	2-pole	IVBWK 2,5 - 2	Z7.280.6227.0
	3-pole	IVBWK 2,5 - 3	Z7.280.6327.0
	10-pole	IVBWK 2,5 - 10	Z7.280.7027.0
	20-pole	IVBWK 2,5 - 20	Z7.280.8027.0
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKIS 2.5 NT-D-SL


- Installation multi-tier terminal with push-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

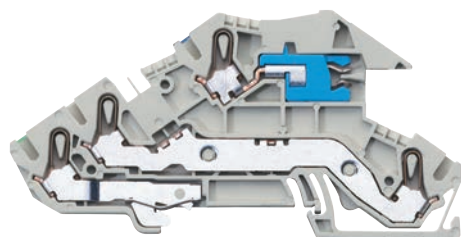

Description	Type	Part No.	Std. Pack
Installation rail terminal blocks	WKIS 2,5 NT-D-SL	56.203.9553.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 100 mm / 51.2 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-4 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG			
Rated current	22 A		
Rated voltage	400 V		
Rated impulse voltage	4 kV		
Pollution degree	3		
Accessories			
End plate	APIS 2,5..	07.313.0253.0	10
Jumper bar	2-pole IVBWK 2,5 - 2	Z7.280.6227.0	10
	3-pole IVBWK 2,5 - 3	Z7.280.6327.0	10
	10-pole IVBWK 2,5 - 10	Z7.280.7027.0	20
	20-pole IVBWK 2,5 - 20	Z7.280.8027.0	20
Busbar	9813 M SN 10X3 1000MM	98.290.1000.0	1

WKIS 2.5 NTM-D-SL

- Installation multi-tier terminal with push-in connection for mounting on TS 35
- Nominal cross section 2.5 mm²

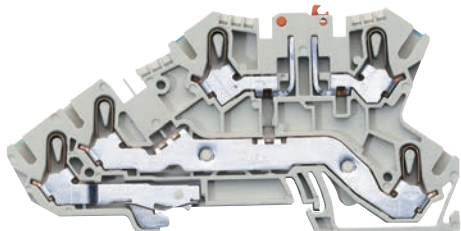


Description	Type	Art.No.	Std. Pack
Installation rail terminal blocks	WKIS 2,5 NTM-D-SL	56.203.8653.0	50
General data			
Width / length / height, incl. TS 7.5	5 mm / 100 mm / 50.7 mm		
Wire strip length	11 mm		
Approvals			
Technical data	IEC	UL	CSA
	EN 60 947-7-1		
Cross section fine-stranded	0.14-4 mm ²		
Cross section solid/stranded	0.14-4 mm ²		
Cross-section, AWG			
Rated current	20 A		
Rated voltage	400 V		
Rated impulse voltage	4 kV		
Pollution degree	3		
Accessories			
End plate	APIS 2,5 NTM-D-SL	07.313.0353.0	10
Jumper bar	2-pole IVBWK 2,5 - 2	Z7.280.6227.0	10
	3-pole IVBWK 2,5 - 3	Z7.280.6327.0	10
	10-pole IVBWK 2,5 - 10	Z7.280.7027.0	20
	20-pole IVBWK 2,5 - 20	Z7.280.8027.0	20

Accessories and Service

To complement our products, we offer a comprehensive portfolio of accessories and services for terminal blocks.

Wieland offers a variety of product-specific accessories for its terminal blocks, for example covers and isolating plates as well as assembly materials such as mounting rails or tools for working with our products.

Marking solutions such as **wieplot** and **wiemarc** for DIN rail terminal blocks and other components in the control cabinet, the planning software **wieplan** for design of rail assemblies, and our value-add service for rail assemblies, all make working with Wieland DIN rail terminal blocks effortless, and achieve a true added value.

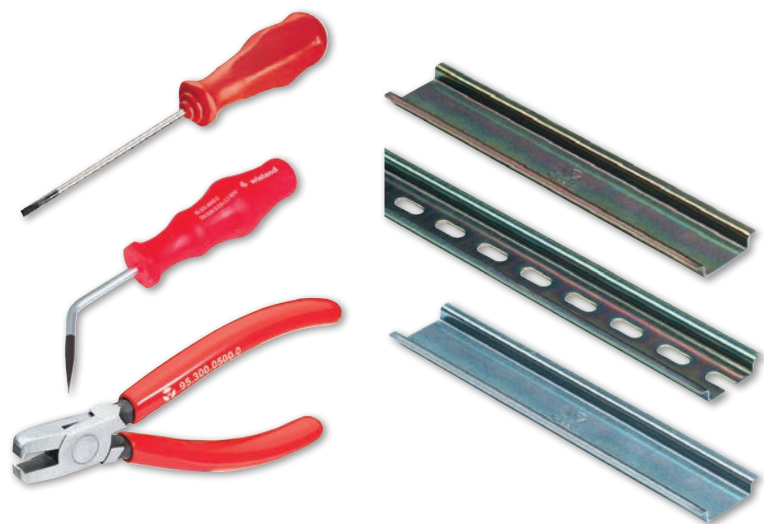

Shielded cable terminal blocks, type WST – for trouble-free operation



High interference immunity is an important topic in industrial and process technology. It is one of the key factors affecting the availability of plants. For our **selos** and **fasis** terminal block series, we offer WST, a system that enables the cable shield to be connected to the housing earth in a simple, practical manner.


Features

- Simple mounting - also if upgraded, service and maintenance
- Broad range – up to 32 mm cable diameter
- Top-quality, maintenance-free technology
- Various mounting options

Top-quality technology

- Vibration-proof spring-type technology
- Large-area and low impedance connection
- Highly corrosion resistance
- Durable clamping body from hardened steel

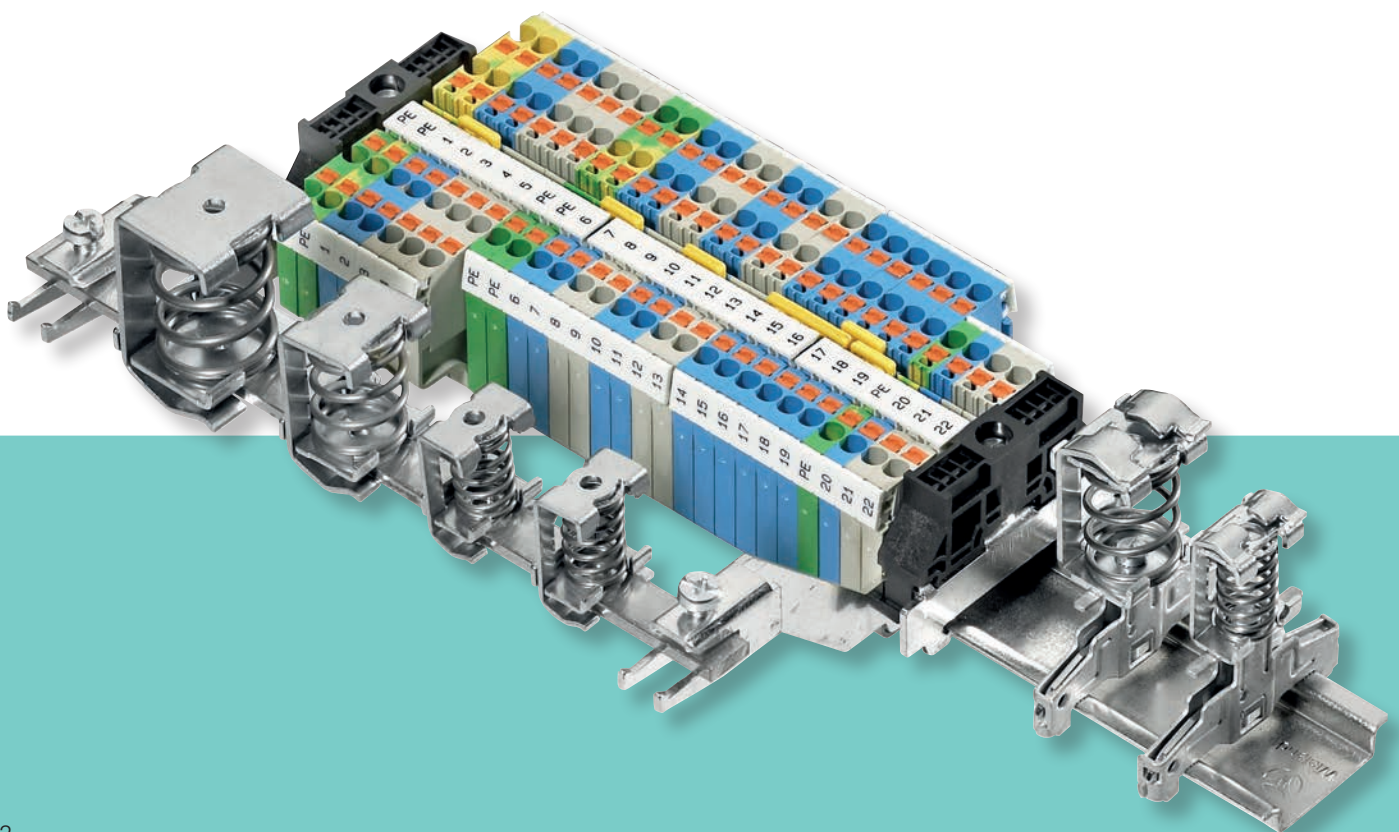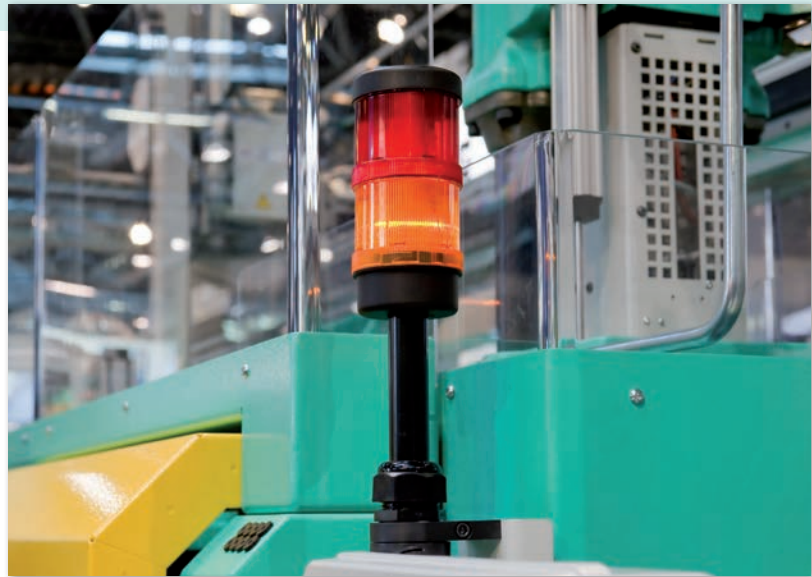

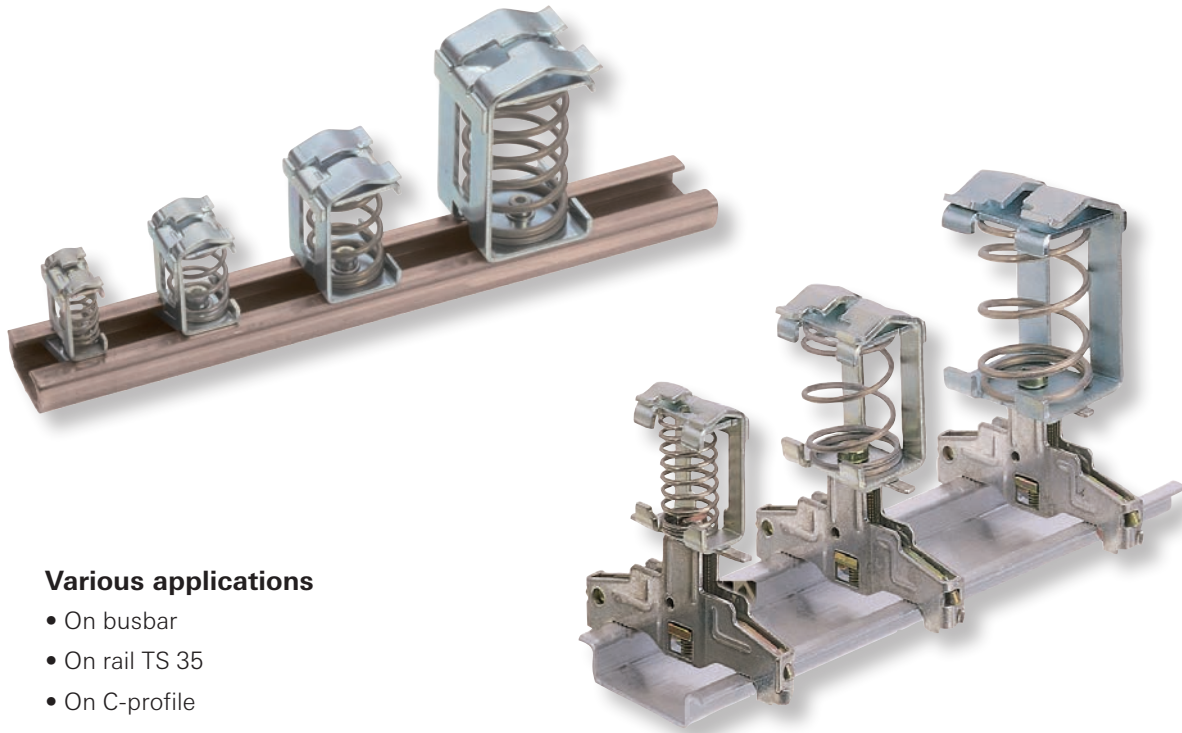

Various applications

- On busbar
- On rail TS 35
- On C-profile
- With screw for mounting plates



Various accessories


- Busbar support for TS 35
- Busbar support for insulated mounting
- Connection terminals



Shielded cable terminals

Shielded cable terminals *fasis* WST ...

- for mounting on busbar 10 x 3 mm

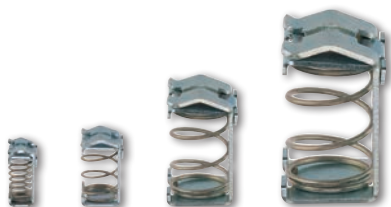


Description	Type	Part No.	Std. Pack
Shielded cable terminals <i>fasis</i>			
8 mm	WST 8	Z2.803.3010.0	10
13.5 mm	WST 13,5	Z2.803.3110.0	10
20 mm	WST 20	Z2.803.3210.0	10
32 mm	WST 32	Z2.803.3310.0	10

Technical data	WST 8	WST 13.5	WST 20	WST 32
Width / length / height [mm]	13 x 18 x 26	19 x 22 x 32	24 x 27 x 40	36 x 32 x 64
Connectible cable diameter	3 - 8 mm	4 - 13.5 mm	10 - 20 mm	15 - 32 mm

Shielded cable terminals *fasis* WST C

- for mounting on C-profile

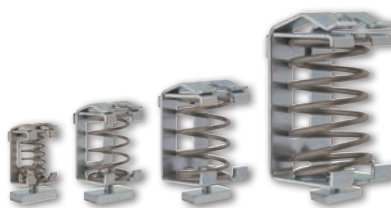


Description	Type	Part No.	Std. Pack
Shielded cable terminals <i>fasis</i>			
8 mm	WST 8 / C	Z2.803.4010.0	10
13.5 mm	WST 13,5 / C	Z2.803.4110.0	10
20 mm	WST 20 / C	Z2.803.4210.0	10
32 mm	WST 32 / C	Z2.803.4310.0	10

Technical data	WST 8 / C	WST 13.5 / C	WST 20 / C	WST 32 / C
Width / length / height [mm]	13 x 18 x 26	19 x 22 x 32	24 x 27 x 40	36 x 32 x 64
Connectible cable diameter	3 - 8 mm	4 - 13.5 mm	10 - 20 mm	15 - 32 mm
Mounting screw	M 4	M 4	M 4	M 4

Accessories				
Mounting rail, galvanized steel	L = 2 m		98.400.0000.0	1
Mounting feet	light gray		Z1.980.0040.0	10
Ground terminal for mounting rail		9700/10E/1	Z2.302.1321.0	10

Shielded cable terminals *fasis* WST D

- for mounting on mounting plate

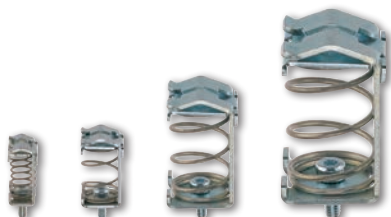


Description	Type	Part No.	Std. Pack
Shielded cable terminals <i>fasis</i>			
8 mm	WST 8 / D	Z2.803.5010.0	10
13.5 mm	WST 13,5 / D	Z2.803.5110.0	10
20 mm	WST 20 / D	Z2.803.5210.0	10
32 mm	WST 32 / D	Z2.803.5310.0	10

Technical data	WST 8 / D	WST 13.5 / D	WST 20 / D	WST 32 / D
Width / length / height [mm]	13 x 18 x 26	19 x 22 x 32	24 x 27 x 40	36 x 32 x 64
Connectible cable diameter	3 - 8 mm	4 - 13.5 mm	10 - 20 mm	15 - 32 mm
Mounting screw	M 4	M 4	M 4	M 4

Shielded cable terminals *fasis* WST .../T35


- for mounting on TS 35 mounting rail

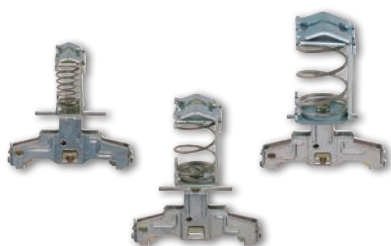


Description	Type	Part No.	Std. Pack
Shielded cable terminals <i>fasis</i>			
8 mm	WST 8 / TS 35	Z2.803.6010.0	10
13.5 mm	WST 13,5 / TS 35	Z2.803.6110.0	10
20 mm	WST 20 / TS 35	Z2.803.6210.0	10

Technical data	WST 8	WST 13.5	WST 20
Width / length / height [mm]	13 x 52 x 54	19 x 52 x 60	24 x 52 x 68
Connectible cable diameter	3 - 8 mm	4 - 13.5 mm	10 - 20 mm

Busbar support & accessories

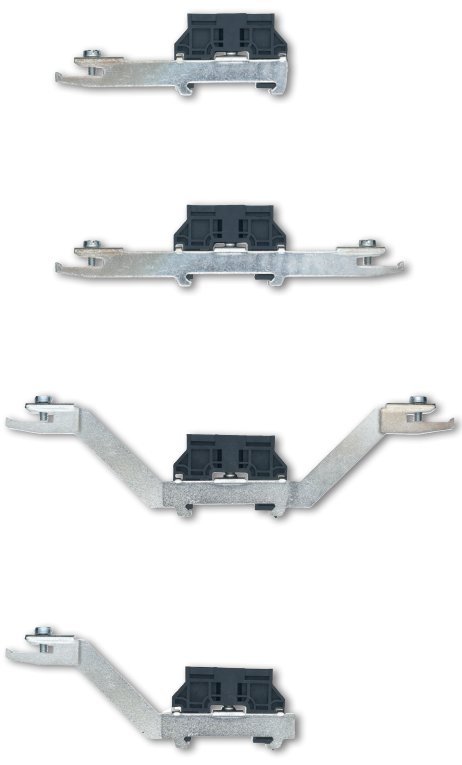
Busbar support	Description	Type	Part No.	Std. Pack
	Busbar support			
	Busbar support (one-side), tin-plated steel	WE SH 1/35	Z5.515.3310.0	20
	Busbar support (two-sided), tin-plated steel	WE SH 2/35	Z5.515.3410.0	20
	Busbar support (two-sided), tin-plated steel	WE SH 3/35	Z5.519.0310.0	25
	Busbar support (one-side), tin-plated steel	WE SH 4/35	Z5.519.0410.0	25
	Busbar support plastic, black	WST H 10x3	Z1.980.0253.0	20

Accessories	Description	Type	Part No.	Std. Pack
	Accessories			
	Ground Terminal, bright	WAK 35/2	30.494.4121.0	50
	Ground Terminal, black	WAK 35/2 SW	30.494.4021.1	50
	Busbar, Cu tin-plated copper	L = 1 m 9813M SN 10x3	98.290.1000.0	20


Mounting rails

Mounting rail 35x7,5 according to DIN EN 60715

- Length 2 m

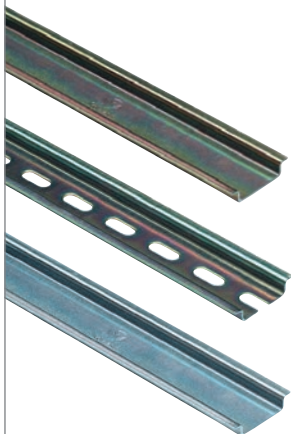


Description	Type	Part No.	Std. Pack
Steel, galv. zinc-plated and dichromated unslotted	35 x 27 x 7,5 EN 60715 2000mm	98.300.0000.0	1
Steel, galv. zinc-plated and dichromated slotted	35 x 27 x 7,5 EN 60715 2000mm	98.300.1000.0	1
Steel, unplated unslotted	35 x 27 x 7,5 EN 60715 2000mm	98.300.0010.0	1

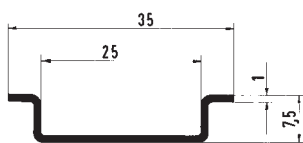


Mounting rail 35x15 according to DIN EN 60715

- Length 1 m/2 m

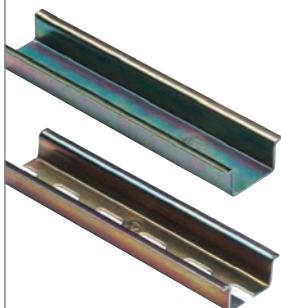


Description	Type	Part No.	Std. Pack
Steel, galv. zinc-plated and dichromated unslotted	35 x 27 x 15 EN 60715 2000mm	98.370.0000.0	1
Steel, galv. zinc-plated and dichromated slotted	35 x 27 x 15 EN 60715 2000mm	98.370.1000.0	1
Steel, galv. zinc-plated and dichromated slotted	35 x 27 x 15 EN 60715 1000mm	98.375.1000.0	10
Steel, stainless steel slotted	35 x 27 x 15 EN 60715 2000mm	98.370.1001.0	1

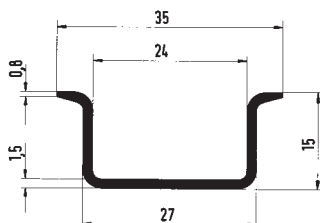


Mounting rail 35x15 according to DIN EN 60715

- Length 2 m

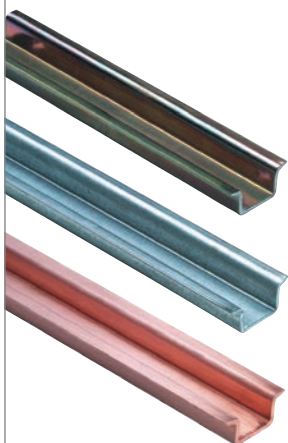


Description	Type	Part No.	Std. Pack
Steel, galv. zinc-plated and dichromated unslotted	35 x 24 x 15 EN 60715 2000mm	98.360.0000.0	1
Steel, hot-galvanized unslotted	35 x 24 x 15 EN 60715 ZN 2000mm	98.360.0004.0	1
E-copper unslotted	35 x 24 x 15 EN 60715 CU 2000mm	98.380.0000.0	10

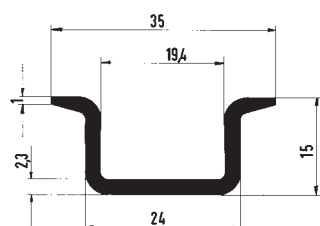


Mounting rail 15x5,5 according to DIN EN 60715

• Length 1 m/2 m

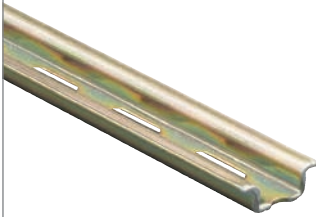


Description	Type	Part No.	Std. Pack	
Steel, galv. zinc-plated and dichromated	slotted	9021 / 15 x 5,5 EN 60715 2000mm	98.090.0015.0	10
Steel, galv. zinc-plated and dichromated	slotted	9021 / 15 x 5,5 EN 60715 1000mm	98.090.0000.0	1




Mounting rail 15x5,5 according to DIN EN 60715


• Length 2 m

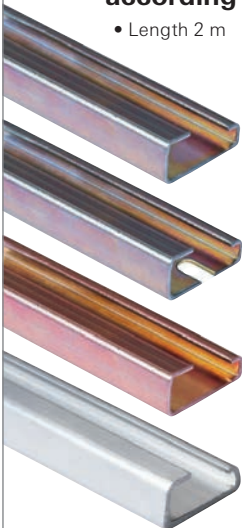

Description	Type	Part No.	Std. Pack	
Steel, galv. zinc-plated and dichromated	unslotted	9006 EN 60715 G-32 2000mm	98.190.0000.0	1
Steel, galv. zinc-plated and dichromated	slotted	9006 EN 60715 G-32 2000mm	98.190.1000.0	1
E-copper	unslotted	9006 E-CU 2000mm	98.220.0000.0	10
Aluminium	unslotted	9006 AL 2000mm	98.210.0000.0	1

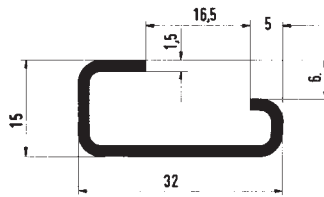


Accessories

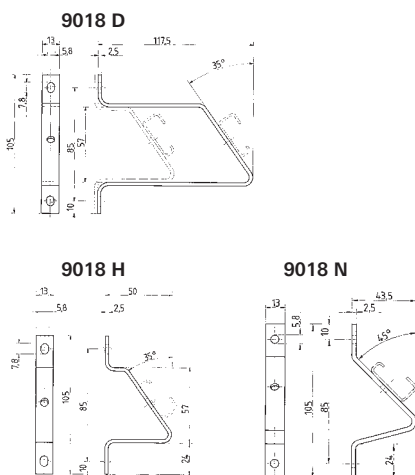

Accessories	Type	Part No.	Std. Pack
Angled support bracket with mounting material	9018 D	Z5.516.2511.0	50
Angled support bracket with mounting material	9018 H	Z5.516.2711.0	50
Angled support bracket with mounting material	9018 N	Z5.516.2811.0	50


End clamps

End clamp for TS 35 snap-on mounting

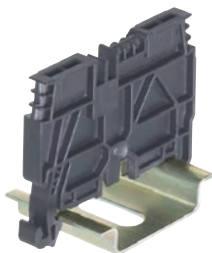

Description	Type	Part No.	Std. Pack
End clamp TS 35 5 mm wide	WEF 2 /35	Z5.523.9453.0	100

End clamp for TS 35 snap-on mounting

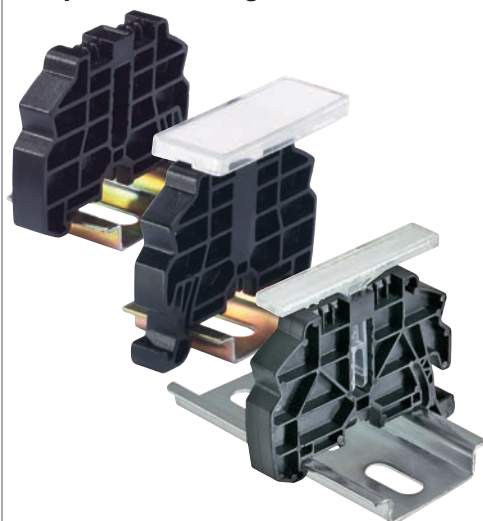

Description	Type	Part No.	Std. Pack
End clamp TS 35 8mm wide	WEF 1 /35	Z5.523.9353.0	100
End clamp TS 35 17,5mm wide with marking facilities	WEF 1 BS /35	69.920.1053.0	100
End clamp TS 35 8mm wide with marking facilities	WEF 1 BSS /35	69.920.1253.0	100
Accessories			
Marking tag for WEF 1 /35 wide	BS/R	Z4.243.8453.0	100
Marking cardboard in perforated sheets 100 tags/sh.		04.019.0289.0	10
Marking tag for WEF 1 /35 small		04.243.8550.0	10
Marking cardboard in perforated sheets small		04.019.1189.0	10


End clamp for TS 35 screw mounting



Description	Type	Part No.	Std. Pack
End clamp TS 35 8mm wide	9708/2 S 35	Z5.522.8553.0	100
End clamp TS 35 17,5mm wide with marking facilities	9708/2 BS 35	69.920.0553.0	100
Accessories			
Marking cardboard in perforated sheets 100 tags/sh.		04.019.0289.0	10

End brackets / busbar support

End clamp with with U-foot screw mounting

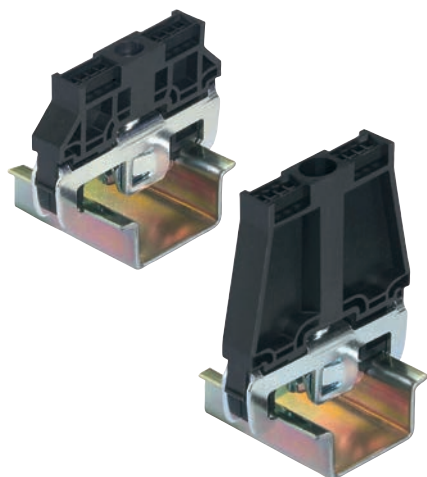

Description	Type	Part No.	Std. Pack
End clamp with U-foot 10 mm wide	WE 1 /U	Z5.523.5753.0	100
End clamp with U-foot with marking facilities 17,5 mm wide	WE 1 BS /U	69.920.0753.0	100
End clamp with U-foot 10 mm wide	WE 2 /U	Z5.523.5653.0	100
End clamp with U-foot with marking facilities 17,5 mm wide	WE 2 BS /U	69.920.0653.0	100


Accessories		Type	Part No.	Std. Pack
Marking cardboard in perforated sheets	100 tags/sh.		04.019.0289.0	10

End clamp for TS 15 screw mounting



Description	Type	Part No.	Std. Pack
End clamp, plastic 7,5 mm wide	9208 S 15	Z5.522.7553.0	100
End clamp, steel 5 mm wide	9222 S 15	Z5.522.5010.0	100

Busbar support for N-busbar fastening, screwless

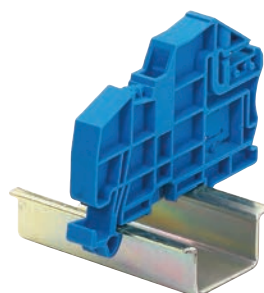

Description	Type	Part No.	Std. Pack
End bracket/busbar support 8 mm wide	WKIF SH/E/35 *	Z1.108.8453.0	100

Accessories		Type	Part No.	Std. Pack
Marking tag for WKIF SH/E/35	Wide	BS/R	Z4.243.8453.0	100
Label carton in perf. sheets	Wide		04.019.0289.0	10
Marking tag	Narrow		04.243.8550.0	10
Label carton in perf. sheets	Narrow		04.019.1189.0	10

* Distance between WKIF SH and WKIF SH max. 200 mm

Busbar support 2 mm wide	WKIF SH/35	01.108.7653.0	10
Fits installation terminals WKIF and WKIS			

wieprint

The printer for all current marking systems

Individual marking – at Wieland, that means **wieprint**, is a high performance marking system with which you can professionally create labels, from individual marking tags to serial marking, for your strip terminals. But **wieprint** offers still more! In addition to marking tags for series terminals, you can also print stickers, labels, or cable markings for all applications in the control cabinet.






Extremely versatile use



Prints marking tags efficiently and individually



Simple operation

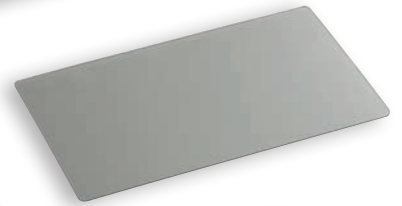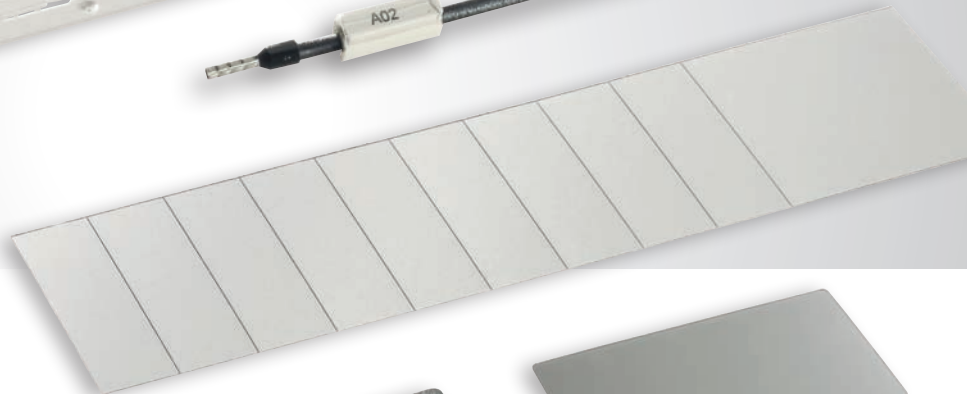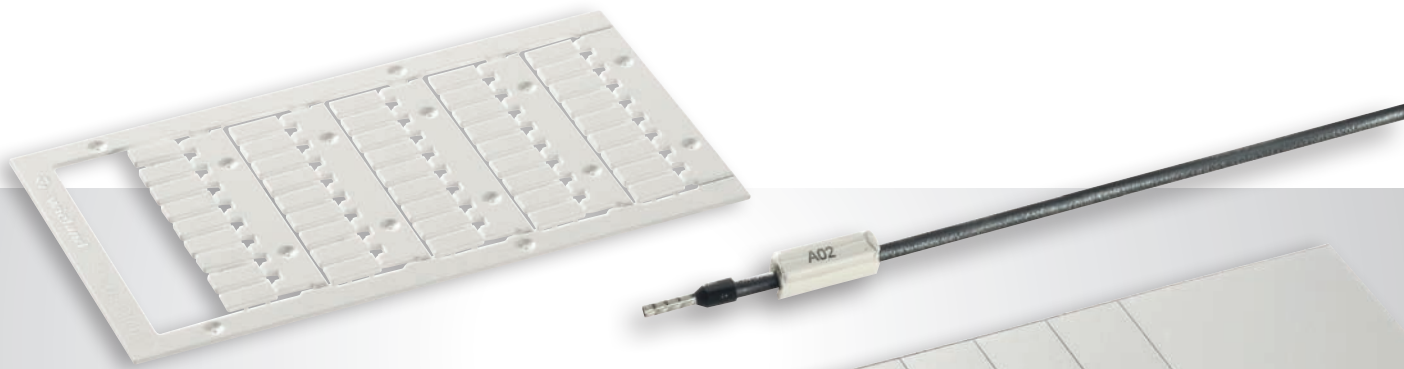

Extremely versatile use

- For all Wieland series terminals
- For many other brands
- For identifying cables, switching elements, pushbuttons and many other control cabinet components

Simple operation

- High performance marking software
- Operation via software interface or directly on device
- Integrated LCD display
- Easy to maintain – just change the printing ribbons

Prints marking tags efficiently and individually

- Thermal transfer print for high quality, durable marking
- High print speed – up to 8500 tags/hour
- Automatic operation, including magazine, possible



Thermal transfer printer

Thermal transfer printer *wieprint*



Description	Typ	Part No.	Std. Pack
Complete package	wieprint	95.503.0000.0	1

Scope of delivery: Thermal transfer printer *wieprint*, 1 x power supply cable, 1 x USB 2.0 cable, 1 x marking software (CD), 1 x printer ribbon black, 1 x cleaning ribbon, 1 x holding plate semi-automatic, 1 x holding plate automatic mode, 1 x magazine for cable marking, 1 x support base

Description: *wieprint* the printer system for marking DIN rail terminal blocks and other marking tags in the control cabinet.

Technical data	
Printing method	Thermo transfer
Operating modes	Automatic, semi-automatic, manual feed
Resolution	300 dpi
Dimensions	423 x 240 x 208 mm
Weight	9.5 kg
Fonts	Windows True Type
Graphics formats	.gif, .jpg, .jpeg, .bmp, .wmf
Printing speed	up to 60 mm/s
Interface	USB 2.0
Voltage	100V to 240V AC, 50/60Hz
Power, max.	135 W

Accessories for thermal transfer printers *wieprint*



Description	Typ	Part No.	Std. Pack
Accessories for thermal transfer printers <i>wieprint</i>			
Printer ribbon black (l = 130 m)	wieprint FB sw	95.503.0010.1	3
Printer ribbon red (l = 130 m)	wieprint FB rt	95.503.0010.5	3
Cleaning ribbon (l = 8 m)	wieprint RB	95.503.0012.0	1
Cleaning roll	wieprint RR	95.503.0013.0	1
Holding plate wire/cable marking, directly printable	wieprint AP2	95.503.0014.0	1

Marking of DIN rail terminal blocks

Marking tags for DIN rail terminal blocks



Description	Typ	Part No.	Std. Pack	
Marking tags for DIN rail terminal blocks, unmarked				
Size 5.0 x 8.5 mm	WMP 5 SI2KTB5085DW	04.405.0056.0	12	
Size 6.0 x 8.5 mm	WMP 6 SI2KTB6085DW	04.406.0056.0	12	
Size 6.0 x 10 mm	WMP 6 SI2KTB6010DW	04.406.0156.0	12	
Size 8.0 x 8.5 mm	WMP 8 SI2KTB8085DW	04.408.0056.0	12	
Technical data				
Width mm	5.0 x 8.5 mm	6.0 x 8.5 mm	6.0 x 10 mm	8.0 x 8.5 mm
Number of tags / plate	5 and 10	6 and 12	6 and 12	8 and 16
Packing unit plates / box	45	45	45	25
	12	12	12	12

Marking strips for DIN rail terminal blocks



Description	Typ	Part No.	Std. Pack
Marking strips for DIN rail terminal blocks			
for series WKF 1,5	WMS SI2K06130W	04.400.0081.2	20
for series WT and WTP,...	WMS SI2K11130W	04.400.0181.2	20
Technical data			
Number of strips / plate	3		
Packing unit plates / box	20		

Marking tags for DIN rail terminal blocks Weidmüller / Wago



Description	Typ	Part No.	Std. Pack
Marking tags for DIN rail terminal blocks, unmarked, Weidmüller / Wago			
Size 5 x 10 mm	WMP SI2KTB5010LWK	04.405.1056.0	12
Technical data			
Number of tags / plate	45		
Packing unit plates / box	12		

Marking tags for DIN rail terminal blocks Phoenix Contact



Description	Typ	Part No.	Std. Pack
Marking tags for DIN rail terminal blocks, unmarked, Phoenix Contact			
Size 5 x 9 mm	WMP SI2KTB5209EW	04.405.1156.0	12
Size 5 x 10 mm	WMP SI2KTB5210CW	04.405.1256.0	12
Technical data			
Number of tags / plate	45		
Packing unit plates / box	12		

Marking for wires

Marking sleeves



Description	Typ	Part No.	Std. Pack
Marking sleeves, push-fit			
Wire diameters 1.5 – 2.5 mm	WMS 201/15	04.410.0181.0	1000
Wire diameters 2 – 4 mm	WMS 202/15	04.410.0281.0	1000
Wire diameters 4 – 7 mm	WMS 203/15	04.410.0381.0	500
Wire diameters 6 – 10 mm	WMS 204/15	04.410.0481.0	500
Wire diameters 8 – 14 mm	WMS 205/15	04.410.0581.0	200
Marking sleeves, snap-on			
Wire diameters 2 – 3.5 mm	WMS 301/15	04.410.0681.0	1000
Wire diameters 2.8 – 5 mm	WMS 302/15	04.410.0781.0	1000
Wire diameters 5 – 8 mm	WMS 303/15	04.410.0881.0	500
Wire diameters 8 – 10 mm	WMS 304/15	04.410.0981.0	500
Technical data			
Material	PVC		
Color	transparent		
Length mm	15		

Marking tags for wire markers, unmarked



Description	Typ	Part No.	Std. Pack
Marking tags for wire markers, unmarked			
Size 15 x 4 mm, color white	WMS Si2K02W/15N	04.410.1081.2	32
Size 15 x 4 mm, color yellow	WMS Si2K02Y/15N	04.410.1081.8	32
Technical data			
Material	PC / ABS		
Number of tags / plate	24		
Packing unit plates / box	32		

Wire markers



Description	Typ	Part No.	Std. Pack
Wire markers, directly printable			
Color white	WMS Si2KTM02W/10	04.410.1281.2	22
Technical data			
Material	PC		
Length mm	10		
Number of tags / plate	33		
Packing unit plates / box	22		

Marking for cables

Cable marking	Description	Typ	Part No.	Std. Pack
	Cable marking, unmarked			
Size: 15 x 80 mm, directly printable, color yellow				
		WMS SI2KCT1580Y	04.410.1481.8	15
Technical data				
Material		PVC		
Number of tags / plate		12		
Packing unit plates / box		15		




Marking sleeves	Description	Typ	Part No.	Std. Pack
	Marking sleeves			
Size 7 x 46, color transparent				
		WMS SIT0003X050	04.410.1581.0	224
Size 15 x 67, color transparent				
		WMS SIT0004X070	04.410.1781.0	96
Size 9 x 20 mm, color transparent				
		WMS SI1001	04.410.1981.0	240
Technical data				
Material		PVC		




Marking tags	Marking tags for marking sleeves			
	Size 7 x 46, color white			
		WMS SI2K0746W	04.410.1681.2	40
Size 15 x 67, color white				
		WMS SI2K1567W	04.410.1881.2	25
Size 9 x 20 mm, color white				
		WMS SI2K1001W	04.410.2081.2	40
Size 9 x 20 mm, color yellow				
		WMS SI2K1001Y	04.410.2081.8	40
Technical data				
		7 x 46 mm	15 x 67 mm	9 x 20 mm
Material		PVC		
Number of tags / plate		28	4	60
Packing unit plates / box		40	25	40






Marking for devices

Marking tags	Description	Typ	Part No.	Std. Pack	
	Marking tags, blank				
	Size 7 x 20 mm, color white	WMS SI2K40720W	04.420.0181.2	25	
	Size 7 x 20 mm, color yellow	WMS SI2K40720Y	04.420.0181.8	25	
	Size 8 x 17 mm, color white	WMS SI2K40817W	04.420.0381.2	25	
	Size 9 x 20 mm, color white	WMS SI2K40920W	04.420.0481.2	25	
	Size 9 x 35 mm, color white	WMS SI2K40935W	04.420.0581.2	25	
	Size 10 x 25 mm, color white	WMS SI2K41025W	04.420.0681.2	20	
	Technical data				
	7 x 20 mm	8 x 17 mm	9 x 20 mm	9 x 35 mm	10 x 25 mm
Material	PVC				
Number of tags / plate	70	77	60	36	30
Packing unit plates / box	25	25	25	25	20

Marking adhesive label	Description	Typ	Part No.	Std. Pack
	Marking adhesive label, unmarked			
	Size 6 x 15 mm, color white	WMS SI2KFX0615W	04.420.1581.2	52
	Size 6 x 15 mm, color yellow	WMS SI2KFX0615Y	04.420.1581.8	52
	Size 7 x 20 mm, color white	WMS SI2KFX0720W	04.420.1681.2	50
	Size 7 x 20 mm, color yellow	WMS SI2KFX0720Y	04.420.1681.8	50
	Size 9 x 15 mm, color white	WMS SI2KFX0915W	04.420.1781.2	45
	Size 9 x 15 mm, color yellow	WMS SI2KFX0915Y	04.420.1781.8	45
	Size 22 x 22 mm, color white	WMS SI2KFX2222W	04.420.1881.2	50
	Technical data			
	6 x 15 mm	7 x 20 mm	9 x 15 mm	22 x 22 mm
Material	Vinyl			
Number of tags / plate	117	70	78	16
Packing unit plates / box	52	50	45	50


Marking for the control cabinet and for buttons

<p>Type plates for the control cabinet</p> 	<table border="1"> <thead> <tr> <th>Description</th> <th>Typ</th> <th>Part No.</th> <th>Std. Pack</th> </tr> </thead> <tbody> <tr> <td colspan="4">Type plates, PVC, unmarked</td> </tr> <tr> <td>Size 30 x 70 mm, color white</td> <td>WMS SI2K43070W</td> <td>04.420.0781.2</td> <td>20</td> </tr> <tr> <td>Size 30 x 70 mm, color metallic</td> <td>WMS SI2K43070M</td> <td>04.420.0781.0</td> <td>20</td> </tr> <tr> <td>Size 30 x 70 mm, color yellow</td> <td>WMS SI2K43070Y</td> <td>04.420.0781.8</td> <td>20</td> </tr> <tr> <td>Size 60 x 100 mm, color white</td> <td>WMS SI2K460100W</td> <td>04.420.1081.2</td> <td>15</td> </tr> <tr> <td>Size 60 x 100 mm, color metallic</td> <td>WMS SI2K460100M</td> <td>04.420.1081.0</td> <td>15</td> </tr> <tr> <td>Size 60 x 100 mm, color yellow</td> <td>WMS SI2K460100Y</td> <td>04.420.1081.8</td> <td>15</td> </tr> <tr> <td colspan="4">Technical data</td> </tr> <tr> <td>Material</td> <td colspan="3">PVC</td> </tr> <tr> <td>Number of tags / plate</td> <td colspan="3">1</td> </tr> </tbody> </table>	Description	Typ	Part No.	Std. Pack	Type plates, PVC, unmarked				Size 30 x 70 mm, color white	WMS SI2K43070W	04.420.0781.2	20	Size 30 x 70 mm, color metallic	WMS SI2K43070M	04.420.0781.0	20	Size 30 x 70 mm, color yellow	WMS SI2K43070Y	04.420.0781.8	20	Size 60 x 100 mm, color white	WMS SI2K460100W	04.420.1081.2	15	Size 60 x 100 mm, color metallic	WMS SI2K460100M	04.420.1081.0	15	Size 60 x 100 mm, color yellow	WMS SI2K460100Y	04.420.1081.8	15	Technical data				Material	PVC			Number of tags / plate	1		
Description	Typ	Part No.	Std. Pack																																										
Type plates, PVC, unmarked																																													
Size 30 x 70 mm, color white	WMS SI2K43070W	04.420.0781.2	20																																										
Size 30 x 70 mm, color metallic	WMS SI2K43070M	04.420.0781.0	20																																										
Size 30 x 70 mm, color yellow	WMS SI2K43070Y	04.420.0781.8	20																																										
Size 60 x 100 mm, color white	WMS SI2K460100W	04.420.1081.2	15																																										
Size 60 x 100 mm, color metallic	WMS SI2K460100M	04.420.1081.0	15																																										
Size 60 x 100 mm, color yellow	WMS SI2K460100Y	04.420.1081.8	15																																										
Technical data																																													
Material	PVC																																												
Number of tags / plate	1																																												
<p>Marking for type plates</p> <ul style="list-style-type: none"> holder for marking tags marking tag 	<table border="1"> <thead> <tr> <th>Description</th> <th>Typ</th> <th>Part No.</th> <th>Std. Pack</th> </tr> </thead> <tbody> <tr> <td colspan="4">Marking for type plates</td> </tr> <tr> <td>Holder for marking tags</td> <td>WMS SIT0B05</td> <td>04.420.1381.0</td> <td>192</td> </tr> <tr> <td>Marking tag size 15 x 27 mm</td> <td>WMS SI2K1527W</td> <td>04.420.1481.2</td> <td>11</td> </tr> <tr> <td colspan="4">Technical data</td> </tr> <tr> <td>Material</td> <td colspan="3">PVC</td> </tr> <tr> <td>Number of tags / plate</td> <td colspan="3">18</td> </tr> <tr> <td>Packing unit plates / box</td> <td colspan="3">11</td> </tr> </tbody> </table>	Description	Typ	Part No.	Std. Pack	Marking for type plates				Holder for marking tags	WMS SIT0B05	04.420.1381.0	192	Marking tag size 15 x 27 mm	WMS SI2K1527W	04.420.1481.2	11	Technical data				Material	PVC			Number of tags / plate	18			Packing unit plates / box	11														
Description	Typ	Part No.	Std. Pack																																										
Marking for type plates																																													
Holder for marking tags	WMS SIT0B05	04.420.1381.0	192																																										
Marking tag size 15 x 27 mm	WMS SI2K1527W	04.420.1481.2	11																																										
Technical data																																													
Material	PVC																																												
Number of tags / plate	18																																												
Packing unit plates / box	11																																												
<p>Marking tag</p> <p>for the button</p> <ul style="list-style-type: none"> adhesive label 	<table border="1"> <thead> <tr> <th>Description</th> <th>Typ</th> <th>Part No.</th> <th>Std. Pack</th> </tr> </thead> <tbody> <tr> <td colspan="4">Marking tag for the button</td> </tr> <tr> <td>adhesive label size 15 x 27 mm, color white</td> <td>WMS SI2K41527W</td> <td>04.420.1281.2</td> <td>11</td> </tr> <tr> <td>adhesive label size 15 x 27 mm, color metallic</td> <td>WMS SI2K41527M</td> <td>04.420.1281.0</td> <td>11</td> </tr> <tr> <td colspan="4">Technical data</td> </tr> <tr> <td>Material</td> <td colspan="3">PVC / ACR</td> </tr> <tr> <td>Number of tags / plate</td> <td colspan="3">18</td> </tr> <tr> <td>Packing unit plates / box</td> <td colspan="3">11</td> </tr> </tbody> </table>	Description	Typ	Part No.	Std. Pack	Marking tag for the button				adhesive label size 15 x 27 mm, color white	WMS SI2K41527W	04.420.1281.2	11	adhesive label size 15 x 27 mm, color metallic	WMS SI2K41527M	04.420.1281.0	11	Technical data				Material	PVC / ACR			Number of tags / plate	18			Packing unit plates / box	11														
Description	Typ	Part No.	Std. Pack																																										
Marking tag for the button																																													
adhesive label size 15 x 27 mm, color white	WMS SI2K41527W	04.420.1281.2	11																																										
adhesive label size 15 x 27 mm, color metallic	WMS SI2K41527M	04.420.1281.0	11																																										
Technical data																																													
Material	PVC / ACR																																												
Number of tags / plate	18																																												
Packing unit plates / box	11																																												

wieplot

The powerful marking system for your DIN rail terminals

Together with the **wieplot** plotter you have a powerful marking system that enables you to work professionally from the individual marking tag to series marking of your terminal block assemblies. You feel confident with the system due to its easy handling and visual representation of your marking, even when you use it for the first time. But **wieplot** offers even more! In addition to the marking tags for DIN rail terminal blocks you can also print self-adhesive tags and labels or cable markings. A slight modification can even make your plotter a powerful engraving system.

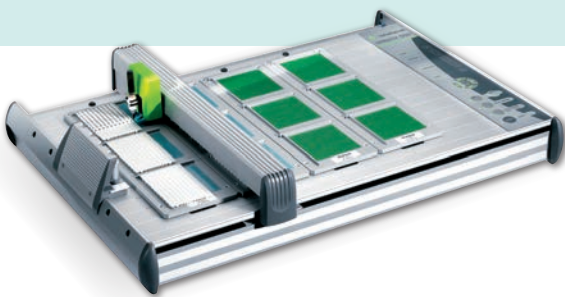

Universal marking with **wieplot**

- Marks all common marking systems available for DIN rail terminal blocks
- Different marking tags can be marked individually in one single work step
- Marking of labels, self-adhesive tags and cables is possible


Durable and safe marking with engraving system **wieplot**

- Easy modification to **wieplot** to make it an engraving system
- Engraving of multi-layer plastic boards
- Clean and dust-proof operation due to integrated vacuum device
- Create individual layouts

appropriate software


Easy and quick to configure

- Simple and intuitive user interface
- Direct graphical display of the marking tags including plausibility check
- Customized layouts can be created individually
- Data import from CAD, Excel, text or **wieplan**

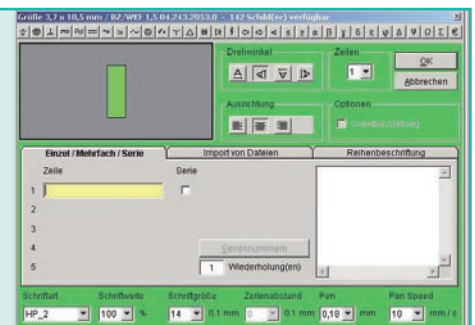

The plotter system *wieplot* and *wieplot* BASIC

Plotter system

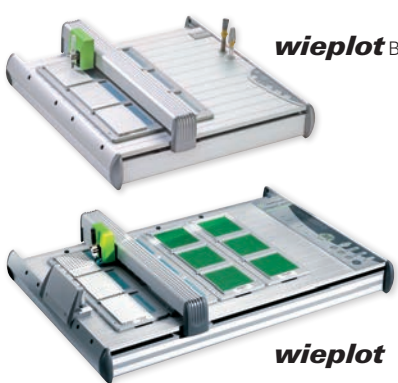

wieplot BASIC


wieplot

Description	Type	Part No.	Std. Pack
Complete package	wieplot BASIC	95.502.0607.0	1
Complete package	wieplot	95.502.0604.0	1

Contents: Plotter *wieplot*, data cable and manual, 4 receptacles (*wieplot*) / 2 receptacles (*wieplot* BASIC) for WSB (Wieland standard marking system), accessories kit, software

Technical data	
Resolution	0.01 mm
Accuracy	+/- 0.05 mm
Power supply unit	50/60 Hz, 100 - 240 V
Output voltage	24 V DC 1.4 A
Current input	app. 0.3 A at 220 V
Approval	UL-UL1950, CSA 950, VDE EN 60950
Radio interf. suppr.	FCC class B, FCC sect. 15 and VDE class B
Dimension / Weight – <i>wieplot</i> BASIC	440 mm x 440 mm x 125 mm / 6 kg
Dimension / Weight – <i>wieplot</i>	660 mm x 440 mm x 125 mm / 8 kg
Interfaces	USB Level 1.1, parallel


Accessories for *wieplot*



Plotter pens for <i>wieplot</i>	Part No.	Type	Part No.
Plotter pen 0.18 mm	95.502.0118.0	Ink cartridge P2.0, 5x1ml	95.502.0199.0
Plotter pen 0.25 mm	95.502.0125.0	Cleaning set	95.502.0198.0
Plotter pen 0.35 mm	95.502.0135.0	Pen cleaner	95.502.0197.0
Plotter pen 0.50 mm	95.502.0150.0	Dust protection hood	95.502.0612.0
Plotter pen 0.70 mm	95.502.0170.0	Service kit – pen station	95.502.0613.0
Plotter pen 1.00 mm	95.502.0100.0	Seal inserts kit	
Dispos plotter pen 0.25 mm	95.502.0125.1		
Dispos plotter pen 0.35 mm	95.502.0135.1		
Dispos plotter pen-D ED 0.25 mm	95.502.0225.1		
Dispos plotter pen-D ED 0.35 mm	95.502.0235.1		

Receptacles for marking plates	
Type	Part No.
Receptacle for WSB	95.502.0620.0
Receptacle for BZ/WKF 15,	95.502.0627.0
Receptacle for BZ/WKF 1,5/10	95.502.0628.0

Engraving unit for *wieplot*



Description	Type	Part No.	Std. Pack
Engraving unit	wieplot E-UNIT	95.502.0700.0	1


Contents: Engraving spindle, engraving head (with fuse and counter bearing), control unit *wieplot* vec, vacuum cleaner *wieplot* vc, connection cables

Description:
The system is set up for engraving multi-layer plastic tags. The Plotboard A4 in a 297 x 202 mm format is the receptacle for marking paper sheets and labels and also enables engraving of plastic boards.

Accessories	Type	Part No.	Std. Pack
Graver SET, complete	SET	95.502.0710.0	1
Graver	0.2 mm	95.502.0710.2	1
Graver	0.3 mm	95.502.0710.3	1
Graver	0.4 mm	95.502.0710.4	1
Graver	0.5 mm	95.502.0710.5	1
Graver	0.7 mm	95.502.0710.7	1
Graver	1.0 mm	95.502.0711.0	1
Receptacle	Plottboard A4	95.502.0625.0	1

Marking plates

• For *wieplot*



Description	Type	Part No.	Std. Pack
Unmarked			
Width 4 x 5 mm	100 tags per plate	9705 4/10/10	Z4.243.2053.0
Width 5 x 8.3 mm	110 tags per plate	9705 A/5/10/11	Z4.242.5053.0
Width 5 x 14 mm	60 tags per plate	9705 AL/5/10/6	Z4.242.5153.0
Width 6 x 8.3 mm	110 tags per plate	9705 A/6/10/11	Z4.242.6053.0
Width 6 x 14 mm	60 tags per plate	9705 AL/6/10/6	Z4.242.6353.0
Width 8 x 8.3 mm	70 tags per plate	9705 A/8/10/7	Z4.242.8053.0

Marking accessories

Single marking tag All blocks/ 5 mm wide and larger

*) Custom marking upon request



Description	Type	Part No.	Std. Pack
Unmarked			
Width 5 x 8.3mm	9705 A	04.242.0850.0	500
Width 5 x 14mm	9705 AL	04.242.1553.0	500
Marked			
Width 5 x 8.3mm	9705 AB *)	04.842.0850.0	500
Width 5 x 14mm	9705 ALB *)	04.842.1553.0	500

Marking strips 1.5 mm²/4 mm wide

*) Custom marking upon request



Description	Type	Part No.	Std. Pack
Marking strips for center block marking			
Unmarked	9705 A 4/10	04.243.2053.0	100
Marked	9705 A 4/10 B *)	04.843.2053.0	25
Marking strips for outer block marking			
Marked	9705 A 4/10/10	Z4.243.2053.0	10

Marking strips 2.5 mm²/5 mm wide

*) Custom marking upon request



Description	Type	Part No.	Std. Pack
Unmarked			
	9705 A/5/10	04.242.5053.0	25
Marked			
1 - 9	9705A/5/9 B 1 - 9	04.842.4953.0	25
*)	9705A/5/10 B	04.842.5053.0	25
1 - 10	9705A/5/10 B 1 - 10	04.845.0153.0	25
11 - 20	9705A/5/10 B 11 - 20	04.845.0253.0	25
21 - 30	9705A/5/10 B 21 - 30	04.845.0353.0	25
31 - 40	9705A/5/10 B 31 - 40	04.845.0453.0	25
41 - 50	9705A/5/10 B 41 - 50	04.845.0553.0	25
51 - 60	9705A/5/10 B 51 - 60	04.845.0653.0	25
61 - 70	9705A/5/10 B 61 - 70	04.845.0753.0	25
71 - 80	9705A/5/10 B 71 - 80	04.845.0853.0	25
81 - 90	9705A/5/10 B 81 - 90	04.845.0953.0	25
91 - 100	9705A/5/10 B 91 - 100	04.845.1053.0	25
⊕ (10x)	9705A/5/10B SLZ	04.855.0053.0	25
≠ (10x)	9705A/5/10B ERDZ	04.855.0153.0	25
+	9705A/5/10 B +	04.855.0253.0	25
-	9705A/5/10 B -	04.855.0353.0	25
L1 (10x)	9705A/5/10B L1	04.855.0453.0	25
L2 (10x)	9705A/5/10B L2	04.855.0553.0	25
L3 (10x)	9705A/5/10B L3	04.855.0653.0	25
PE (10x)	9705A/5/10B PE	04.855.0753.0	25
SL (10x)	9705A/5/10B SL	04.855.3153.0	25
N (10x)	9705A/5/10B N	04.855.3253.0	25
F1 (10x)	9705A/5/10B F1	04.855.0953.0	25
F2 (10x)	9705A/5/10B F2	04.855.1053.0	25
L1,L2,L3,N,PE (10x)	9705A/5/10B L1L2L3NPE..	04.855.0853.0	25
With enlarged marking area			
	9705 AL/5/10	04.242.5153.0	25

Marking strips 4 mm²/6 mm wide

*) Custom marking upon request



Description	Type	Part No.	Std. Pack
Unmarked	9705 A/6/10	04.242.6053.0	25
Marked			
1 – 9	9705A/6/9 B 1 - 9	04.842.5953.0	25
*)	9705A/6/10 B	04.842.6053.0	25
1 – 10	9705A/6/10 B 1 - 10	04.846.0153.0	25
11 – 20	9705A/6/10 B 11 - 20	04.846.0253.0	25
21 – 30	9705A/6/10 B 21 - 30	04.846.0353.0	25
31 – 40	9705A/6/10 B 31 - 40	04.846.0453.0	25
41 – 50	9705A/6/10 B 41 - 50	04.846.0553.0	25
51 – 60	9705A/6/10 B 51 - 60	04.846.0653.0	25
61 – 70	9705A/6/10 B 61 - 70	04.846.0753.0	25
71 – 80	9705A/6/10 B 71 - 80	04.846.0853.0	25
81 – 90	9705A/6/10 B 81 - 90	04.846.0953.0	25
91 – 100	9705A/6/10 B 91 - 100	04.846.1053.0	25
⊕ (10x)	9705A/6/10 B SLZ	04.856.0053.0	25
⊖ (10x)	9705A/6/10 B ERDZ	04.856.0153.0	25
+	9705A/6/10 B +	04.856.0253.0	25
-	9705A/6/10 B -	04.856.0353.0	25
L1 (10x)	9705A/6/10 B L1	04.856.0453.0	25
L2 (10x)	9705A/6/10 B L2	04.856.0553.0	25
L3 (10x)	9705A/6/10 B L3	04.856.0653.0	25
PE (10x)	9705A/6/10 B PE	04.856.0753.0	25
SL (10x)	9705A/6/10 B SL	04.856.3153.0	25
N (10x)	9705A/6/10 B N	04.856.3253.0	25
F1 (10x)	9705A/6/10 B F1	04.856.0953.0	25
F2 (10x)	9705A/6/10 B F2	04.856.1053.0	25
L1,L2,L3,N,PE (10x)	9705A/6/10 B L1L2L3NPE..	04.856.0853.0	25
With enlarged marking area	9705 AL/6/10	04.242.6353.0	25

Marking strips 6 mm²/8 mm wide

*) Custom marking upon request



Description	Type	Part No.	Std. Pack
Unmarked	9705 A/8/10	04.242.8053.0	25
Marked			
1 – 9	9705A/8/9 B 1 - 9	04.842.7953.0	25
*)	9705A/8/10 B	04.842.8053.0	25
1 – 10	9705A/8/10 B 1 - 10	04.848.0153.0	25
11 – 20	9705A/8/10 B 11 - 20	04.848.0253.0	25
21 – 30	9705A/8/10 B 21 - 30	04.848.0353.0	25
31 – 40	9705A/8/10 B 31 - 40	04.848.0453.0	25
41 – 50	9705A/8/10 B 41 - 50	04.848.0553.0	25
51 – 60	9705A/8/10 B 51 - 60	04.848.0653.0	25
61 – 70	9705A/8/10 B 61 - 70	04.848.0753.0	25
71 – 80	9705A/8/10 B 71 - 80	04.848.0853.0	25
81 – 90	9705A/8/10 B 81 - 90	04.848.0953.0	25
91 – 100	9705A/8/10 B 91 - 100	04.848.1053.0	25
⊕ (10x)	9705A/8/10 B SLZ	04.858.0053.0	25
⊖ (10x)	9705A/8/10 B ERDZ	04.858.0153.0	25
+	9705A/8/10 B +	04.858.0253.0	25
-	9705A/8/10 B -	04.858.0353.0	25
L1 (10x)	9705A/8/10 B L1	04.858.0453.0	25
L2 (10x)	9705A/8/10 B L2	04.858.0553.0	25
L3 (10x)	9705A/8/10 B L3	04.858.0653.0	25
PE (10x)	9705A/8/10 B PE	04.858.0753.0	25
SL (10x)	9705A/8/10 B SL	04.858.3153.0	25
N (10x)	9705A/8/10 B N	04.858.3253.0	25
F1 (10x)	9705A/8/10 B F1	04.858.0953.0	25
F2 (10x)	9705A/8/10 B F2	04.858.1053.0	25
L1,L2,L3,N,PE (10x)	9705A/8/10 B L1L2L3NPE..	04.858.0853.0	25

Marking strips 10 mm²/10 mm wide 16 mm²/12 mm wide 35 mm²/16 mm wide 70 mm²/24 mm wide



Description	Type	Part No.	Std. Pack
10 mm²/10 mm wide for 5 blocks	9705 A/5/10/5 B	04.842.5553.0	25
16 mm²/12 mm wide for 5 blocks	9705 A/6/10/5 B	04.842.6553.0	25
35 mm²/16 mm wide for 5 blocks	9705 A/8/10/5 B	04.842.8553.0	25
70 mm²/24 mm wide for 4 blocks	9705 A/8/10/5 B	04.842.8553.0	25

Specify required marking with part no.

Marking accessories

Tear-off marking strips marked with numbers

- With 10 marking tags
- For single symbol marking



Description	Type	Part No.	Std. Pack
Unmarked	9704 A	04.241.1150.0	25
Marked with the same number			
1	9704 A/1 B	04.841.1150.0	25
2	9704 A/2 B	04.841.1250.0	25
3	9704 A/3 B	04.841.1350.0	25
4	9704 A/4 B	04.841.1450.0	25
5	9704 A/5 B	04.841.1550.0	25
6	9704 A/6 B	04.841.1650.0	25
7	9704 A/7 B	04.841.1750.0	25
8	9704 A/8 B	04.841.1850.0	25
9	9704 A/9 B	04.841.1950.0	25
0	9704 A/0 B	04.841.2050.0	25
Marked with consecutive numbers			
1-0	9704 A/1-0 B	04.841.2150.0	25
Marked with the same symbols			
+	9704 A/+	04.841.7450.0	25
-	9704 A/-	04.841.7550.0	25
/	9704 A//	04.841.7650.0	25
.	9704 A/.	04.841.7750.0	25
Set, marked with same numbers (= 10 x 25 strips = 2.500 numbers)			
111 up to 000		04.841.9050.0	1

Tear-off marking strips marked with upper case letters

- With 10 marking tags
- For single symbol marking



Description	Type	Part No.	Std. Pack
Marked with the same upper case letters			
A	9704 A /AG B	04.841.2250.0	25
B	9704 A /BG B	04.841.2350.0	25
C	9704 A /CG B	04.841.2450.0	25
D	9704 A /DG B	04.841.2550.0	25
E	9704 A /EG B	04.841.2650.0	25
F	9704 A /FG B	04.841.2750.0	25
G	9704 A /GG B	04.841.2850.0	25
H	9704 A /HG B	04.841.2950.0	25
I	9704 A /IG B	04.841.3050.0	25
J	9704 A /JG B	04.841.3150.0	25
K	9704 A /KG B	04.841.3250.0	25
L	9704 A /LG B	04.841.3350.0	25
M	9704 A /MG B	04.841.3450.0	25
N	9704 A /NG B	04.841.3550.0	25
O	9704 A /OG B	04.841.3650.0	25
P	9704 A /PG B	04.841.3750.0	25
Q	9704 A /QG B	04.841.3850.0	25
R	9704 A /RG B	04.841.3950.0	25
S	9704 A /SG B	04.841.4050.0	25
T	9704 A /TG B	04.841.4150.0	25
U	9704 A /UG B	04.841.4250.0	25
V	9704 A /VG B	04.841.4350.0	25
W	9704 A /WG B	04.841.4450.0	25
X	9704 A /XG B	04.841.4550.0	25
Y	9704 A /YG B	04.841.4650.0	25
Z	9704 A /ZG B	04.841.4750.0	25
Set, marked with same upper case letters (= 26 x 25 strips = 6.500 numbers)			
A up to Z GB		04.841.9150.0	1

Tear-off marking strips marked with lower case letters

- With 10 marking tags
- For single symbol marking



Description	Type	Part No.	Std. Pack
Marked with the same lower case letters			
a	9704 A /AK B	04.841.4850.0	25
b	9704 A /BK B	04.841.4950.0	25
c	9704 A /CK B	04.841.5050.0	25
d	9704 A /DK B	04.841.5150.0	25
e	9704 A /EK B	04.841.5250.0	25
f	9704 A /FK B	04.841.5350.0	25
g	9704 A /GK B	04.841.5450.0	25
h	9704 A /HK B	04.841.5550.0	25
i	9704 A /IK B	04.841.5650.0	25
j	9704 A /JK B	04.841.5750.0	25
k	9704 A /KK B	04.841.5850.0	25
l	9704 A /LK B	04.841.5950.0	25
m	9704 A /MK B	04.841.6050.0	25
n	9704 A /NK B	04.841.6150.0	25
o	9704 A /OK B	04.841.6250.0	25
p	9704 A /PK B	04.841.6350.0	25
q	9704 A /QK B	04.841.6450.0	25
r	9704 A /RK B	04.841.6550.0	25
s	9704 A /SK B	04.841.6650.0	25
t	9704 A /TK B	04.841.6750.0	25
u	9704 A /UK B	04.841.6850.0	25
v	9704 A /VK B	04.841.6950.0	25
w	9704 A /WK B	04.841.7050.0	25
x	9704 A /XK B	04.841.7150.0	25
y	9704 A /YK B	04.841.7250.0	25
z	9704 A /ZK B	04.841.7350.0	25
Set, Marked with the same lower case letters (= 26 x 25 strips = 6.500 numbers)			
a up to z KB		04.841.9250.0	1

Assortment box

- For marking material



Description	Type	Part No.	Std. Pack
Assortment box for 5 mm width	S0 1/5	04.900.2053.0	1
Assortment for 5 mm width	1-100 9705 A/5/10 B	04.855.1153.0	1
	101-200 9705 A/5/10 B	04.855.1253.0	1
Assortment box for 6 mm width	S0 1/6	04.900.3053.0	1
Assortment for 6 mm width	1-100 9705 A/6/10 B	04.856.1153.0	1
	101-200 9705 A/6/10 B	04.856.1253.0	1
Assortment box for 8 mm width	S0 1/8	04.900.4053.0	1
Assortment for 8 mm width	1-100 9705 A/8/10 B	04.858.1153.0	1
	101-200 9705 A/8/10 B	04.858.1253.0	1
Assortment box for tear-off marking tags with 50 digits each	S0 1/0	04.900.1053.0	1
Assortment box, empty	S0 1	04.900.0000.0	1

Marking tag carrier

- For all blocks



Description	Type	Part No.	Std. Pack
Marking tag carrier, 4 digits	9705 A/4	04.242.0950.0	200
Marking tag carrier, 6 digits	9705 A/6	04.242.1250.0	200
Marking tag carrier, 45° angle	9705 A/4 W	04.242.2853.0	200

Partition

- With marking facilities




Description	Type	Part No.	Std. Pack
Partition with carrier for marking tags for TS32 and TS35		Z7.311.1755.0	10
for TS15		Z7.311.2755.0	10
Partition with carrier for marking cards for TS32 and TS35		Z7.311.7055.0	10
Accessories			
Marking card in perforated sheets	100 tags/sheets	04.019.0289.0	10

Cross connectors and jumper bars


Cross connectors

- Cross connector poles can be individually removed.
- When cross connectors with removed poles are used, the rated voltage is reduced to 400 V.
- You can cut a 10-wire connector plug in half to form two 5-wire connector plugs, but an end cover plate or isolating plate must then be inserted.

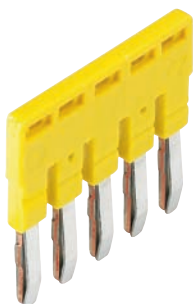

Description	Type	Part No.	Std. Pack
1.5 mm², 4 mm wide			
	IVB WKF 1,5-2	Z7.268.0227.0	10
	IVB WKF 1,5-3	Z7.268.0327.0	10
	IVB WKF 1,5-4	Z7.268.0427.0	10
	IVB WKF 1,5-5	Z7.268.0527.0	10
	IVB WKF 1,5-10	Z7.268.1027.0	10
	IVB WKF 1,5-20	Z7.268.2027.0	10
2.5 mm², 5 mm wide			
	IVB WKF 2,5-2	Z7.280.6227.0	10
	IVB WKF 2,5-3	Z7.280.6327.0	10
	IVB WKF 2,5-4	Z7.280.6427.0	10
	IVB WKF 2,5-5	Z7.280.6527.0	10
	IVB WKF 2,5-6	Z7.280.6627.0	10
	IVB WKF 2,5-7	Z7.280.6727.0	20
	IVB WKF 2,5-8	Z7.280.6827.0	20
	IVB WKF 2,5-9	Z7.280.6927.0	20
	IVB WKF 2,5-10	Z7.280.7027.0	20
	IVB WKF 2,5-20	Z7.280.8027.0	20
	IVB WKF-V	Z7.261.1127.0	10
4 mm², 6 mm wide			
	IVB WKF 4-2	Z7.261.1227.0	10
	IVB WKF 4-3	Z7.261.1327.0	10
	IVB WKF 4-4	Z7.261.1427.0	10
	IVB WKF 4-5	Z7.261.1527.0	10
	IVB WKF 4-6	Z7.261.1627.0	10
	IVB WKF 4-7	Z7.261.1727.0	10
	IVB WKF 4-8	Z7.261.1827.0	10
	IVB WKF 4-9	Z7.261.1927.0	10
	IVB WKF 4-10	Z7.261.2027.0	10
6 mm², 8 mm wide			
	IVB WKFN 6-2	Z7.282.5227.0	10
I _N : 41 A (57 A when using two cross connectors)	IVB WKFN 6-5	Z7.282.5527.0	10
10 mm², 10 mm wide			
	IVB WKF 10-2	Z7.283.8227.0	10
16 mm², 12 mm wide			
	IVB WKF 16-2	Z7.284.4227.0	10
35 mm², 16 mm wide			
	IVB WKF 35-2	Z7.285.6227.0	10
	IVB WKF 35R10-2	Z7.285.6427.0	10
Jumping cross connectors for WT 2,5, WTP 2,5/4 and WKFN 2,5			
3-pole 1-3		99.013.9999.9	10
4-pole 1-4		99.014.9999.9	10
5-pole 1-5		99.015.9999.9	10
5-pole 1 to 3 to 5		99.031.9999.9	10
7-pole 1 to 3, 5 and 7		99.032.9999.9	10
9-pole 1 to 3, 5, 7 and 9		99.033.9999.9	10
11-pole 1 to 3, 5, 7, 9 and 11		99.034.9999.9	10
Additional combinations upon request			

Jumper bar, insulated Jumper comb, insulated

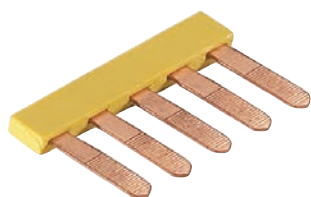

Description	Type	Part No.	Std. Pack
WK 4/U and WK 4 TK, 6 mm wide, 0.5 mm thick			
Jumper comb, insulated	IVB 0,5 WK 4-2	Z7.255.0227.0	10
	IVB 0,5 WK 4-12	Z7.255.0227.0	10
WK 4/U and WK 4 TK, 6 mm wide, 1 mm thick			
Jumper comb, insulated	IVB 1 WK 4-2	Z7.255.4227.0	10
	IVB 1 WK 4-12	Z7.255.4227.0	10
WK 6, WKN 6 TK, WK 4 THSi 6,3x32			
Jumper comb, insulated	IVK WKN 6 TK-2	Z7.255.8227.0	10
	IVK WKN 6 TK-3	Z7.255.8327.0	10
	IVK WKN 6 TK-4	Z7.256.8427.0	10
	IVK WKN 6 TK-5	Z7.256.8527.0	10
	IVK WKN 6 TK-6	Z7.256.8527.0	10


Cover strips and test plugs

Cover strip with warning symbol

- Over 4 blocks, tension spring connection



- Over 4 blocks, screw connection



Description	Type	Part No.	Std. Pack
for tension spring connection			
1.5 mm ² , 4 mm wide	ADF 1,5/5 GELB	04.343.6953.8	10
2.5 mm ² , 5 mm wide	ADFN 2,5/4 GELB	04.343.8353.8	10
4 mm ² , 6 mm wide	ADF 4/4 GELB	04.343.6153.8	10
6 mm ² , 8 mm wide	ADF 6/4 GELB	04.343.6253.8	10
10 mm ² , 10 mm wide	ADF 10/4 GELB	04.343.6453.8	10
16 mm ² , 12 mm wide	ADF 16/4 GELB	04.343.6653.8	10
35 mm ² , 16 mm wide	ADF 35/5 GELB	04.343.9253.8	10

for screw connection			
WKN 35/U, 16 mm wide, screw M5	AD 16/4 GELB	04.343.5256.8	10
WKN 70/U, 24 mm wide, screw M6	AD 24/4 GELB	04.343.5356.8	10
WKN 150/U, 28 mm wide, screw M8	ADN 28/4 GELB	04.343.5456.8	10

Test plug with tension spring connection

- For WT/WTP/WKF... terminal blocks
- For 2.5 mm², 5 mm wide and 4 mm², 6 mm wide



Description	Type	Part No.	Std. Pack
Test plug	PSWKC/F	Z1.299.9753.0	10
Blind piece		01.299.9753.0	10
Endplate	ZP/AP PS	07.312.6053.0	10

General data			
Width	5 mm / 6 mm*		
Wire strip length	8 mm		
Technical data	IEC	UL	CSA
Cross section solid	0.13 – 1.5 mm ²		
Cross section fine-stranded	0.13 – 1.5 mm ²		
Rated current	13.5 A		
Rated voltage	400 V		
Note	* For 6 mm spacing a ZP/AP PS is snapped on behind each test plug or blind piece.		

Test plug

- 250 V / 2 A



Description	Type	Part No.	Std. Pack
Test plug 2.3 mm red	ST 2/2 RT	Z5.553.2921.0	10
Test plug 2.3 mm black	ST 2/2 SW	Z5.553.2921.1	50
Test plug 2.3 mm blue	ST 2/2 BL	Z5.553.2921.6	100
Test plug 4 mm black	ST 2/4 SW	Z5.553.3121.0	10

Tools

Wire entry guides

- For conductors with cross sections smaller than 1 mm²



Description	Type	Part No.	Std. Pack
1.5 mm², 4 mm wide			
for 0.13–0.2 mm ² wires	LEL 1,5/1 WEISS	05.564.4253.0	10
for 0.25–0.5 mm ² wires	LEL 1,5/2 GRAU	05.564.4353.0	10
2.5 mm², 5 mm wide			
for 0.13–0.2 mm ² wires	LELN 2,5/1 WEISS	05.564.3755.0	100
for 0.25–0.5 mm ² wires	LELN 2,5/1 GRAU	05.564.3855.0	100
for 0.75–1.0 mm ² wires	LELN 2,5/1 SCHWARZ	05.564.3955.0	100
4 mm², 6 mm wide			
for 0.13–0.2 mm ² wires	LEL 4/1 WEISS	05.561.8553.0	100
for 0.25–0.5 mm ² wires	LEL 4/2 GRAU	05.561.8653.0	100
for 0.75–1.0 mm ² wires	LEL 4/3 SCHWARZ	05.561.8753.0	100

Notching tool for cross connectors

- For 1.5 mm², wide 4 mm wide
- For 2.5 mm², 5 mm wide
- For 4 mm², 6 mm wide



Description	Type	Part No.	Std. Pack
Notching tool	AKW /A	95.300.0500.0	1

Screwdrivers




Description	Type	Part No.	Std. Pack
1.5 mm², 4 mm wide			
Uninsulated, long and straight	DIN 5264 A 0,4x2,5	06.502.4300.0	5
2.5 mm², 5 mm wide			
Uninsulated, long and straight	DIN 5264 A 0,6x3,5	06.502.4000.0	10
Uninsulated, short and straight	DIN 5264 A 0,6x3,5 M	06.502.5000.0	10
Uninsulated, long and angled	DIN 5264 B 0,6x3,5 W	05.502.4100.0	10
Uninsulated, short and angled	DIN 5264 B 0,6x3,5 MW	05.502.4000.0	10
4 mm², 6 mm wide			
Uninsulated, long and straight	DIN 5264 A 0,6x3,5	06.502.4000.0	10
Uninsulated, short and straight	DIN 5264 A 0,6x3,5 M	06.502.5000.0	10
Uninsulated, long and angled	DIN 5264 B 0,6x3,5 W	05.502.4100.0	10
Uninsulated, short and angled	DIN 5264 B 0,6x3,5 MW	05.502.4000.0	10
6 mm², 8 mm wide	DIN 5264 A 0,8x4	06.502.4100.0	5
10 mm², 10 mm wide	DIN 5264 A 1x5,5	06.502.4200.0	5
16 mm², 12 mm wide	DIN 5264 A 1x5,5	06.502.4200.0	5
35 mm², 16 mm wide	DIN 5264 A 1x5,5	06.502.4200.0	5

Ferrules and tools


Ferrules with insulating material sleeve

- **Materials:**
Sleeve: Polypropylene, temperature resistance 105°C, creepage resistant
Tube: E-Cu, galvanically tin-plated

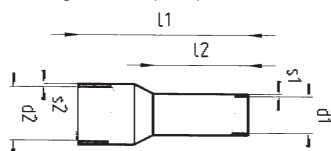

without insulating material sleeve

- **Materials:** Tube: E-Cu, galvanically tin-plated

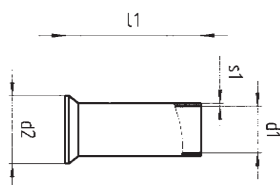

Cross section mm ²	Color	Type	Part No.	Std. Pack
Ferrules with insulating material sleeve according to DIN 46228 T4				
0.50	norm.	white	06.600.2027.0	500
0.75	norm.	gray	06.600.2127.0	500
1.00	norm.	red	06.600.2227.0	500
1.50	norm.	black	06.600.2327.0	500
1.50	long	black	06.600.2427.0	500
2.50	norm.	blue	06.600.2527.0	500
2.50	long	blue	06.600.2627.0	500
4.00	norm.	gray	06.600.2727.0	500
4.00	long	gray	06.600.2827.0	100
6.00	norm.	yellow	06.600.2927.0	100
6.00	long	yellow	06.600.3027.0	100
10.00	norm.	red	06.600.3127.0	100
10.00	long	red	06.600.3227.0	100
16.00	norm.	blue	06.600.3327.0	100
16.00	long	blue	06.600.3427.0	100
25.00	mid-length	yellow	06.600.3527.0	50
Ferrules without insulating material sleeve according to DIN 46228 T1				
0.50	norm.		06.600.4027.0	1000
0.75	norm.		06.600.4127.0	1000
1.00	norm.		06.600.4227.0	1000
1.50	norm.		06.600.4327.0	1000
2.50	norm.		06.600.4427.0	1000
4.00	norm.		06.600.4527.0	1000
6.00	norm.		06.600.4627.0	500
10.00	norm.		06.600.4727.0	500
16.00	norm.		06.600.4827.0	100
25.00	norm.		06.600.4927.0	100
35.00	norm.		06.600.5027.0	100

Wire strippers



Description	Type	Part No.	Std. Pack
Wire strippers	AIW/A	95.350.0100.0	1
General data			
Wire strip length	0.08 - 10 mm ²		
Cross section, AWG	28 - 7		

Crimping tool

- for ferrules




Description	Type	Part No.	Std. Pack
Pressing tool A	Length: 180 mm PW/A	95.101.1300.0	1
Pressing tool B	Length: 203 mm PW/B	95.101.1100.0	1
Pressing tool C	Length: 203 mm PW/C	95.101.1200.0	1
General data			
A: Wire strip length	0.08 - 10 mm ²		
A: Cross section, AWG	28 - 7		
B: Wire strip length	10 - 25 mm ²		
B: Cross section, AWG	7 - 4		
C: Wire strip length	35 - 50 mm ²		
C: Cross section, AWG	2 - 1/0		

Tables, technical data

DIN rail terminal blocks

Material selection *selos* and *fasis*

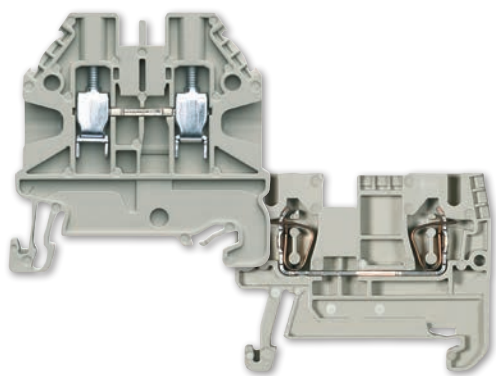

Metal parts

- Special alloys enable low feed-through resistance and provide a gas-tight contact area:
 - Current carrying bar: Copper, or brass
 - Clamping body and clamping screws: Galvanized and chromated steel
 - Clamping spring: CrNi stainless steel
 - Current carrying bar: Copper, tinned

Plastic materials

- Polyamide has excellent electrical, chemical and mechanical characteristics:
 - Temperature resistance: Up to 120°C
 - Creepage resistance: CTI 600
 - Flammability class: Self-extinguishing, UL94-V0

Electrical and thermal characteristics of plastic materials

Key figures / characteristics	Standard		Unit	Thermoplast	
				Polyamide PA 666	
Dielectric strength	VDE 0303-T21	IEC 243/1	kV / mm	tr./lf.	55 / 45
Dielectric loss tan δ at 1 MHz	VDE 0303-T4	IEC 250		tr./lf.	0.02 / 0.3
Specific feed through resistance	VDE 0303-T30	IEC 93	Ω x cm	lf.	10^{12}
Surface resistance	VDE 0303-T30	IEC 93	Ω	lf.	10^{10}
Creepage	VDE 0303-T1	IEC 112	CTI		600
Operating temperature RTI *	UL 746 B		°C at 1.5 mm		120
Temperature index TI **	VDE 0304 T.21	IEC 216-1	°C		123 / 107
Minimum operating temperature without mechanical stress			°C		-40
Flammability	UL 94		Class / material thickness		V0 / 0.4
Suitability for tropical areas					good

* electrical value

** related to 50% strain resistance drop after 5,000/20,000 hours

Standard cross sections of round copper conductors AWG/metric

Metric size ISO mm ²	Comparison between AWG/kcmil and metric sizes			Metric size ISO mm ²	Comparison between AWG/kcmil and metric sizes		
	AWG	kcmil	mm ²		AWG	kcmil	mm ²
0.1*	28		0.081	16	6		13.3
0.14*	26		0.128	25	4		21.2
0.2	24		0.205	35	2		33.6
–	22		0.324	50	(1/0) 0		53.5
0.5	20		0.519	70	(2/0) 00		67.4
0.75	18		0.82	95	(3/0) 000		85
1	–		–	–	(4/0) 0000		107.2
1.5	16		1.3	120		250	127
2.5	14		2.1	150		300	152
4	12		3.3	185		350	177
6	10		5.3	240		500	253
10	8		8.4	300		600	304

* not standardized

Mounting rails

Maximum short-time current capability assigned to mounting rails

DIN EN 60 947-7-2

Rail profile	Material	Equivalent E-Cu cross section mm ²	Short-time-current capability	Rated thermal current of a PEN busbar
			1 s kA	A
DIN rail TH 15 x 5,5 according to IEC 60 715	Steel	10	1.2	–
G rail TS 32 according to IEC 60 715	Steel	35	4.2	–
	Copper ¹⁾	120	14.4	269
	Aluminium ¹⁾	70	8.4	192
DIN rail TS 35 x 27 x 7,5 according to IEC 60 715	Steel	16	1.92	–
DIN rail TS 35 x 27 x 15 according to IEC 60 715	Steel	25	3	–
DIN rail TS 35 x 24 x 15 according to IEC 60 715 (made from 2.3 mm thick material)	Steel	50	6	–
	Copper ¹⁾	150	18	309

¹⁾ Selected copper or aluminum alloys from the manufacturer of the terminal block layout were used to achieve the values in the table.

Torques

Torque according to EN 60947-1 for **selos** DIN rail terminal blocks

- II applies for screws that are tightened with a screwdriver
- III applies for screws that can be tightened with tools other than a screwdriver

			II	III
WT 2.5, width 5 mm	M2.5 clamping body screw	Nm	0.4	
WT 4 ... , width 6 mm	M3 clamping body screw	Nm	0.5	
WT 6 and WKN 6, width 8 mm	M4 clamping body screw	Nm	1.2	
	M3.5 screw for cross connector	Nm	0.8	
WT 10, width 10 mm	M4 clamping body screw	Nm	1.2	
WT 16, width 12 mm	M5 clamping body screw	Nm	2.0	
WKN 35, width 16 mm	M6 clamping body screw	Nm	2.5	3.0
	M5 screw for cross connector	Nm	2.0	2.0
WKN 70, width 24 mm	M8 clamping body screw	Nm	3.5	6.0
	M6 screw for cross connector	Nm	2.5	3.0
WKN 150, width 28 mm	M10 clamping body screw	Nm	4.0	10.0
	M8 screw for cross connector	Nm	3.5	6.0

Information about Ex applications

DIN rail terminal blocks for installations with explosion hazard (Ex terminals) Protection category Increased safety "e"

Ex terminals are DIN rail terminal blocks that have been tested and certified by a European Ex test institute according to

EN 60 079-0 – VDE 0170/0171 part 1 "General requirements" and

EN 60 079-7 – VDE 0170/0171 part 6 Protection category: Increased safety "e"

DIN EN 60079-0, VDE 0170-1: Explosionsfähige Atmosphäre - Teil 0: Geräte - Allgemeine Anforderungen (IEC 60079-0); Deutsche Fassung EN 60079-0

DIN EN 60079-7, VDE 0170-6: Explosionsfähige Atmosphäre - Teil 7: Geräteschutz durch erhöhte Sicherheit „e“ (IEC 60079-7); Deutsche Fassung EN 60079-7

The protection category Increased safety "e" applies to electrical equipment that resists sparks, electric arcing or hazardous surface temperatures during operation. DIN rail terminal blocks thus fall into temperature category T6 in which electrical equipment at an ambient temperature of 40 °C and proper use does not exceed the maximum temperature (surface temperature) of 85 °C.

Certifying test institutes are, for example, the Physikalisch Technische Bundesanstalt PTB in Germany, the Laboratoire Central des Industries Electrique LCIE in France, the Health and Safety Executive BSEFEA in Great Britain, the EX laboratory of ASEV in Switzerland, among others.

However, for DIN rail terminal blocks as incomplete electrical equipment, only a partial certification is issued. This certificate is the basis for the final acceptance and certification of the complete installation before it is commissioned by an expert.

The certificate (prototype test certificate) includes a description of the DIN rail terminal blocks, in which special requirements regarding the preparation of terminal strips are put into place, for example, installing partitions and end plates when terminal blocks are connected in series. This information is also provided in our catalog that in this case serves as an instruction manual.

Test Certificate

Certificates from notified bodies are available for feed-through terminal blocks of series WK(N).., WKF.., WKFN.., WT and ground blocks of series WK..SL.., WKF..SL.., WKFN..SL.. as well as **revos** Ex industrial multipole connectors.

The certificates indicate the relevant rated values and include the accessories listed in the description.

The areas of application are divided into:

Group I: Electrical equipment for mine openings with firedamp hazard

Group II: Electrical equipment for hazardous areas except for mine openings with firedamp hazard (for example installations with explosion hazard for the chemical and petrochemical industry).

According to a resolution of the DEK (Deutsche Elektrotechnische Kommission) terminal blocks are also accepted as electrical equipment for Group I (firedamp protection Ex e I) for which only the increased safety protection type 'e' for Group II (explosion protection Ex e II) has been certified and vice versa.

Ex protected DIN rail terminal blocks are identified with distinct safety protection and an additional marking according to ATEX directive 2014/34/EU. The complete test certificate with a description is available on request or it can be downloaded from Wieland Electric Download Center.

Protection category "Intrinsic safety Ex i"



The DIN rail terminal blocks can be used in Group II (Category 2) and Group 1 (Category M2) equipment, as the standard requirements are identical in this case.

It has been generally accepted that feed-through terminals in intrinsic circuits are clearly marked with the blue coloring of the insulated housing. For intrinsic circuits, feed-through terminals can be used in the standard version and if required are available with blue insulating housing.

Technical information

- The information regarding cross sectional area and connection types pertains to unprepared wires without ferrules! Ferrules are not necessary for secure connection. Whenever ferrules are used, make sure that the tools specified by the manufacturer are used exclusively.
- The voltage ratings apply to the terminals in their intended application. When different products are mounted adjacent to each other, the proper isolation distances must be adhered to.
- If the ground blocks are not used in block assemblies, but are mounted to the rail as single terminal blocks, end clamps have to be used.
- A detailed description of technical data, the standards requirements, and the application conditions are available in the flyer **facts & DATA**.

ATEX regulation

- For the use of DIN rail terminal blocks in Ex areas, the regulations of EN 60079-0 apply; whereas for increased safety Exe the regulations of EN 60079-7 must be followed. For an approximation of the laws of the EU member states, directive 2014/34/EU was created, which is generally known as ATEX 100a and which is the basis for harmonization in this field. ATEX stands for "atmosphere explosive" while 100a refers to the corresponding article of the EC contract.
- Directive ATEX 100a applies for protection against dust and gas explosions in all industrial Ex areas and in mining. The testing and certificating institutes named in directive ATEX 100a must follow accreditation procedures which are the same throughout Europe.
- In accordance with EN 60070-0/60079-7 and ATEX 100a, these certifying institutes write out EC certificates for prototype tests. These prototype test certificates for components together with the corresponding quality system certification of the supplier are required to obtain the so-called ATEX approval.
- In combination with the  mark, the markings of the Wieland terminal blocks have the following meaning:
 -  Identification
 - II Device group
 - 2 Category
 - G D Areas
 - KEMA Name of testing institute
 - ATEX... Certificate, year of testing, number

Mounting instructions for Ex e applications

- If feed-through blocks are mounted directly adjacent to other feed-through blocks of a different size, or directly adjacent to ground blocks, the open side of the block group of the same type must be covered by an end plate or partition.
- If adjacent DIN rail terminal blocks are jumpered or if jumpered DIN rail terminal blocks are positioned next to unjumpered DIN rail terminal blocks, a partition plate must be inserted between the individual terminal block groups or at the beginning and end of a laterally or longitudinally connected terminal block (group) in order to meet the specified isolation distances. Notched out and jumpering cross connectors can not be used in Ex areas.
- If the terminal blocks are combined with other certified series and sizes and when their accessories are used, the required creepage distances and clearances must be adhered to.
- The feed through terminal blocks and protective conductor terminal blocks are suitable for enclosures for use in explosive gas atmospheres or for use in the presence of combustible dust. For explosive gas atmospheres these enclosures must satisfy the requirements of EN 60079-0 and EN 60079-7. For combustible dust these enclosures must satisfy the requirements of 60079-0 and EN 60079-31.
- If the DIN rail terminal blocks are installed in a housing with protection type "e" (increased safety) according to EN 60079-7, the clearances and creepage distances stated in Table 1 must be adhered to..
- The indicated values for the current carrying capability refer to a maximum ambient temperature of 40 °C. When the terminal blocks are loaded with the maximum rated current the temperature rise will be max. 45 K.
- Operating temperature range: -40°C ... +80°C, series WK(N)/M..., WKF..., WT
 -20°C ... +80°C, series WKFN
- If cables are used whose cross-section is smaller than the nominal cable cross-section, the corresponding lower current must be specified in the EC prototype test certificate for the complete device.
- Due to the heat generated during operation at the specified current and at ambient temperatures of ≤ 40 °C, the DIN rail terminal blocks can be installed in equipment (mainly distribution and connection boxes) suitable for temperature class T6. If DIN rail terminal blocks are installed in equipment with a temperature class ranging from T1 to T5, it must be ensured that the maximum temperature of the insulating parts does not exceed the maximum value in the operating temperature range.



Temperature classes

Temperature class	T1	T2	T3	T4	T5	T6
Maximum surface temperature at equipment in °C	450	300	200	135	120	85

SCCR Values for DIN rail terminal blocks

As a result of changes to the 2005 NEC, both the operator and manufacturer of electrical equipment must comply with increased requirements related to resistance to short-circuiting of equipment. In accordance with both the NEC 2005 Article 409.110 and UL 508A, the short circuit resistance of the complete installation must now be considered. The installation's Short Circuit Current Rating must be indicated on the equipment or control panel's legend plate.

Wieland has tested and determined individual SCCR values for their terminal blocks in connection with the widest variety of fuses. These ratings are far greater than the default values contained in UL 508A. As a result, when qualifying your installation, you have increased flexibility and accuracy when using Wieland terminal blocks.

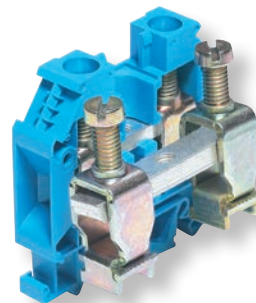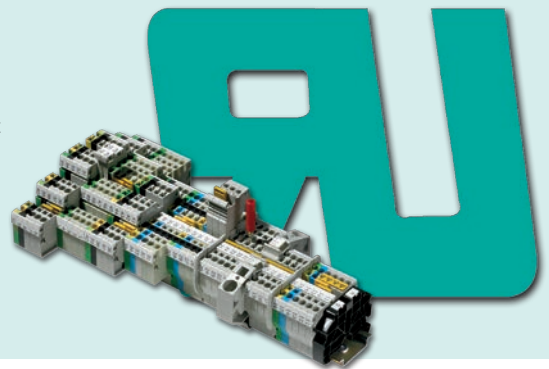



What does SCCR marking mean?

The Short Circuit Current Rating (SCCR) of a component represents the maximum short circuit current level a device can safely withstand without compromising safety for installations and personnel. Article 409 on industrial control panels was added to the NEC in the 2005 edition. This article calls for all industrial control panels to be marked with a Short Circuit Current Rating. The Short Circuit Current Rating (SCCR) requirements for UL 508A came into force in April 2006.

How is the SCCR marking determined?

The NEC Article 409 refers to the UL 508A Supplement SB as an approved method for determining the SCCR of an industrial control panel. This specific method is outlined in Section SB4.

1. Determination of the SCCR values of individual components, for example DIN rail terminal blocks
2. Modification of the SCCR values through the use of current limiting devices per UL 508 SB 4.3
3. Selection of the lowest SCCR value from all the components

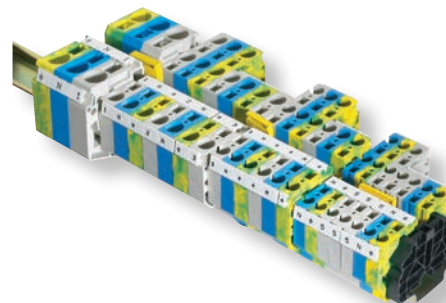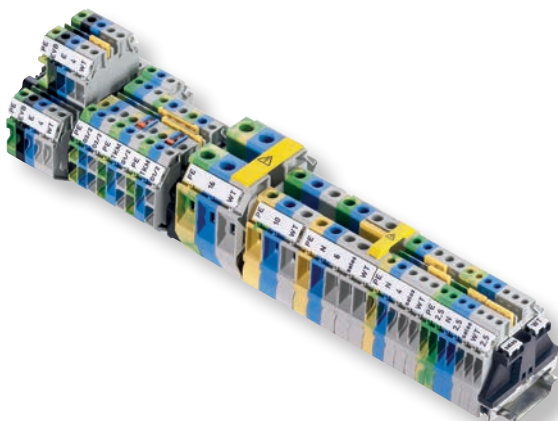

SCCR for DIN rail terminal blocks in general

The SCCR of a terminal block can be determined according to UL 508A using one of the following methods:

1. Use the tested SCCR value
2. Use the default SCCR value as specified in table 4.1 of UL 508

If the DIN rail terminal blocks do not have a tested SCCR, then the UL default value of 10kA must be used. This relatively low value would limit the SCCR of the entire system to max. 10kA.


SCCR for Wieland DIN rail terminal blocks

Wieland determined SCCR values for its DIN rail terminal blocks used in conjunction with fuses and circuit breakers. The resulting SCCR values are much higher than the values specified for DIN rail terminal blocks in table SB 4.1 of UL 508A.

You will find the tested SCCR values for our **selos** and **fasis** product series in our customer information 0019.3, available on www.wieland-electric.com.

The SCCR values are also published on the UL website (<http://www.ul.com>) under file number E60678.

Customized assembly

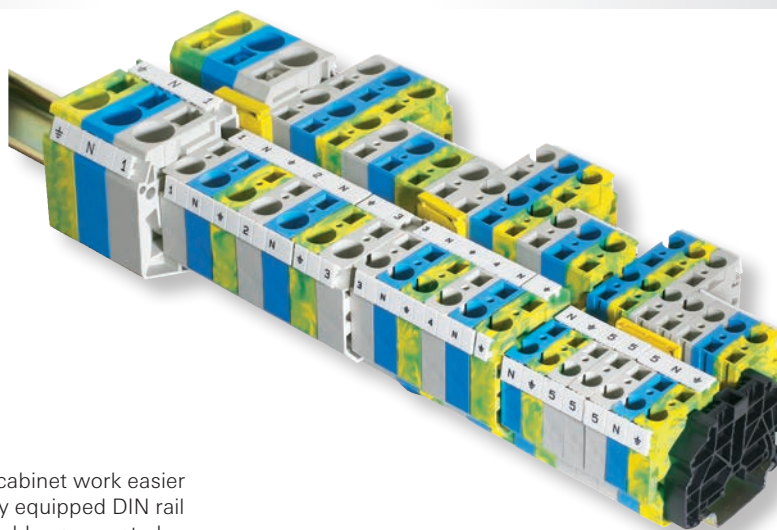

Terminal block assemblies

For those who want to make their control cabinet work easier Wieland Electric pre-assembles completely equipped DIN rail terminal block assemblies, even with the cables connected, if required.

Cable assemblies

Individual cables tailored to your needs and combined with various components can be delivered for your project in all lengths.





Control and distribution panels

Our value-add departments will gladly assist you in selecting individual Wieland components, or in laying out complete panels, which we can also build for you.

Interface modules – solution specific connectivity

Each control cabinet requires distribution functionality. In most cases this is accomplished with standard control panel wiring (0.5 mm or 1.5 mm fine stranded with ferrule) to standardized interfaces (d-sub or ribbon cables). Upon the customer's request Wieland Electric can design individual and customized solutions for all applications, too.

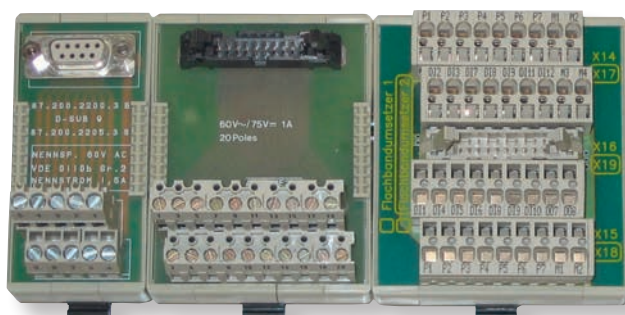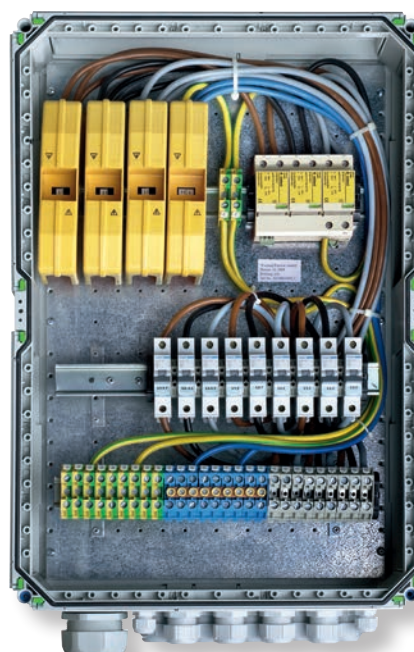

Part number | page

01.108.7653.0	149	04.343.6053.8	110	04.410.1981.0	155	04.841.5550.0	162
01.299.9753.0	165	04.343.6153.8	79	04.410.2081.2	155	04.841.5650.0	162
04.019.0289.0	148	04.343.6153.8	86	04.410.2081.8	155	04.841.5750.0	162
04.019.0289.0	148	04.343.6153.8	102	04.420.0181.2	156	04.841.5850.0	162
04.019.0289.0	149	04.343.6153.8	103	04.420.0181.8	156	04.841.5950.0	162
04.019.0289.0	149	04.343.6153.8	105	04.420.0381.2	156	04.841.6050.0	162
04.019.0289.0	163	04.343.6153.8	165	04.420.0481.2	156	04.841.6150.0	162
04.019.1189.0	148	04.343.6253.8	80	04.420.0581.2	156	04.841.6250.0	162
04.019.1189.0	149	04.343.6253.8	87	04.420.0681.2	156	04.841.6350.0	162
04.241.1150.0	162	04.343.6253.8	165	04.420.0781.0	157	04.841.6450.0	162
04.242.0850.0	160	04.343.6453.8	81	04.420.0781.2	157	04.841.6550.0	162
04.242.0950.0	163	04.343.6453.8	89	04.420.0781.8	157	04.841.6650.0	162
04.242.1250.0	163	04.343.6453.8	165	04.420.1081.0	157	04.841.6750.0	162
04.242.1553.0	160	04.343.6653.8	77	04.420.1081.2	157	04.841.6850.0	162
04.242.2853.0	163	04.343.6653.8	79	04.420.1081.8	157	04.841.6950.0	162
04.242.5053.0	160	04.343.6653.8	82	04.420.1281.0	157	04.841.7050.0	162
04.242.5153.0	160	04.343.6653.8	82	04.420.1281.2	157	04.841.7150.0	162
04.242.6053.0	161	04.343.6653.8	89	04.420.1381.0	157	04.841.7250.0	162
04.242.6353.0	161	04.343.6653.8	105	04.420.1481.2	157	04.841.7350.0	162
04.242.8053.0	161	04.343.6653.8	165	04.420.1581.2	156	04.841.7450.0	162
04.243.0755.0	93	04.343.6853.8	111	04.420.1581.8	156	04.841.7550.0	162
04.243.0855.0	95	04.343.6953.8	75	04.420.1681.2	156	04.841.7650.0	162
04.243.0855.0	97	04.343.6953.8	84	04.420.1681.8	156	04.841.7750.0	162
04.243.0855.0	136	04.343.6953.8	90	04.420.1781.2	156	04.841.9050.0	162
04.243.0855.0	136	04.343.6953.8	165	04.420.1781.8	156	04.841.9150.0	162
04.243.0953.0	90	04.343.8353.8	77	04.420.1881.2	156	04.841.9250.0	162
04.243.0953.0	90	04.343.8353.8	85	04.841.1150.0	162	04.842.0850.0	160
04.243.0953.0	90	04.343.8353.8	93	04.841.1250.0	162	04.842.1553.0	160
04.243.2053.0	160	04.343.8353.8	95	04.841.1350.0	162	04.842.4953.0	160
04.243.8550.0	148	04.343.8353.8	97	04.841.1450.0	162	04.842.5053.0	160
04.243.8550.0	149	04.343.8353.8	101	04.841.1550.0	162	04.842.5553.0	161
04.244.0053.0	118	04.343.8353.8	109	04.841.1650.0	162	04.842.5953.0	161
04.244.0053.0	119	04.343.8353.8	110	04.841.1750.0	162	04.842.6053.0	161
04.244.0053.0	121	04.343.8353.8	111	04.841.1850.0	162	04.842.6553.0	161
04.244.0053.8	121	04.343.8353.8	165	04.841.1950.0	162	04.842.7953.0	161
04.304.0181.0	53	04.343.9056.8	37	04.841.2050.0	162	04.842.8053.0	161
04.304.0181.0	53	04.343.9156.8	37	04.841.2150.0	162	04.842.8553.0	161
04.304.0281.0	53	04.343.9253.8	89	04.841.2250.0	162	04.842.8553.0	161
04.304.0281.0	53	04.343.9253.8	165	04.841.2350.0	162	04.843.2053.0	160
04.312.2056.0	34	04.344.1455.8	15	04.841.2450.0	162	04.844.2053.0	118
04.325.1056.0	65	04.344.1655.8	15	04.841.2550.0	162	04.844.2053.0	119
04.325.1156.0	66	04.344.1855.8	15	04.841.2650.0	162	04.844.2053.0	121
04.325.1256.0	66	04.344.1855.8	15	04.841.2750.0	162	04.844.2153.0	118
04.325.1356.0	67	04.344.2255.8	15	04.841.2850.0	162	04.844.2153.0	119
04.325.1456.0	67	04.400.0081.2	153	04.841.2950.0	162	04.844.2153.0	121
04.325.1656.0	65	04.400.0181.2	153	04.841.3050.0	162	04.844.2253.0	118
04.326.2053.8	24	04.405.0056.0	153	04.841.3150.0	162	04.844.2253.0	119
04.326.2053.8	29	04.405.1056.0	153	04.841.3250.0	162	04.844.2253.0	121
04.326.2053.8	37	04.405.1156.0	153	04.841.3350.0	162	04.845.0153.0	160
04.326.2153.8	39	04.405.1256.0	153	04.841.3450.0	162	04.845.0253.0	160
04.326.2253.8	46	04.406.0056.0	153	04.841.3550.0	162	04.845.0353.0	160
04.326.2353.8	46	04.406.0156.0	153	04.841.3650.0	162	04.845.0453.0	160
04.326.2553.8	16	04.408.0056.0	153	04.841.3750.0	162	04.845.0553.0	160
04.326.2653.8	16	04.410.0181.0	154	04.841.3850.0	162	04.845.0653.0	160
04.326.2953.8	56	04.410.0281.0	154	04.841.3950.0	162	04.845.0753.0	160
04.326.3053.8	56	04.410.0381.0	154	04.841.4050.0	162	04.845.0853.0	160
04.326.3053.8	57	04.410.0481.0	154	04.841.4150.0	162	04.845.0953.0	160
04.326.3053.8	57	04.410.0581.0	154	04.841.4250.0	162	04.845.1053.0	160
04.342.0556.0	29	04.410.0681.0	154	04.841.4350.0	162	04.846.0153.0	161
04.342.3556.8	36	04.410.0781.0	154	04.841.4450.0	162	04.846.0253.0	161
04.343.4756.8	24	04.410.0881.0	154	04.841.4550.0	162	04.846.0353.0	161
04.343.4956.8	46	04.410.0981.0	154	04.841.4650.0	162	04.846.0453.0	161
04.343.5056.8	46	04.410.1081.2	154	04.841.4750.0	162	04.846.0553.0	161
04.343.5256.8	16	04.410.1081.8	154	04.841.4850.0	162	04.846.0653.0	161
04.343.5256.8	165	04.410.1281.2	154	04.841.4950.0	162	04.846.0753.0	161
04.343.5356.8	16	04.410.1481.8	155	04.841.5050.0	162	04.846.0853.0	161
04.343.5356.8	165	04.410.1581.0	155	04.841.5150.0	162	04.846.0953.0	161
04.343.5456.8	16	04.410.1681.2	155	04.841.5250.0	162	04.846.1053.0	161
04.343.5456.8	165	04.410.1781.0	155	04.841.5350.0	162	04.848.0153.0	161
04.343.6053.8	110	04.410.1881.2	155	04.841.5450.0	162	04.848.0253.0	161

04.848.0353.0	161	05.511.2953.0	45	05.564.3755.0	97	06.502.4000.0	166
04.848.0453.0	161	05.511.2953.6	45	05.564.3755.0	101	06.502.4000.0	166
04.848.0553.0	161	05.511.2953.7	45	05.564.3755.0	109	06.502.4100.0	80
04.848.0653.0	161	05.511.2953.8	45	05.564.3755.0	132	06.502.4100.0	87
04.848.0753.0	161	05.511.2953.9	45	05.564.3755.0	134	06.502.4100.0	133
04.848.0853.0	161	05.561.0053.0	36	05.564.3755.0	137	06.502.4100.0	135
04.848.0953.0	161	05.561.0053.0	36	05.564.3755.0	166	06.502.4100.0	166
04.848.1053.0	161	05.561.0053.0	111	05.564.3855.0	77	06.502.4200.0	77
04.855.0053.0	160	05.561.4125.0	37	05.564.3855.0	85	06.502.4200.0	79
04.855.0153.0	160	05.561.6553.0	110	05.564.3855.0	93	06.502.4200.0	81
04.855.0253.0	160	05.561.6553.0	110	05.564.3855.0	95	06.502.4200.0	83
04.855.0253.5	29	05.561.6553.0	118	05.564.3855.0	97	06.502.4200.0	89
04.855.0353.0	160	05.561.6553.0	119	05.564.3855.0	101	06.502.4200.0	105
04.855.0353.6	29	05.561.6553.0	121	05.564.3855.0	109	06.502.4200.0	166
04.855.0453.0	160	05.561.6653.0	110	05.564.3855.0	132	06.502.4200.0	166
04.855.0553.0	160	05.561.6653.0	110	05.564.3855.0	134	06.502.4200.0	166
04.855.0653.0	160	05.561.6653.0	118	05.564.3855.0	137	06.502.4300.0	75
04.855.0753.0	160	05.561.6653.0	119	05.564.3855.0	166	06.502.4300.0	84
04.855.0853.0	160	05.561.6653.0	121	05.564.3955.0	77	06.502.4300.0	166
04.855.0953.0	160	05.561.6753.0	110	05.564.3955.0	85	06.502.5000.0	77
04.855.1053.0	160	05.561.6753.0	110	05.564.3955.0	93	06.502.5000.0	79
04.855.1153.0	163	05.561.6753.0	118	05.564.3955.0	95	06.502.5000.0	85
04.855.1253.0	163	05.561.6753.0	119	05.564.3955.0	97	06.502.5000.0	86
04.855.3153.0	160	05.561.6753.0	121	05.564.3955.0	101	06.502.5000.0	95
04.855.3253.0	160	05.561.8553.0	79	05.564.3955.0	109	06.502.5000.0	101
04.856.0053.0	161	05.561.8553.0	86	05.564.3955.0	132	06.502.5000.0	102
04.856.0153.0	161	05.561.8553.0	99	05.564.3955.0	134	06.502.5000.0	103
04.856.0253.0	161	05.561.8553.0	102	05.564.3955.0	137	06.502.5000.0	105
04.856.0353.0	161	05.561.8553.0	103	05.564.3955.0	166	06.502.5000.0	109
04.856.0453.0	161	05.561.8553.0	105	05.564.4253.0	75	06.502.5000.0	109
04.856.0553.0	161	05.561.8553.0	166	05.564.4253.0	84	06.502.5000.0	117
04.856.0653.0	161	05.561.8653.0	79	05.564.4253.0	90	06.502.5000.0	132
04.856.0753.0	161	05.561.8653.0	86	05.564.4253.0	166	06.502.5000.0	134
04.856.0853.0	161	05.561.8653.0	99	05.564.4353.0	75	06.502.5000.0	137
04.856.0953.0	161	05.561.8653.0	102	05.564.4353.0	84	06.502.5000.0	166
04.856.1053.0	161	05.561.8653.0	103	05.564.4353.0	90	06.502.5000.0	166
04.856.1153.0	163	05.561.8653.0	105	05.564.4353.0	166	06.600.2027.0	167
04.856.1253.0	163	05.561.8653.0	166	05.566.6855.9	43	06.600.2127.0	167
04.856.3153.0	161	05.561.8753.0	79	05.567.9155.0	109	06.600.2227.0	167
04.856.3253.0	161	05.561.8753.0	86	05.576.5853.0	36	06.600.2327.0	167
04.858.0053.0	161	05.561.8753.0	99	05.584.0053.0	36	06.600.2427.0	167
04.858.0153.0	161	05.561.8753.0	102	05.592.7553.0	39	06.600.2527.0	167
04.858.0253.0	161	05.561.8753.0	103	05.592.7653.0	39	06.600.2627.0	167
04.858.0353.0	161	05.561.8753.0	105	05.593.5953.0	66	06.600.2727.0	167
04.858.0453.0	161	05.561.8753.0	166	05.902.3500.0	118	06.600.2827.0	167
04.858.0553.0	161	05.561.9153.0	37	05.902.3500.0	119	06.600.2927.0	167
04.858.0653.0	161	05.562.2453.0	110	05.902.3500.0	121	06.600.3027.0	167
04.858.0753.0	161	05.562.2453.0	111	06.502.4000.0	77	06.600.3127.0	167
04.858.0853.0	161	05.562.2453.0	114	06.502.4000.0	79	06.600.3227.0	167
04.858.0953.0	161	05.562.2453.0	114	06.502.4000.0	85	06.600.3327.0	167
04.858.1053.0	161	05.562.2453.0	114	06.502.4000.0	86	06.600.3427.0	167
04.858.1153.0	163	05.562.2453.0	115	06.502.4000.0	95	06.600.3527.0	167
04.858.1253.0	163	05.562.2553.0	110	06.502.4000.0	101	06.600.4027.0	167
04.858.3153.0	161	05.562.2553.0	111	06.502.4000.0	102	06.600.4127.0	167
04.858.3253.0	161	05.562.2553.0	114	06.502.4000.0	103	06.600.4227.0	167
04.900.0000.0	163	05.562.2553.0	114	06.502.4000.0	105	06.600.4327.0	167
04.900.1053.0	163	05.562.2553.0	114	06.502.4000.0	109	06.600.4427.0	167
04.900.2053.0	163	05.562.2553.0	115	06.502.4000.0	109	06.600.4527.0	167
04.900.3053.0	163	05.562.2653.0	110	06.502.4000.0	111	06.600.4627.0	167
04.900.4053.0	163	05.562.2653.0	111	06.502.4000.0	114	06.600.4727.0	167
05.502.4000.0	166	05.562.2653.0	114	06.502.4000.0	114	06.600.4827.0	167
05.502.4000.0	166	05.562.2653.0	114	06.502.4000.0	114	06.600.4927.0	167
05.502.4100.0	166	05.562.2653.0	114	06.502.4000.0	115	06.600.5027.0	167
05.502.4100.0	166	05.562.2653.0	115	06.502.4000.0	117	07.201.1227.6	50
05.508.3121.0	66	05.563.5453.0	45	06.502.4000.0	118	07.201.1327.6	50
05.508.3221.0	66	05.564.0753.0	53	06.502.4000.0	119	07.201.3227.6	50
05.508.6521.0	67	05.564.3755.0	77	06.502.4000.0	121	07.201.3327.6	50
05.508.6521.0	67	05.564.3755.0	85	06.502.4000.0	132	07.201.4227.0	54
05.508.8821.0	65	05.564.3755.0	93	06.502.4000.0	134	07.201.4227.0	55
05.508.8921.0	65	05.564.3755.0	95	06.502.4000.0	137	07.201.4327.0	54

Part number | page

07.201.4327.0	55	07.311.6855.0	63	07.312.6955.0	85	07.312.9155.0	78
07.201.4427.0	54	07.311.6855.0	63	07.312.6955.0	100	07.312.9155.0	102
07.201.4427.0	55	07.311.6955.0	62	07.312.6955.0	108	07.312.9155.0	102
07.201.5227.6	50	07.311.6955.0	62	07.312.6955.0	132	07.312.9155.0	103
07.201.5327.6	50	07.311.7855.0	16	07.312.6955.0	134	07.312.9155.0	104
07.201.7227.6	51	07.311.7955.0	16	07.312.6955.6	76	07.312.9155.0	104
07.201.7327.6	51	07.311.8155.0	31	07.312.6955.6	108	07.312.9255.0	78
07.201.8227.0	55	07.311.8155.0	33	07.312.7055.0	76	07.312.9255.0	86
07.201.8327.0	55	07.311.8353.0	126	07.312.7055.0	100	07.312.9255.6	78
07.201.8427.0	55	07.311.8353.0	126	07.312.7055.0	108	07.312.9355.0	78
07.201.9227.6	51	07.311.8353.0	126	07.312.7055.0	132	07.312.9455.0	78
07.201.9327.6	51	07.311.8353.0	127	07.312.7055.0	134	07.312.9455.0	86
07.205.1227.0	54	07.311.8855.0	61	07.312.7155.0	76	07.312.9455.6	78
07.205.1327.0	54	07.311.9055.0	36	07.312.7155.0	85	07.312.9555.0	78
07.205.1427.0	54	07.311.9155.0	36	07.312.7155.0	100	07.312.9655.0	99
07.205.5227.0	53	07.311.9455.0	61	07.312.7155.0	132	07.312.9755.0	99
07.205.5327.0	53	07.311.9455.0	61	07.312.7155.0	134	07.313.0055.0	100
07.205.7227.0	53	07.311.9855.0	36	07.312.7155.6	76	07.313.0055.0	108
07.205.7327.0	53	07.312.0053.0	68	07.312.7255.0	76	07.313.0155.0	100
07.205.8227.0	53	07.312.0153.0	68	07.312.7255.0	100	07.313.0155.0	108
07.205.8327.0	53	07.312.0253.0	68	07.312.7255.0	132	07.313.0253.0	138
07.205.9227.0	53	07.312.0353.0	69	07.312.7255.0	134	07.313.0253.0	138
07.205.9327.0	53	07.312.0453.0	43	07.312.7355.0	93	07.313.0253.0	138
07.257.0227.0	29	07.312.0453.0	45	07.312.7355.0	108	07.313.0253.0	139
07.257.0327.0	29	07.312.0453.0	46	07.312.7355.0	136	07.313.0353.0	139
07.257.2027.0	29	07.312.0453.0	46	07.312.7355.0	136	07.313.0455.0	80
07.300.6955.0	47	07.312.0453.0	47	07.312.7355.0	136	07.313.0455.0	87
07.300.7055.0	47	07.312.0453.0	47	07.312.7455.0	93	07.313.0455.6	80
07.310.3153.0	65	07.312.0555.0	28	07.312.7455.0	108	07.313.0555.0	80
07.310.3153.0	65	07.312.0555.0	28	07.312.7455.0	136	07.313.0655.0	80
07.310.3253.0	66	07.312.1255.0	27	07.312.7455.0	136	07.313.0655.0	87
07.310.3353.0	67	07.312.1255.0	27	07.312.7555.0	97	07.313.0655.6	80
07.310.3353.0	67	07.312.1555.0	36	07.312.7655.0	97	07.313.0755.0	80
07.310.3453.0	65	07.312.1655.0	36	07.312.7755.0	95	07.313.0855.0	81
07.310.3453.0	65	07.312.1755.0	24	07.312.7755.0	101	07.313.0855.0	88
07.310.3553.0	66	07.312.1855.0	24	07.312.7755.0	101	07.313.0855.6	81
07.310.3653.0	67	07.312.1955.0	60	07.312.7855.0	95	07.313.0955.0	81
07.310.3653.0	67	07.312.1955.0	60	07.312.7855.0	101	07.313.1055.0	81
07.310.3953.0	66	07.312.2153.0	124	07.312.7855.0	101	07.313.1055.0	88
07.310.4053.0	66	07.312.2153.0	124	07.312.8053.0	127	07.313.1055.6	81
07.310.5855.0	38	07.312.2253.0	124	07.312.8153.0	74	07.313.1155.0	81
07.310.9355.0	29	07.312.2253.0	124	07.312.8153.0	84	07.313.1255.0	82
07.310.9455.0	29	07.312.2953.0	119	07.312.8253.0	74	07.313.1255.0	88
07.311.0653.0	57	07.312.2953.0	121	07.312.8253.0	84	07.313.1255.6	82
07.311.0653.0	57	07.312.2953.6	119	07.312.8353.0	74	07.313.1355.0	82
07.311.0753.0	56	07.312.2953.6	121	07.312.8353.0	84	07.313.1455.0	82
07.311.0853.0	56	07.312.2953.9	119	07.312.8453.0	74	07.313.1455.0	89
07.311.0853.0	56	07.312.2953.9	121	07.312.8453.0	84	07.313.1455.6	82
07.311.0853.6	56	07.312.3153.0	118	07.312.8553.0	74	07.313.1555.0	82
07.311.0853.6	56	07.312.3153.6	118	07.312.8553.0	84	07.313.1655.0	102
07.311.1853.0	56	07.312.3153.9	118	07.312.8653.0	74	07.313.1655.0	104
07.311.1853.0	56	07.312.3553.0	111	07.312.8653.0	84	07.313.1655.0	104
07.311.2053.8	24	07.312.3653.0	111	07.312.8753.0	90	07.313.1755.0	43
07.311.2053.8	29	07.312.4153.0	110	07.312.8753.0	90	07.313.2255.0	47
07.311.2053.8	37	07.312.4153.0	110	07.312.8753.0	90	07.313.2355.0	46
07.311.2153.8	39	07.312.4153.6	110	07.312.8853.0	90	07.313.2455.0	46
07.311.2853.8	56	07.312.4753.0	110	07.312.8853.0	90	07.313.2555.0	14
07.311.2853.8	57	07.312.5653.0	123	07.312.8853.0	90	07.313.2555.0	14
07.311.2853.8	57	07.312.5953.0	117	07.312.8953.0	74	07.313.2555.0	14
07.311.2953.8	56	07.312.6053.0	15	07.312.8953.0	74	07.313.2555.0	15
07.311.3855.0	39	07.312.6053.0	165	07.312.8953.0	84	07.313.2555.0	18
07.311.4155.0	34	07.312.6755.0	76	07.312.8953.0	84	07.313.2555.0	18
07.311.4255.0	38	07.312.6755.0	85	07.312.9055.0	78	07.313.2555.0	18
07.311.4355.0	38	07.312.6755.0	132	07.312.9055.0	86	07.313.2555.0	19
07.311.4655.0	39	07.312.6755.0	134	07.312.9055.0	102	07.313.2655.0	15
07.311.6155.0	31	07.312.6755.6	76	07.312.9055.0	102	07.313.2755.0	15
07.311.6155.0	33	07.312.6855.0	76	07.312.9055.0	103	07.313.2755.0	19
07.311.6555.0	62	07.312.6855.0	132	07.312.9055.0	104	07.313.2855.0	15
07.311.6555.0	62	07.312.6855.0	134	07.312.9055.0	104	07.313.2855.0	22
07.311.6555.0	62	07.312.6955.0	76	07.312.9055.6	78	07.313.2855.0	22

07.313.2855.0	23	25.920.3553.0	111	54.035.7553.0	67	56.397.0255.0	54
07.313.2855.0	23	25.920.3653.0	111	54.035.7553.6	67	56.397.1255.0	54
07.313.2855.0	23	25.920.3753.0	111	55.503.1053.0	56	56.398.0055.0	55
07.313.2855.0	25	25.920.3853.0	111	55.503.1053.6	56	56.398.1055.0	55
07.313.2855.0	25	25.920.3953.0	111	55.503.1253.0	57	56.399.0055.0	55
07.313.2955.0	22	25.920.4053.0	111	55.503.1353.0	57	56.399.0155.0	55
07.313.2955.0	23	25.920.4153.0	111	55.504.1053.0	56	56.399.0255.0	55
07.313.2955.0	23	25.920.4253.0	111	55.504.1053.6	56	56.399.1055.0	55
07.313.2955.0	23	25.920.4353.0	111	55.504.9153.0	56	56.399.1255.0	55
07.313.3155.0	22	25.920.4453.0	111	55.703.0053.0	117	56.404.8855.0	63
07.313.3355.0	25	25.920.4553.0	111	55.703.0053.6	117	56.404.9155.0	63
07.313.3355.0	25	25.920.4653.0	111	55.703.0553.0	120	56.404.9255.0	62
07.313.3355.0	25	30.494.3021.6	60	55.703.0553.6	120	56.404.9455.0	62
07.313.3355.0	26	30.494.3021.6	60	55.703.0553.7	120	56.404.9555.0	62
07.313.4155.0	133	30.494.3021.6	60	55.703.0553.9	120	56.404.9655.0	62
07.313.4155.0	135	30.494.3021.6	123	55.703.1053.0	120	56.404.9755.0	62
07.313.4255.0	133	30.494.3021.6	123	55.703.1053.6	120	56.404.9855.0	62
07.313.4255.0	135	30.494.3021.6	123	55.703.1053.7	120	56.503.7355.0	28
07.313.4355.0	60	30.494.4021.1	145	55.703.1053.9	120	56.503.7455.0	28
07.313.5255.0	133	30.494.4021.6	60	55.703.9053.0	117	56.503.7555.0	28
07.313.5255.0	133	30.494.4021.6	60	56.004.9053.0	68	56.503.7655.0	28
07.313.5255.0	135	30.494.4021.6	60	56.010.9053.0	68	56.503.8355.0	27
07.313.5255.0	135	30.494.4021.6	123	56.016.9053.0	68	56.503.8455.0	27
07.313.5355.0	133	30.494.4021.6	123	56.035.9053.0	69	56.503.8555.0	27
07.313.5355.0	135	30.494.4021.6	123	56.106.0055.0	43	56.510.9255.0	61
07.313.5455.0	133	30.494.4121.0	60	56.106.0155.0	43	56.516.9255.0	61
07.313.5455.0	135	30.494.4121.0	60	56.106.0553.0	45	56.535.9255.0	61
07.340.0353.0	54	30.494.4121.0	60	56.106.0653.0	45	56.702.0053.0	74
07.340.1053.0	54	30.494.4121.0	123	56.106.0755.0	43	56.702.0053.6	74
07.340.1053.0	55	30.494.4121.0	123	56.106.0855.0	43	56.702.2053.0	110
07.340.1053.0	55	30.494.4121.0	123	56.135.1055.0	50	56.702.5053.0	74
07.340.3653.0	53	30.494.4121.0	145	56.170.1055.0	50	56.702.5053.6	74
07.340.3653.0	53	32.530.0053.0	53	56.197.1055.0	50	56.702.5153.0	74
07.340.3753.0	53	32.540.0053.0	53	56.198.1055.0	51	56.702.5153.6	74
07.340.3753.0	53	32.550.0053.0	53	56.199.1055.0	51	56.702.6953.1	90
07.431.7053.8	50	32.560.0053.0	53	56.203.0055.0	132	56.702.7053.0	111
07.431.7153.8	50	37.702.7453.0	114	56.203.0055.6	132	56.702.7653.0	90
07.431.7253.8	50	37.702.7553.0	114	56.203.5055.0	132	56.702.9053.0	84
07.431.7353.8	51	37.702.7653.0	115	56.203.5055.6	132	56.702.9153.0	84
07.431.7353.8	51	37.702.8453.0	114	56.203.5155.0	132	56.702.9253.0	90
25.320.0253.0	37	37.702.8553.0	114	56.203.5155.6	132	56.702.9353.0	84
25.320.1653.0	37	37.702.8653.0	115	56.203.6955.1	136	56.703.0053.0	124
25.320.3253.0	37	37.703.0553.0	118	56.203.7055.0	136	56.703.0053.6	124
25.320.4653.0	37	37.703.0553.6	118	56.203.8653.0	139	56.703.0055.0	76
25.325.0253.0	37	37.703.0553.9	118	56.203.8953.0	138	56.703.0055.6	76
25.325.1653.0	37	37.703.1053.0	118	56.203.8955.0	136	56.703.0553.0	121
25.325.3253.0	37	37.703.1053.6	118	56.203.9055.0	134	56.703.0553.6	121
25.325.4653.0	37	37.703.1053.9	118	56.203.9155.0	134	56.703.0553.7	121
25.360.0253.0	37	38.703.0553.0	119	56.203.9355.0	134	56.703.0553.9	121
25.360.1253.0	37	38.703.0553.6	119	56.203.9453.0	138	56.703.1053.0	121
25.360.3253.0	37	38.703.0553.9	119	56.203.9553.0	139	56.703.1053.6	121
25.360.4253.0	37	38.703.1053.0	119	56.203.9653.0	138	56.703.1053.7	121
25.920.0253.0	111	38.703.1053.6	119	56.203.9753.0	138	56.703.1053.9	121
25.920.0353.0	111	38.703.1053.9	119	56.203.9853.0	138	56.703.2053.0	110
25.920.0453.0	111	39.703.0153.0	118	56.206.0055.0	133	56.703.2053.6	110
25.920.0553.0	111	39.703.0153.6	118	56.206.0055.6	133	56.703.2155.0	108
25.920.0653.0	111	39.703.0153.9	118	56.206.5055.0	133	56.703.2155.6	108
25.920.0753.0	111	39.703.0253.0	118	56.206.5055.6	133	56.703.2255.0	108
25.920.0853.0	111	39.703.0253.6	118	56.206.5155.0	133	56.703.2355.0	108
25.920.0953.0	111	39.703.0253.9	118	56.206.5155.6	133	56.703.2355.6	108
25.920.1053.0	111	54.003.7553.0	65	56.206.9055.0	135	56.703.2455.0	108
25.920.1153.0	111	54.003.7553.6	65	56.206.9155.0	135	56.703.2955.1	96
25.920.1253.0	111	54.004.7553.0	65	56.206.9355.0	135	56.703.3055.0	96
25.920.1353.0	111	54.004.7553.6	65	56.395.0055.0	54	56.703.3255.0	97
25.920.1453.0	111	54.010.7553.0	66	56.395.0155.0	54	56.703.3355.0	97
25.920.1553.0	111	54.010.7553.6	66	56.395.0255.0	54	56.703.3455.0	108
25.920.1653.0	111	54.016.7553.0	66	56.395.1055.0	54	56.703.3555.1	108
25.920.3253.0	111	54.016.7553.6	66	56.395.1255.0	54	56.703.3655.0	108
25.920.3353.0	111	54.025.7553.0	67	56.397.0055.0	54	56.703.4755.0	92
25.920.3453.0	111	54.025.7553.6	67	56.397.0155.0	54	56.703.4855.1	92

Part number | page

56.703.4955.0	92	56.704.7855.0	99	57.503.2655.0	36	57.904.4355.0	40
56.703.5055.0	76	56.704.7955.5	99	57.503.2755.0	36	57.904.4455.0	40
56.703.5055.6	76	56.704.8055.9	99	57.503.2855.0	36	57.904.4555.0	40
56.703.5155.0	76	56.704.8153.0	123	57.503.3055.6	36	57.904.4655.0	40
56.703.5155.6	76	56.704.8255.5	99	57.503.7055.0	29	57.904.4755.0	40
56.703.5355.0	100	56.704.8355.5	99	57.503.7155.0	29	57.904.4855.0	40
56.703.5455.0	100	56.704.8453.0	97	57.503.7255.0	29	57.904.4955.0	40
56.703.5555.0	100	56.704.9053.0	124	57.503.7855.0	28	57.904.5055.0	40
56.703.5955.1	94	56.704.9055.0	86	57.503.7955.0	28	57.904.5155.0	40
56.703.6055.0	94	56.704.9155.0	86	57.503.8055.0	28	57.904.5355.0	34
56.703.6155.0	95	56.704.9255.0	98	57.503.8855.0	27	57.904.5455.0	34
56.703.6255.0	94	56.704.9355.0	86	57.503.8955.0	27	57.904.5555.0	34
56.703.6355.0	94	56.704.XX55.5	99	57.503.9055.0	27	57.904.5655.0	34
56.703.6455.0	95	56.704.XX55.9	99	57.504.1655.0	32	57.904.5755.0	34
56.703.6555.0	101	56.706.0053.0	124	57.504.1755.0	32	57.904.5855.0	34
56.703.6655.0	101	56.706.0053.6	124	57.504.2055.0	32	57.904.6355.0	34
56.703.6955.1	91	56.706.0055.0	80	57.504.2055.6	32	57.904.6455.0	34
56.703.7055.0	91	56.706.0055.6	80	57.504.2355.0	32	57.904.6555.0	34
56.703.7155.5	93	56.706.5055.0	80	57.504.3655.0	39	57.904.6655.0	34
56.703.7155.9	93	56.706.5055.6	80	57.504.3755.0	39	57.904.6755.0	34
56.703.7355.5	93	56.706.9053.0	124	57.504.4055.0	30	57.904.6855.0	34
56.703.7555.5	93	56.706.9055.0	87	57.504.4055.0	30	57.904.7055.0	40
56.703.7555.9	93	56.706.9355.0	87	57.504.4055.0	31	57.904.7155.0	40
56.703.7655.0	91	56.710.0053.0	125	57.504.4055.0	31	57.904.7255.0	40
56.703.7755.0	93	56.710.0053.6	125	57.504.4455.0	33	57.904.7355.0	40
56.703.7855.0	93	56.710.0055.0	81	57.504.4555.0	33	57.904.7455.0	40
56.703.7955.5	93	56.710.0055.0	83	57.504.4855.0	33	57.910.4955.0	35
56.703.8055.9	93	56.710.0055.6	81	57.504.6255.0	38	57.910.5055.0	35
56.703.8255.5	93	56.710.0055.6	83	57.504.6355.0	38	57.910.5155.0	35
56.703.8355.5	93	56.710.5055.0	81	57.504.7355.0	38	57.910.5255.0	35
56.703.8653.0	127	56.710.5055.0	83	57.506.0555.0	46	57.910.5355.0	35
56.703.8855.0	96	56.710.5055.6	81	57.510.0555.0	46	57.910.5455.0	35
56.703.8955.0	91	56.710.5055.6	83	57.510.1155.0	61	57.910.5755.0	35
56.703.9053.0	124	56.710.8153.0	123	57.510.1155.6	61	57.910.5855.0	35
56.703.9055.0	85	56.710.9053.0	125	57.510.8255.0	60	57.910.6155.0	35
56.703.9155.0	85	56.710.9055.0	88	57.516.1155.0	61	58.503.0055.0	14
56.703.9253.0	110	56.710.9355.0	88	57.516.1155.6	61	58.503.0055.6	14
56.703.9355.0	85	56.716.0053.0	125	57.516.8255.0	60	58.503.2055.0	23
56.703.9453.0	126	56.716.0053.6	125	57.535.0155.0	16	58.503.2055.6	23
56.703.9553.0	127	56.716.0055.0	82	57.535.0155.6	16	58.503.2155.0	23
56.703.9653.0	126	56.716.0055.6	82	57.535.1155.0	61	58.503.2155.6	23
56.703.9753.0	126	56.716.0353.0	77	57.535.1155.6	61	58.503.2355.0	23
56.703.9853.0	126	56.716.0353.0	79	57.535.9055.0	20	58.503.9055.0	18
56.703.9953.0	126	56.716.0353.0	105	57.570.0155.0	16	58.504.0055.0	14
56.703.XX55.5	93	56.716.1155.0	125	57.570.0155.6	16	58.504.0055.6	14
56.703.XX55.9	93	56.716.1155.6	125	57.570.9055.0	20	58.504.2055.0	23
56.704.0053.0	124	56.716.5055.0	82	57.570.9855.0	17	58.504.2055.6	23
56.704.0053.6	124	56.716.5055.6	82	57.570.9955.0	17	58.504.2355.0	23
56.704.0055.0	78	56.716.8155.0	123	57.597.0155.0	16	58.504.4155.0	23
56.704.0055.6	78	56.716.9053.0	125	57.597.0155.6	16	58.504.5055.0	22
56.704.4055.0	102	56.716.9055.0	88	57.597.9855.0	17	58.504.5055.6	22
56.704.4055.0	102	56.716.9155.0	125	57.597.9955.0	17	58.504.5155.0	22
56.704.4055.0	103	56.716.9355.0	89	57.904.0055.0	40	58.504.5155.6	22
56.704.4055.0	103	56.735.0053.0	82	57.904.0155.0	40	58.504.6155.0	60
56.704.4155.0	104	56.735.0053.0	83	57.904.0255.0	40	58.504.6955.1	25
56.704.4255.0	104	56.735.0053.6	82	57.904.0355.0	40	58.504.7055.0	25
56.704.5055.0	78	56.735.0053.6	83	57.904.0455.0	40	58.504.7055.6	25
56.704.5055.6	78	56.735.9053.0	89	57.904.0555.0	40	58.504.7255.9	26
56.704.5155.0	78	57.016.5055.0	47	57.904.0655.0	40	58.504.7355.9	26
56.704.5155.6	78	57.106.1055.0	47	57.904.0755.0	40	58.504.7455.9	26
56.704.5355.0	104	57.106.1155.0	47	57.904.0855.0	40	58.504.7955.9	26
56.704.6955.1	98	57.110.1555.0	41	57.904.0955.0	40	58.504.8055.9	26
56.704.7055.0	98	57.110.1655.0	41	57.904.1055.0	40	58.504.8155.9	26
56.704.7155.5	99	57.403.6955.1	24	57.904.1155.0	40	58.504.8255.9	26
56.704.7155.9	99	57.403.7055.0	24	57.904.2055.0	40	58.504.8355.9	26
56.704.7355.5	99	57.503.2055.0	36	57.904.2555.0	40	58.504.8755.9	26
56.704.7555.5	99	57.503.2155.0	36	57.904.2855.0	40	58.504.8855.9	26
56.704.7555.9	99	57.503.2255.0	36	57.904.3955.0	40	58.504.9055.0	18
56.704.7655.0	98	57.503.2355.0	36	57.904.4155.0	40	58.504.9155.0	22
56.704.7755.0	99	57.503.2555.6	36	57.904.4255.0	40	58.504.9255.0	25

58.504.9355.0	22	98.190.0000.0	147	Z1.299.3055.0	103	Z5.523.5653.0	149
58.504.XX55.9	26	98.190.1000.0	147	Z1.299.3155.0	31	Z5.523.5753.0	149
58.506.0055.0	14	98.210.0000.0	147	Z1.299.3155.0	103	Z5.523.9353.0	148
58.506.0055.6	14	98.220.0000.0	147	Z1.299.3255.0	31	Z5.523.9453.0	148
58.506.9055.0	18	98.290.0000.0	60	Z1.299.3255.0	103	Z5.553.2921.0	77
58.510.0055.0	15	98.290.0000.0	60	Z1.299.3355.0	31	Z5.553.2921.0	79
58.510.0055.6	15	98.290.0000.0	60	Z1.299.3355.0	103	Z5.553.2921.0	80
58.510.9055.0	19	98.290.0000.0	62	Z1.299.4055.0	31	Z5.553.2921.0	81
58.516.0055.0	15	98.290.1000.0	60	Z1.299.4055.0	63	Z5.553.2921.0	83
58.516.0055.6	15	98.290.1000.0	60	Z1.299.4055.0	103	Z5.553.2921.0	86
58.516.9055.0	19	98.290.1000.0	60	Z1.299.4155.0	31	Z5.553.2921.0	87
59.903.0155.0	109	98.290.1000.0	62	Z1.299.4155.0	63	Z5.553.2921.0	89
59.903.0255.0	109	98.290.1000.0	123	Z1.299.4155.0	103	Z5.553.2921.0	89
59.903.0355.0	109	98.290.1000.0	123	Z1.299.4255.0	31	Z5.553.2921.0	95
59.903.0455.0	109	98.290.1000.0	123	Z1.299.4255.0	63	Z5.553.2921.0	101
59.903.0555.0	109	98.290.1000.0	126	Z1.299.4255.0	103	Z5.553.2921.0	102
59.903.0655.0	109	98.290.1000.0	126	Z1.299.9753.0	15	Z5.553.2921.0	103
59.903.0755.0	109	98.290.1000.0	126	Z1.299.9753.0	77	Z5.553.2921.0	132
59.903.0855.0	109	98.290.1000.0	127	Z1.299.9753.0	79	Z5.553.2921.0	133
59.903.0955.0	109	98.290.1000.0	138	Z1.299.9753.0	95	Z5.553.2921.0	134
59.903.1055.0	109	98.290.1000.0	138	Z1.299.9753.0	101	Z5.553.2921.0	135
69.700.0953.0	115	98.290.1000.0	138	Z1.299.9753.0	109	Z5.553.2921.0	137
69.700.1853.0	115	98.290.1000.0	139	Z1.299.9753.0	132	Z5.553.2921.0	165
69.920.0553.0	148	98.290.1000.0	145	Z1.299.9753.0	134	Z5.553.2921.1	165
69.920.0653.0	149	98.300.0000.0	146	Z1.299.9753.0	137	Z5.553.2921.6	165
69.920.0753.0	149	98.300.0010.0	146	Z1.299.9753.0	165	Z5.553.3121.0	165
69.920.1053.0	148	98.300.1000.0	146	Z1.980.0040.0	144	Z7.211.0027.0	62
69.920.1253.0	148	98.360.0000.0	146	Z1.980.0253.0	145	Z7.211.0027.0	62
95.101.1100.0	167	98.360.0004.0	146	Z2.302.0421.0	21	Z7.211.0027.0	62
95.101.1200.0	167	98.370.0000.0	146	Z2.302.0621.0	21	Z7.211.0027.0	63
95.101.1300.0	167	98.370.1000.0	146	Z2.302.1321.0	144	Z7.211.0027.0	63
95.300.0500.0	166	98.370.1001.0	146	Z2.803.3010.0	144	Z7.211.0027.0	65
95.350.0100.0	167	98.375.1000.0	146	Z2.803.3110.0	144	Z7.211.0227.0	38
95.502.0100.0	159	98.380.0000.0	146	Z2.803.3210.0	144	Z7.211.0227.0	62
95.502.0118.0	159	98.400.0000.0	144	Z2.803.3310.0	144	Z7.211.0227.0	62
95.502.0125.0	159	99.013.9999.9	164	Z2.803.4010.0	144	Z7.211.0227.0	62
95.502.0125.1	159	99.014.9999.9	164	Z2.803.4110.0	144	Z7.211.0227.0	63
95.502.0135.0	159	99.015.9999.9	164	Z2.803.4210.0	144	Z7.211.0227.0	63
95.502.0135.1	159	99.031.9999.9	164	Z2.803.4310.0	144	Z7.211.0227.0	65
95.502.0150.0	159	99.032.9999.9	164	Z2.803.5010.0	144	Z7.211.0327.0	38
95.502.0170.0	159	99.033.9999.9	164	Z2.803.5110.0	144	Z7.211.0327.0	62
95.502.0197.0	159	99.034.9999.9	164	Z2.803.5210.0	144	Z7.211.0327.0	63
95.502.0198.0	159	Z1.108.8453.0	149	Z2.803.5310.0	144	Z7.211.0327.0	65
95.502.0199.0	159	Z1.110.8855.0	109	Z2.803.6010.0	144	Z7.211.0427.0	65
95.502.0225.1	159	Z1.110.8855.6	109	Z2.803.6110.0	144	Z7.211.0527.0	62
95.502.0235.1	159	Z1.110.8855.7	109	Z2.803.6210.0	144	Z7.211.0527.0	62
95.502.0604.0	159	Z1.110.8955.0	109	Z4.242.5053.0	159	Z7.211.0527.0	63
95.502.0607.0	159	Z1.110.8955.6	109	Z4.242.5153.0	159	Z7.211.0527.0	65
95.502.0612.0	159	Z1.110.8955.7	109	Z4.242.6053.0	159	Z7.211.0627.0	38
95.502.0613.0	159	Z1.110.9055.0	109	Z4.242.6353.0	159	Z7.211.0627.0	65
95.502.0620.0	159	Z1.110.9055.6	109	Z4.242.8053.0	159	Z7.212.0227.0	66
95.502.0625.0	159	Z1.110.9055.7	109	Z4.243.2053.0	159	Z7.212.0327.0	66
95.502.0627.0	159	Z1.298.1053.0	30	Z4.243.2053.0	160	Z7.212.0427.0	66
95.502.0628.0	159	Z1.298.1053.0	102	Z4.243.8453.0	148	Z7.212.0527.0	66
95.502.0700.0	159	Z1.298.1153.0	30	Z4.243.8453.0	149	Z7.212.0627.0	66
95.502.0710.0	159	Z1.298.1153.0	102	Z5.511.3553.0	43	Z7.212.1227.0	45
95.502.0710.2	159	Z1.298.1253.0	30	Z5.511.3553.6	43	Z7.212.1327.0	45
95.502.0710.3	159	Z1.298.1253.0	102	Z5.511.3553.7	43	Z7.212.1427.0	45
95.502.0710.4	159	Z1.298.1353.0	30	Z5.511.3553.8	43	Z7.212.1527.0	45
95.502.0710.5	159	Z1.298.1353.0	102	Z5.511.3553.9	43	Z7.212.2027.0	45
95.502.0710.7	159	Z1.298.1653.0	30	Z5.515.3310.0	145	Z7.212.2227.0	45
95.502.0711.0	159	Z1.298.1653.0	102	Z5.515.3410.0	145	Z7.212.2327.0	45
95.503.0000.0	152	Z1.298.1753.0	30	Z5.516.2511.0	147	Z7.212.2427.0	45
95.503.0010.1	152	Z1.298.1753.0	102	Z5.516.2711.0	147	Z7.213.0227.0	67
95.503.0010.5	152	Z1.298.1853.0	30	Z5.516.2811.0	147	Z7.213.0327.0	67
95.503.0012.0	152	Z1.298.1853.0	102	Z5.519.0310.0	145	Z7.213.0427.0	67
95.503.0013.0	152	Z1.298.1953.0	30	Z5.519.0410.0	145	Z7.213.0527.0	67
95.503.0014.0	152	Z1.298.1953.0	102	Z5.522.5010.0	149	Z7.213.0627.0	67
98.090.0000.0	147	Z1.298.2053.0	102	Z5.522.7553.0	149	Z7.214.0227.0	66
98.090.0015.0	147	Z1.299.3055.0	31	Z5.522.8553.0	148	Z7.214.0327.0	66

Part number | page

Z7.214.0427.0	66	Z7.261.1227.0	23	Z7.261.1927.0	103	Z7.271.5227.0	63
Z7.214.0527.0	66	Z7.261.1227.0	23	Z7.261.1927.0	105	Z7.271.5227.0	63
Z7.214.0627.0	66	Z7.261.1227.0	25	Z7.261.1927.0	164	Z7.280.0227.0	29
Z7.215.0027.0	65	Z7.261.1227.0	25	Z7.261.2027.0	14	Z7.280.0327.0	29
Z7.215.0227.0	65	Z7.261.1227.0	79	Z7.261.2027.0	22	Z7.280.0627.0	29
Z7.215.0327.0	65	Z7.261.1227.0	99	Z7.261.2027.0	22	Z7.280.2227.0	24
Z7.215.0427.0	65	Z7.261.1227.0	102	Z7.261.2027.0	23	Z7.280.2227.0	37
Z7.215.0527.0	65	Z7.261.1227.0	103	Z7.261.2027.0	23	Z7.280.2327.0	24
Z7.215.0627.0	65	Z7.261.1227.0	105	Z7.261.2027.0	25	Z7.280.2327.0	37
Z7.215.4027.0	56	Z7.261.1227.0	123	Z7.261.2027.0	25	Z7.280.3227.0	24
Z7.215.4027.0	57	Z7.261.1227.0	124	Z7.261.2027.0	79	Z7.280.3227.0	37
Z7.215.4027.0	57	Z7.261.1227.0	164	Z7.261.2027.0	99	Z7.280.6227.0	14
Z7.215.4227.0	56	Z7.261.1327.0	14	Z7.261.2027.0	102	Z7.280.6227.0	23
Z7.215.4227.0	57	Z7.261.1327.0	22	Z7.261.2027.0	103	Z7.280.6227.0	77
Z7.215.4227.0	57	Z7.261.1327.0	22	Z7.261.2027.0	123	Z7.280.6227.0	93
Z7.215.4327.0	56	Z7.261.1327.0	25	Z7.261.2027.0	124	Z7.280.6227.0	95
Z7.215.4327.0	57	Z7.261.1327.0	25	Z7.261.2027.0	164	Z7.280.6227.0	97
Z7.215.4327.0	57	Z7.261.1327.0	79	Z7.267.0227.5	27	Z7.280.6227.0	101
Z7.215.4627.0	56	Z7.261.1327.0	99	Z7.267.0227.5	28	Z7.280.6227.0	109
Z7.215.4627.0	57	Z7.261.1327.0	102	Z7.267.0227.6	27	Z7.280.6227.0	111
Z7.215.4627.0	57	Z7.261.1327.0	103	Z7.267.0227.6	28	Z7.280.6227.0	124
Z7.216.0227.0	67	Z7.261.1327.0	105	Z7.267.0327.5	27	Z7.280.6227.0	126
Z7.216.0327.0	67	Z7.261.1327.0	123	Z7.267.0327.5	28	Z7.280.6227.0	126
Z7.216.0427.0	67	Z7.261.1327.0	124	Z7.267.0327.6	27	Z7.280.6227.0	126
Z7.216.0527.0	67	Z7.261.1327.0	164	Z7.267.0327.6	28	Z7.280.6227.0	127
Z7.216.0627.0	67	Z7.261.1427.0	14	Z7.267.1227.5	27	Z7.280.6227.0	127
Z7.220.0227.0	38	Z7.261.1427.0	22	Z7.267.1227.5	28	Z7.280.6227.0	132
Z7.220.0227.0	38	Z7.261.1427.0	22	Z7.267.1227.6	27	Z7.280.6227.0	137
Z7.220.0627.0	38	Z7.261.1427.0	25	Z7.267.1227.6	28	Z7.280.6227.0	138
Z7.250.5227.0	47	Z7.261.1427.0	25	Z7.268.0227.0	75	Z7.280.6227.0	138
Z7.250.5227.0	47	Z7.261.1427.0	79	Z7.268.0227.0	90	Z7.280.6227.0	138
Z7.250.5327.0	47	Z7.261.1427.0	99	Z7.268.0227.0	90	Z7.280.6227.0	139
Z7.250.5327.0	47	Z7.261.1427.0	102	Z7.268.0227.0	164	Z7.280.6227.0	139
Z7.250.5427.0	47	Z7.261.1427.0	103	Z7.268.0327.0	75	Z7.280.6227.0	164
Z7.250.5427.0	47	Z7.261.1427.0	105	Z7.268.0327.0	164	Z7.280.6327.0	14
Z7.255.0227.0	164	Z7.261.1427.0	164	Z7.268.0427.0	75	Z7.280.6327.0	77
Z7.255.0227.0	164	Z7.261.1527.0	14	Z7.268.0427.0	164	Z7.280.6327.0	93
Z7.255.4227.0	31	Z7.261.1527.0	22	Z7.268.0527.0	75	Z7.280.6327.0	95
Z7.255.4227.0	33	Z7.261.1527.0	22	Z7.268.0527.0	90	Z7.280.6327.0	97
Z7.255.4227.0	164	Z7.261.1527.0	23	Z7.268.0527.0	90	Z7.280.6327.0	101
Z7.255.4227.0	164	Z7.261.1527.0	23	Z7.268.0527.0	164	Z7.280.6327.0	109
Z7.255.4327.0	31	Z7.261.1527.0	25	Z7.268.1027.0	75	Z7.280.6327.0	111
Z7.255.4327.0	33	Z7.261.1527.0	25	Z7.268.1027.0	90	Z7.280.6327.0	124
Z7.255.4627.0	31	Z7.261.1527.0	79	Z7.268.1027.0	90	Z7.280.6327.0	126
Z7.255.4627.0	33	Z7.261.1527.0	99	Z7.268.1027.0	164	Z7.280.6327.0	126
Z7.255.8227.0	43	Z7.261.1527.0	102	Z7.268.2027.0	75	Z7.280.6327.0	126
Z7.255.8227.0	164	Z7.261.1527.0	103	Z7.268.2027.0	90	Z7.280.6327.0	127
Z7.255.8327.0	43	Z7.261.1527.0	105	Z7.268.2027.0	90	Z7.280.6327.0	127
Z7.255.8327.0	164	Z7.261.1527.0	164	Z7.268.2027.0	164	Z7.280.6327.0	132
Z7.255.8427.0	43	Z7.261.1627.0	79	Z7.269.2923.0	65	Z7.280.6327.0	137
Z7.255.8527.0	43	Z7.261.1627.0	99	Z7.269.3023.0	66	Z7.280.6327.0	138
Z7.255.8627.0	43	Z7.261.1627.0	102	Z7.269.3123.0	66	Z7.280.6327.0	138
Z7.256.8427.0	164	Z7.261.1627.0	103	Z7.269.3223.0	67	Z7.280.6327.0	138
Z7.256.8527.0	164	Z7.261.1627.0	105	Z7.269.3423.0	67	Z7.280.6327.0	139
Z7.256.8527.0	164	Z7.261.1627.0	164	Z7.269.3523.0	65	Z7.280.6327.0	139
Z7.260.0029.0	117	Z7.261.1727.0	79	Z7.270.0227.0	27	Z7.280.6327.0	164
Z7.260.0229.0	117	Z7.261.1727.0	99	Z7.270.0227.0	28	Z7.280.6427.0	14
Z7.260.0329.0	117	Z7.261.1727.0	102	Z7.270.0327.0	27	Z7.280.6427.0	77
Z7.260.0429.0	117	Z7.261.1727.0	103	Z7.270.0327.0	28	Z7.280.6427.0	93
Z7.260.0529.0	117	Z7.261.1727.0	105	Z7.270.1227.0	27	Z7.280.6427.0	95
Z7.260.1029.0	117	Z7.261.1727.0	164	Z7.270.1227.0	28	Z7.280.6427.0	97
Z7.261.1027.0	105	Z7.261.1827.0	79	Z7.271.2227.0	56	Z7.280.6427.0	101
Z7.261.1127.0	93	Z7.261.1827.0	99	Z7.271.2327.0	56	Z7.280.6427.0	109
Z7.261.1127.0	95	Z7.261.1827.0	102	Z7.271.3227.0	56	Z7.280.6427.0	111
Z7.261.1127.0	97	Z7.261.1827.0	103	Z7.271.4227.0	39	Z7.280.6427.0	126
Z7.261.1127.0	99	Z7.261.1827.0	105	Z7.271.4327.0	39	Z7.280.6427.0	127
Z7.261.1127.0	164	Z7.261.1827.0	164	Z7.271.5227.0	39	Z7.280.6427.0	127
Z7.261.1227.0	14	Z7.261.1927.0	79	Z7.271.5227.0	62	Z7.280.6427.0	132
Z7.261.1227.0	22	Z7.261.1927.0	99	Z7.271.5227.0	62	Z7.280.6427.0	137
Z7.261.1227.0	22	Z7.261.1927.0	102	Z7.271.5227.0	62	Z7.280.6427.0	164

Z7.280.6527.0	14	Z7.280.8027.0	111	Z7.284.9327.0	61
Z7.280.6527.0	23	Z7.280.8027.0	132	Z7.284.9427.0	61
Z7.280.6527.0	77	Z7.280.8027.0	137	Z7.284.9527.0	61
Z7.280.6527.0	93	Z7.280.8027.0	138	Z7.285.2227.0	16
Z7.280.6527.0	95	Z7.280.8027.0	138	Z7.285.2327.0	16
Z7.280.6527.0	97	Z7.280.8027.0	138	Z7.285.2627.0	16
Z7.280.6527.0	101	Z7.280.8027.0	139	Z7.285.3227.0	16
Z7.280.6527.0	109	Z7.280.8027.0	139	Z7.285.4227.0	61
Z7.280.6527.0	111	Z7.280.8027.0	164	Z7.285.4327.0	61
Z7.280.6527.0	126	Z7.281.1227.0	39	Z7.285.4427.0	61
Z7.280.6527.0	127	Z7.281.1327.0	39	Z7.285.4527.0	61
Z7.280.6527.0	127	Z7.281.2227.0	39	Z7.285.6227.0	82
Z7.280.6527.0	132	Z7.281.3227.0	38	Z7.285.6227.0	89
Z7.280.6527.0	137	Z7.281.3327.0	38	Z7.285.6227.0	164
Z7.280.6527.0	164	Z7.281.3627.0	38	Z7.285.6427.0	81
Z7.280.6627.0	77	Z7.282.2227.0	46	Z7.285.6427.0	83
Z7.280.6627.0	101	Z7.282.2327.0	46	Z7.285.6427.0	164
Z7.280.6627.0	109	Z7.282.3227.0	46	Z7.286.3227.0	16
Z7.280.6627.0	111	Z7.282.4227.0	124	Z7.286.3327.0	16
Z7.280.6627.0	137	Z7.282.5227.0	14	Z7.286.3627.0	16
Z7.280.6627.0	164	Z7.282.5227.0	80	Z7.287.0227.0	34
Z7.280.6727.0	77	Z7.282.5227.0	87	Z7.287.0327.0	34
Z7.280.6727.0	101	Z7.282.5227.0	133	Z7.287.0627.0	34
Z7.280.6727.0	109	Z7.282.5227.0	164	Z7.287.1227.0	16
Z7.280.6727.0	111	Z7.282.5327.0	14	Z7.287.1327.0	16
Z7.280.6727.0	137	Z7.282.5327.0	80	Z7.287.1627.0	16
Z7.280.6727.0	164	Z7.282.5327.0	87	Z7.311.1755.0	163
Z7.280.6827.0	77	Z7.282.5327.0	133	Z7.311.2755.0	163
Z7.280.6827.0	101	Z7.282.5427.0	14	Z7.311.7055.0	163
Z7.280.6827.0	109	Z7.282.5427.0	80	Z7.409.5753.0	54
Z7.280.6827.0	111	Z7.282.5427.0	87	Z7.409.5853.0	54
Z7.280.6827.0	137	Z7.282.5427.0	133	Z7.409.5853.0	55
Z7.280.6827.0	164	Z7.282.5527.0	14	Z7.409.5853.0	55
Z7.280.6927.0	77	Z7.282.5527.0	80		
Z7.280.6927.0	101	Z7.282.5527.0	87		
Z7.280.6927.0	109	Z7.282.5527.0	133		
Z7.280.6927.0	111	Z7.282.5527.0	164		
Z7.280.6927.0	137	Z7.282.6229.0	43		
Z7.280.6927.0	164	Z7.282.6329.0	43		
Z7.280.7027.0	14	Z7.282.6429.0	43		
Z7.280.7027.0	23	Z7.282.6529.0	43		
Z7.280.7027.0	77	Z7.282.6629.0	43		
Z7.280.7027.0	93	Z7.282.7229.0	43		
Z7.280.7027.0	95	Z7.282.7329.0	43		
Z7.280.7027.0	97	Z7.282.7429.0	43		
Z7.280.7027.0	101	Z7.283.2227.0	46		
Z7.280.7027.0	109	Z7.283.2227.0	47		
Z7.280.7027.0	111	Z7.283.2227.0	61		
Z7.280.7027.0	124	Z7.283.2327.0	46		
Z7.280.7027.0	126	Z7.283.2327.0	47		
Z7.280.7027.0	126	Z7.283.2327.0	61		
Z7.280.7027.0	126	Z7.283.2427.0	61		
Z7.280.7027.0	127	Z7.283.2527.0	61		
Z7.280.7027.0	127	Z7.283.3227.0	46		
Z7.280.7027.0	132	Z7.283.3227.0	47		
Z7.280.7027.0	137	Z7.283.8227.0	15		
Z7.280.7027.0	138	Z7.283.8227.0	81		
Z7.280.7027.0	138	Z7.283.8227.0	89		
Z7.280.7027.0	138	Z7.283.8227.0	123		
Z7.280.7027.0	139	Z7.283.8227.0	125		
Z7.280.7027.0	139	Z7.283.8227.0	164		
Z7.280.7027.0	164	Z7.284.4227.0	15		
Z7.280.8027.0	14	Z7.284.4227.0	82		
Z7.280.8027.0	23	Z7.284.4227.0	82		
Z7.280.8027.0	77	Z7.284.4227.0	89		
Z7.280.8027.0	93	Z7.284.4227.0	123		
Z7.280.8027.0	95	Z7.284.4227.0	125		
Z7.280.8027.0	97	Z7.284.4227.0	125		
Z7.280.8027.0	101	Z7.284.4227.0	164		
Z7.280.8027.0	109	Z7.284.9227.0	61		

Technical consultation and general information

Hotline – one call is all it takes

Industrial Automation – Electromechanical

Hotline **+49 951 9324-991**

E-Mail **AT.TS@wieland-electric.com**

Building and Installation Technology

Hotline **+49 951 9324-996**

E-Mail **BIT.TS@wieland-electric.com**

Industrial Automation – Electronics

Hotline **+49 951 9324-995**

E-Mail **AT.TS@wieland-electric.com**

Safety Technology

Hotline **+49 951 9324-999**

E-Mail **safety@wieland-electric.com**



General information and news:
www.wieland-electric.com

Visit our e-catalog at
<http://eshop.wieland-electric.com>



Our subsidiaries

... and the addresses of our sales partner worldwide are available at:
www.wieland-electric.com



USA
Wieland Electric Inc.
North American Headquarters
 2889 Brighton Road
 Oakville, Ontario L6H 6C9
 Phone +1 905 8298414
 Fax +1 905 8298413
www.wielandinc.com



CANADA
Wieland Electric Inc.
North American Headquarters
 2889 Brighton Road
 Oakville, Ontario L6H 6C9
 Phone +1 905 8298414
 Fax +1 905 8298413
www.wieland-electric.ca



GREAT BRITAIN
Wieland Electric Ltd.
 Riverside Business Center,
 Walnut Tree Close
 GB-Guildford/Surrey GU1 4UG
 Phone +44 1483 531213
 Fax +44 1483 505029
sales.uk@wieland-electric.com
www.wieland.co.uk



FRANCE
Wieland Electric SARL.
 Le Cérame, Hall 6
 47, avenue des Genottes
 CS 48313
 95803 Cergy-Pontoise Cedex
 Phone +33 1 30320707
 Fax +33 1 30320714
info.france@wieland-electric.com
www.wieland-electric.fr



SPAIN
Wieland Electric S.L.
 C/ Maria Auxiliadora 2, bajos
 E-08017 Barcelona
 Phone +34 93 2523820
 Fax +34 93 2523825
ventas@wieland-electric.com
www.wieland-electric.es



ITALY
Wieland Electric S.r.l.
 Via Edison, 209
 I-20019 Settimo Milanese
 Phone +39 02 48916357
 Fax +39 02 48920685
info.italy@wieland-electric.com
www.wieland-electric.it



BELGIUM & GD LUXEMBOURG
ATEM-Wieland Electric NV
 Bedrijvenpark De Veert 4
 B-2830 Willebroek
 Phone +32 3 8661800
 Fax +32 3 8661828
info.belgium@wieland-electric.com
www.wieland-electric.be



DENMARK
Wieland Electric A/S
 Vallørækken 26
 DK-4600 Køge
 Phone +45 70 266635
 Fax +45 70 266637
sales.denmark@wieland-electric.com
www.wieland-electric.dk



SWITZERLAND
Wieland Electric AG
 Harzachstrasse 2b
 CH-8404 Winterthur
 Phone +41 52 2352100
 Fax +41 52 2352119
info.swiss@wieland-electric.com
www.wieland-electric.ch



POLAND
Wieland Electric Sp. Zo.o.
 Św. Antoniego 8
 62-080 Swadzim
 Phone +48 61 2225400
 Fax +48 61 8407166
office@wieland-electric.pl
www.wieland-electric.pl



CHINA
Wieland Electric Trading
 Unit 2703 International Soho City
 889 Renmin Road,
 Huang Pu District
 PRC- Shanghai 200010
 Phone +86 21 63555833
 Fax +86 21 63550090
info-shanghai@wieland-electric.com
www.wieland-electric.cn



JAPAN
Wieland Electric Co, Ltd.
 Nisso No. 16 Bldg. 7F
 3-8-8 Shin-Yokohama,
 Kohoku-ku
 Yokohama 222-0033
 Phone +81 45 473 5085
 Fax +81 45 470 5408
info.japan@wieland-electric.com



GERMANY
Headquarters
Wieland Electric GmbH
 Brennerstraße 10 – 14
 96052 Bamberg, Germany
 Phone +49 951 9324-0
 Fax +49 951 9324-198
info@wieland-electric.com
www.wieland-electric.de



Headquarters:
Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg, Germany

Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com
www.wieland-electric.com

Industrial technology

Solutions for the control cabinet

- DIN rail terminal blocks
 - Screw, tension spring or push-in connection technology
 - Wire cross sections up to 300 mm²
 - Numerous special functions
 - Software solutions interfacing to CAE systems
- Safety
 - Safe signal acquisition
 - Safety switching devices
 - Modular safety modules
 - Compact safety controllers
 - Application consulting and training
- Network engineering and fieldbus systems
 - Remote maintenance via VPN industrial router and VPN service portal
 - Industrial Ethernet switches
 - PLC and I/O systems, standard and increased environmental conditions
- Interface
 - Power supply units
 - Overvoltage protection
 - Coupling relays, semiconductor switches
 - Timer relays, measuring and monitoring relays
 - Analog coupling and converter modules
 - Passive interfaces

Solutions for field applications

- Decentralized installation and automation technology
 - Electrical installation for wind tower
 - Fieldbus interfaces and motor starters
- Connectors for industrial applications
 - Rectangular and round connectors
 - Aluminium or plastic housings
 - Degree of protection up to IP 69
 - Current-carrying capacity up to 100 A
 - Connectors for hazardous areas
 - Modular, application-specific technology

PC board terminals and connectors

- Screw or spring clamp connection technology
- Spacings: 3.5 mm to 10.16 mm
- Reflow or wave soldering process

Building and installation technology

- Building installation systems
 - Main power supply connectors IP 20/IP 65 ... IP 69
 - Bus connectors
 - Low-voltage connectors
 - Power distribution system with flat cables
 - Distribution systems
 - Room automation with KNX and wireless technology
 - DIN rail terminal blocks for electrical installations
 - Overvoltage protection